

RF312-TP Temperature Data Logger with Thermistor Probe

New!

The RF312-TP data logger measures and records temperature via a range of Comark thermistor probes. The probe can be used in a wide range of temperature situations such as walk-in and reach-in freezers and refrigerators, blast chillers, hot and chilled food storage cabinets.

Diligence WiFi software will allow set up, data logging and data review. Set up features include data logger name, choice of °F or °C scale, sample rate and high/low alarms.

The collected temperature data is transmitted via a WiFi network to a PC and viewed via the graphing tool. Data can also be exported to Excel.

During configuration, the data logger will search for an existing wireless network while physically connected to the PC. The data logger can then be placed anywhere within range of the network. If it temporarily loses connectivity with the network, the data logger will log readings until it is able to communicate again with the PC application (max 120 days at 10 second sample interval). The range of the data logger can be increased by using WiFi extenders.

This RF312-TP is a low powered battery device with a battery life of three months to one year, depending on transmission rate. The battery can be recharged via a PC or by mains power using the RF320/US power supply unit, which is available as an accessory.

Features

- Measurement range -40°F to +257°F (-40°C to +125°C)
- Rechargeable internal lithium polymer battery
- Easy data logger set-up using free PC software application (downloadable from www.comarkusa.com)
- Temperature selection in °F or °C
- Data can be viewed via the graphing tool or can be exported to Excel
- Configurable high and low alarms with indicator
- Max and Min readings
- View and analyze multiple data loggers using the PC application, including immediate graphing of historic data
- Memory stores all data even if WiFi is temporarily disconnected
- 802.11b compliant
- IP rating on main unit IP55, probe IP67
- Fully featured LCD segment display
- Low battery indicator
- WiFi connection indicator
- USB port used for recharging and initial Setup
- Supplied with removable thermistor probe with 1 metre length lead, wall bracket and micro USB lead



Probe included

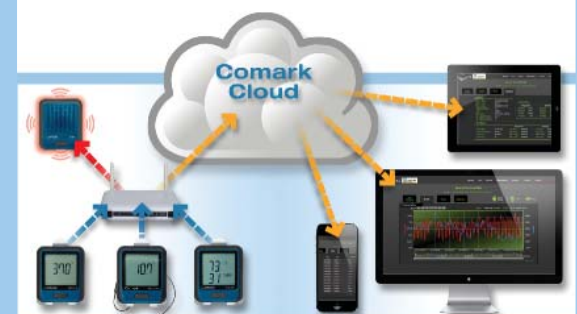
Comark Instruments' Cloud service makes your data universally accessible from any internet enabled device.

Manage your devices and make changes to any data logger settings remotely, including changing alarm levels.

With the Cloud service you can:

- Store data on-line
- Monitor multiple sites
- View on mobile devices
- Have multiple users
- Receive email alerts when alarms occur or if a device needs attention

Contact Comark Instruments for more details



Technical Specification

RF312-TP Temperature Data Logger with Probe





Specifications	Minimum	Typical	Maximum	Unit
Battery life	3		12	Months*
USB supply voltage	4.5v		5.5v	V d.c.
Probe Temperature measurement range	-40°F (-40°C)		+257°F (+125°C)	°F (°C)
Internal resolution		±0.1°		°F (°C)
Probe temperature accuracy +14 to +158°F (-10 to +70°C)		±1.1°F (0.6°C)		°F (°C)
Probe temperature accuracy -40 to +257°F (-40 to +125°C)		±1.8°F (1.0°C)		°F (°C)
Probe clip operating temperature range	-40°F (-40°C)		+212°F (+100°C)	°F (°C)
Logging rate (user configurable)	10 seconds	30 seconds	12 hours	Transmission rate
Transmission period (user configurable)	1 minute	1 hour	12 hours	
Operating temperature range	-4°F (-20°C)		+140°F (+60°C)	°F (°C)

* Depending on frequency of transmissions

Order Part Number: RF312-TP Oracle Part Number: 4365202

Logger Dimensions	Inches	mm
Height	4	97.3
Width	3	71.3
Depth	1	26.36

Probe Dimensions	Inches	mm
Length	1	25.0
Width	2	5.0
Lead length	36	1000

Optional Probes	
	RFX100J Air Probe with 1m lead
	RFX200J Air Probe with 2m lead
	RFPX100J Penetration Probe with 1m lead
	RFPX200J Penetration Probe with 2m lead

WARRANTY

All Comark instruments have a minimum one year warranty unless otherwise stated. The warranty period for temperature probes is for six months and all other probes and electrodes are unwarranted because the conditions of use are beyond our control. The Comark warranty covers manufacturing defects and component failures on all products returned to Comark premises and applies worldwide. The warranty does not affect your statutory rights. In line with our policy of continuous development we reserve the right to alter any product specifications without notice. All products are covered by our Quality Management System which is compliant with BS EN ISO 9001:2008 for the design, manufacture, supply, service, repair and recalibration of electronic measuring instruments and equipment.

Distributed by:



Elso Philips Service
Jilemnického 2; 911 01 Trenčín
tel: +421 32 6582410
fax: +421 32 6582592
email: elso@elso.sk
web: www.elso.sk

Comark Instruments

Beaverton, OR 97077, USA

Tel: (800) 555 6658

Fax: (503) 644 5859

Email: sales@comarkusa.com

www.comarkusa.com

C235/2/US © Comark Instruments



Click on www.comarkusa.com for more information