

**FLUKE®**

**Biomedical**

# Biomedical Test Product Catalog 2009/2010



ESA620 Electrical  
Safety Analyzer



ESA612 Electrical  
Safety Analyzer



Impulse 7000DP Defibrillator/  
Transcutaneous Pacemaker Analyzer



VT MOBILE  
Gas Flow Analyzer

riešenia na presné meranie™

Elso Philips Service, tel: +421 32 6582410  
email: [elso@elso.sk](mailto:elso@elso.sk); web: [www.elso.sk](http://www.elso.sk)

**Fluke Biomedical.**  
*Better products. More choices. One company.*

**2009/2010****Providing solutions, not just products**

Today, biomedics, physicists, RSO's, other medical personnel must meet increasing regulatory pressures, higher quality standards, and rapid technological growth, while performing their work faster and more efficiently than ever. Fluke Biomedical provides a diverse range of software and hardware tools to meet today's challenges.

**Service**

Fluke Biomedical is dedicated to providing the best service within the healthcare industry. Equipped with the best-credentialed facilities, onsite experts, and full asset-management capabilities, Fluke Biomedical's service team is always on call to take care of its customers. Fluke Biomedical's world-class staff leads the industry in post- and pre-sale support, including helping customers choose the best products and accessories for their needs, technical support, product calibration, and repairs.

**Regulatory compliance**

Fluke Biomedical's benchmark quality operates to the most rigorous standards in the industry, including compliance with ISO 9001:2000, ISO 13485:2003, FDA/QSR as applicable, and NRC/Part 50, Appendix B/Part 21 and adheres to ISO 17025:2005, ANSI Z540, Mammography MQSA and CNSC. Many of the Fluke Biomedical products are CE-marked and CSA-certified. In addition, the Global Calibration Laboratory holds its NVLAP Lab Code 200566-O certification and is traceable to both the NIST & PTB.

**Legacy**

You may be familiar with some of our legacy brand names, including:

- Victoreen®
- Nuclear Associates
- Keithley
- Metron
- DNI Nevada
- Bio-Tek Instruments

Fluke Biomedical has taken the best elements and products of these former brands and has incorporated them into the Fluke Biomedical culture and product line available today.

**Our newest catalog**

Our Biomedical Test catalog emphasizes the complete line of biomedical test and simulation products for Biomedical/Clinical Engineers and Technicians. The catalog contains information about Fluke Biomedical's test and simulation products, including standalone electrical safety testers, patient simulators, and performance analyzers, as well as fully integrated and automated performance-testing and documentation systems.

If you are interested in receiving catalogs or information about any of Fluke Biomedical's other product-lines, please visit [www.flukebiomedical.com/catalogs](http://www.flukebiomedical.com/catalogs).

**Catalogs are also available for the following product lines:**

- Radiation Safety
- Radiation Oncology QA
- Diagnostic Imaging QA
- Service

**About Fluke Biomedical**

Fluke Biomedical leads the world in the manufacture of biomedical test and simulation products, including standalone electrical safety testers to fully integrated and automated performance testing and documentation systems. Fluke Biomedical also provides some of the most trusted and accurate radiation safety, medical imaging, and oncology quality-assurance solutions for regulatory compliance.

**About Fluke Corporation**

Fluke Biomedical is a division of Fluke Corporation. Fluke Corporation is the world leader in the manufacture, distribution, and service of electronic test tools and software and is a wholly owned subsidiary of Danaher Corporation (NYSE:DHR).



# Biomedical Test Product Catalog

**FLUKE®****Biomedical**

## Contents

### Defibrillator/Transcutaneous Pacer Analyzers

Impulse 6000D/7000DP Defibrillator/Transcutaneous Pacemaker Analyzer .....	4
QED 6 Defibrillator Analyzer .....	8

### Pacemaker Analyzer

SigmaPace 1000 External Pacemaker Analyzer .....	10
--	----

### Electrosurgery Analyzers

QA-ES Series II Electrosurgery Analyzer .....	12
RF303 <sub>RS</sub> Electrosurgery Analyzer .....	14

### Infusion Device Analyzer

IDA 4 Plus Infusion Device Analyzer .....	16
---	----

### Electrical Safety Analyzers

ESA620 Electrical Safety Analyzer .....	18
ESA612 Electrical Safety Analyzer .....	20
ESA601 Electrical Safety Analyzer .....	22
601 Pro Series <sub>XL</sub> Electrical Safety Analyzer .....	24
QA-90 MKII Electrical Safety Analyzer .....	26
180 Electrical Safety Analyzer .....	28
175 Electrical Safety Analyzer .....	29
LT544DLITE Digital Safety Tester .....	30
LT544DPLUS Digital Safety Tester .....	31

### Ultrasound Transducer Leakage Tester

ULT800 Ultrasound Transducer Leakage Tester .....	32
---	----

### Non-Invasive Blood Pressure Simulator

BP Pump 2 Non-Invasive Blood Pressure Simulator .....	33
CuffLink Non-Invasive Blood Pressure Simulator .....	35

### Patient Simulators

MPS450 Patient Simulator .....	37
medSim 300B Patient Simulator .....	39
PS420 Patient Simulator .....	41
PS415 Patient Simulator .....	44
PS410 Patient Simulator .....	45
PS400 Patient Simulator .....	46
DataSim 6100 Patient Simulator .....	47

### Controller

HHC3 Hand Held Controller .....	48
---------------------------------	----

### Fetal Simulator

PS320 Fetal Simulator .....	49
-----------------------------	----

### Pulse Oximeter Simulator

Index 2 Patient Oximeter Simulator .....	51
--	----

### Gas Flow Analyzers

ACCU LUNG Portable Precision Test Lung .....	52
VT MOBILE Portable Gas Flow Analyzer .....	53
VT PLUS HF Gas Flow Analyzer .....	55

### Pressure Meters

DPM4 Parameter Tester .....	57
DPM1B Pneumatic Transducer Tester .....	59
DPM2Plus Pressure Tester .....	60

### Automation Solutions

Ansur Test Automation Software .....	61
medTester 5000C Automated Biomedical Equipment Test System .....	63

### Incubator Analyzer

INCU Incubator Analyzer .....	65
-------------------------------	----

### Oxygen Analyzer

maxO <sub>2</sub> PLUS AE Oxygen Analyzer .....	66
---	----

### Service and Calibration

Service and Calibration Info .....	67
------------------------------------	----

#### Fluke Biomedical

6045 Cochran Road  
Cleveland, OH 44139-3303 U.S.A.

#### Fluke Biomedical Europe

Science Park Eindhoven 5110  
5692EC Son, The Netherlands

#### For more information, contact us

In the U.S.A. (800) 850-4608 or  
Fax (440) 349-2307  
In Europe/M-East/Africa  
+31 40 267 5435 or  
Fax +31 40 267 5436  
From other countries  
+1 (440) 248-9300 or  
Fax +1 (440) 349-2307  
Email:

sales@flukebiomedical.com

Web access:

www.flukebiomedical.com

#### Service Center/Repair/ Calibration US

Fluke Biomedical  
6045 Cochran Road  
Cleveland OH 44139-3303  
Tel: 440-498-2560  
Toll free: 800-850-4608 ext 2564  
Email:  
globalcal@flukebiomedical.com

#### Service Center/Repair/ Calibration Europe

Fluke Biomedical Europe  
Science Park Eindhoven 5110  
5692EC Son, The Netherlands  
Tel: +31 (40) 267 5435  
Fax: +31 (40) 267 5436  
Email: servicedesk@fluke.nl

# Impulse 6000D/7000DP

## Defibrillator/Transcutaneous Pacemaker Analyzer



The Impulse 6000D Defibrillator Analyzer and Impulse 7000DP Defibrillator/Transcutaneous Pacemaker Analyzer Test Systems are rugged, portable precision test instruments that ensure proper operation and ultimate performance of critical life-support cardiac-resuscitation equipment. The Impulse 6000D and Impulse 7000DP test capabilities encompass the spectrum

of worldwide-established pulse shapes, showcase breakthrough AED technology compatibility, and outperform in accuracy and standards. Additionally, the Impulse 7000DP incorporates the tests and the extensive range of test loads and measurement algorithms needed to test external transcutaneous pacemakers.

In conjunction with an Impulse 7000DP, the Impulse 7010 Defibrillator Selectable Load Accessory provides multiple loads of 25  $\Omega$ , 50  $\Omega$ , 75  $\Omega$ , 100  $\Omega$ , 125  $\Omega$ , 150  $\Omega$ , 175  $\Omega$ , and 200  $\Omega$  for defibrillator performance testing. A standard USB interface enables computer control and data transfer, and optional Ansur PC-based automation software increases productivity by outfitting users with an easy-to-use method to standardize testing procedures and capture, print and document data.



### Key features

- Impulse 7010 Defibrillator Selectable Load Accessory provides multiple loads of 25  $\Omega$ , 50  $\Omega$ , 75  $\Omega$ , 100  $\Omega$ , 125  $\Omega$ , 150  $\Omega$ , 175  $\Omega$ , and 200  $\Omega$  to comply with IEC 60601-2-4 standard (optional)
- Lown, Edmark, trapezoidal, biphasic and pulsed biphasic defibrillation technology compatibility
- AED technology compatibility
- First-class measurement accuracy:  $\pm 1\%$  of reading 0.1 J
- Intuitive user interface and backlight, easy-to-ready display
- Portable, rugged, easy to carry
- Long-lasting, rechargeable battery
- Internal pacer brand selections
- Pacer input protected against defibrillator output (7000DP only)
- 10 isolated ECG electrodes that provide 12 combinations for standardized clinical signals
- Flexible heart-rate settings (1 BPM step) facilitate rate meter accuracy and alarm testing
- DSP-based measurements enable future firmware and waveforms upgrade
- Unique integrated posts for secure connections
- Optional Ansur test automation software to standardize testing procedures, capture waveforms, and print and document test result

### Product comparison chart

Model	QED 6	Impulse 6000D	Impulse 7000DP
Monophasic and dc biphasic energy capability	Yes	Yes	Yes
Pulsed biphasic engery capability	No	Yes	Yes
Defibrillator tests	Output energy	Output energy	Output energy
	Cardioversion	Cardioversion	Cardioversion
	Peak measurements	Max energy/charge-time overshoot	Max energy/charge-time overshoot
	—	Peak and average current	Peak and average current
	—	Voltage measurement	Voltage measurement
Normal ECG/performance waves	No	Yes	Yes
Transcutaneous pacer tests	No	No	Yes



# Impulse 6000D/7000DP

## Defibrillator/Transcutaneous Pacemaker Analyzer

### Specifications

#### Defibrillator Analyzer

Energy output measurement	Compatible defibrillator waveshapes: Lown, Edmark, trapezoidal, dc bi-phasic, and ac pulsed bi-phasic
Autoranged measurement	0.1 J to 600 J
Accuracy	0.1 J to 360 J: $\pm 1\%$ of reading +0.1 J 360 J to 600 J: $\pm 1\%$ of reading +0.1 J, typical Note: For pulsed bi-phasic defibrillator, specified accuracy is $\pm (1.5\% \text{ of reading} + 0.3 \text{ J})$ on both ranges
Load resistance	Resistance: 50 $\Omega$
Accuracy	1 %, non-inductive ( $< 2 \mu\text{H}$ )
Charge time measurement	Range: 0.1 s to 100 s Accuracy: $\pm 0.05$ s, typical
Synchronization test (cardioversion)	<b>Delay time measurement</b> <ul style="list-style-type: none"> <li>Timing window: ECG R-wave peak to the defib pulse peak</li> <li>Range: -120 ms to 380 ms; measures timing from 120 ms prior to the R-wave peak to up to 380 ms following the R-wave peak</li> </ul> <b>Automated defibrillator test ECG waves</b> <ul style="list-style-type: none"> <li>Normal sinus: 10 BPM to 300 BPM in 1 BPM steps</li> <li>Ventricular fibrillation: Coarse and fine</li> <li>Monomorphic ventricular tachycardia: 120 BPM to 300 BPM in 1 BPM steps</li> <li>Polymorphic ventricular tachycardia: 5 types</li> <li>Asystole</li> </ul>
<b>ECG waves</b>	
ECG general	Lead configuration: 12-lead simulation; RA, LL, LA, RL, V1-6 with independent outputs
Lead to lead impedance	1000 $\Omega$
Rate accuracy	$\pm 1\%$ nominal
ECG amplitudes	Reference lead: Lead II (default) or Lead I Settings: 0.05 mV to 0.45 mV by 0.05 mV and 0.5 mV to 5 mV by 0.05 mV Accuracy: $\pm 2\%$ of setting (Lead II), $\pm 5\%$ for all other leads and defib paddles
ECG normal sinus	Rates: 10 BPM to 360 BPM in 1 BPM steps
ECG on defibrillator input load	Same as the Lead II amplitude but limited to $\pm 4$ mV
ECG performance waves	Square wave: 2 Hz and 0.125 Hz Triangular wave: 2 Hz and 2.5 Hz Sine waves: 0.05 Hz, 0.5 Hz, 5 Hz, 10 Hz, 40 Hz, 50 Hz, 60 Hz, 100 Hz, 150 Hz, and 200 Hz Pulse: 30 BPM and 60 BPM, 60 ms pulse width
R-wave detection	Waveform: Haver-triangle Rate: 30 BPM, 60 BPM, 80 BPM, 120 BPM, 200 BPM, and 250 BPM Widths: 8 ms, 10 ms, 12 ms, and 20 ms to 200 ms in 10 ms steps Accuracy: $\pm 1\%$ setting 0.2 mV
Noise immunity	Wave sine Line frequency: 50 Hz or 60 Hz ( $\pm 0.5$ Hz) Amplitude: 0 mV to 10 mV (by 0.5 mV $\pm 5\%$ )
Arrhythmia selections	Pacer interactive (Impulse 7000DP only) Supraventricular Premature Ventricular Conduction Transvenous paced with selectable pacer spike amplitudes and widths



# Impulse 6000D/7000DP

## Defibrillator/Transcutaneous Pacemaker Analyzer

### Specifications

#### Transcutaneous Pacemaker Analyzer (Impulse 7000DP only)

<b>Defibrillator input</b>	Fixed load: 50 $\Omega$ Accuracy: $\pm 1\%$ , non-inductive ( $< 2\ \mu\text{H}$ )
<b>Pacemaker input</b>	Variable load: 50 $\Omega$ to 1500 $\Omega$ by 50 $\Omega$ Accuracy: $\pm 1\%$ , non-inductive ( $< 2\ \mu\text{H}$ )
<b>Manufacturer specific algorithms</b>	<ul style="list-style-type: none"> <li>• Medtronic/Physio Control LIFEPAK</li> <li>• Philips/Agilent/HP</li> <li>• ZOLL Medical</li> <li>• GE Responder (1500 and 1700)</li> <li>• MRL/Welch Allyn</li> <li>• Schiller Medical</li> <li>• MDE300 (Medical Data Electronics), plus a general purpose default algorithm selection</li> </ul>
<b>Current</b>	Range: 4 mA to 250 mA Accuracy: $\pm 1\%$ of reading +0.02 mA
<b>Pulse rate</b>	Range: 5 PPM to 800 PPM Accuracy: $\pm 0.5\%$ of reading +0.1 PPM
<b>Pulse width</b>	Range: 1 ms to 100 ms Accuracy: $\pm 0.5\%$ of reading +0.01 ms
<b>Demand and asynchronous mode test</b>	Underdrive rate: 10 BPM minimum Overdrive rate: 300 BPM maximum
<b>Sensitivity test</b>	<b>Automatic interactive threshold detection</b>
	Compatible pacer rates: 30 PPM to 120 PPM
	<b>ECG R wave</b>
	Waveforms: Square, triangle, sine
	Widths: 1 ms to 19 ms (by 1 ms), 20 ms to 95 ms (by 5 ms), 100 ms to 300 ms (by 25 ms)
	Accuracy: $\pm 5\%$ of setting
	Amplitude: 0.05 mV to 0.95 mV (by 0.05 mV), 1 mV to 5 mV (by 0.5 mV)
<b>Refractory period tests</b>	Accuracy: $\pm 5\%$ of setting
	Paced refractory period 20 ms to 500 ms
	Sensed refractory period 15 ms to 500 ms Accuracy: $\pm 1\text{ ms}$

#### General information

<b>Dimensions (LxWxH)</b>	32 cm x 24 cm x 13 cm (13 in x 9.5 in x 5 in)
<b>Weight</b>	3.02 kg (6.6 lb)

#### Standards

<b>Safety standards</b>	CE: IEC/EN61010-1 2nd Edition; Pollution degree 2; CSA: CAN/CSA-C22.2 NO,61010-1, UL61010-1; C-Tick: Australian EMC
-------------------------	---

### Optional accessories

**3091370** Ansur Impulse 6000D/7000DP Plug-In  
**3065489** MedtronicERS/Physio-Control (FAST PATCH) (set of two): 4 mm defibrillator adapters  
**3065450** Kimberly Clark/R2 Darox MRL/MDE/NK: 4 mm defibrillator adapters  
**3065438** Internal discharge paddle contacts (set of two)  
**3065477** Medtronic ERS/Physio-Control (QUIK PACE) (set of two): 4 mm pacer adapters  
**3065527** Zoll Medical NTP/PD1400: 4 mm pacer adapters  
**3065461** Medtronic ERS/Physio-Control (QUIK COMBO): 4 mm defib/pacer adapters  
**3065492** Philips/Agilent/HP (CODEMASTER Series-Round): 4 mm defib/pacer adapters  
**3065509** Philips/Agilent HEARTSTART FR2/MRX: 4 mm defib/pacer adapters  
**3065511** Zoll PD-2200 Multi-Function PD-Series, M-Series, M-Series CCT, AED PRO® and AED Plus™ defib/pacer adapters  
**3065423** GE Marquette (RESPONDER 1500/1700 Series) (set of two): 4 mm defib/pacer adapters  
**3158544** Impulse 7010 Defibrillator Selectable Load Accessory

# Impulse 6000D/7000DP

## Defibrillator/Transcutaneous Pacemaker Analyzer

### Specifications

#### Impulse 7010 Defibrillator Selectable Load Accessory

Maximum voltage	5000 V
Maximum continuous power	12 W, equivalent to 10 defib pulses of 360 J every 5 minutes
Inductance	< 2 $\mu$ H, @25 $\Omega$ < 3 $\mu$ H, @50 $\Omega$ < 4 $\mu$ H, @75 $\Omega$ and 100 $\Omega$ < 5 $\mu$ H, @125 $\Omega$ < 6 $\mu$ H, @150 $\Omega$ < 7 $\mu$ H, @175 $\Omega$ < 8 $\mu$ H, @200 $\Omega$
Temperature	Operating: 10 °C to 40 °C (50 °F to 104 °F) Storage: -20 °C to 60 °C (-4 °F to 140 °F)
Humidity	10 % to 90 % non-condensing
Dimensions (WxDxH)	154 mm x 272 mm x 138.7 mm (6.07 in x 10.71 in x 5.46 in)
Weight (net)	1.54 kg (3 lb 6.2 oz)
Safety class	Complies with EN61010-1 2nd Edition, Class II product
Safety standards	CE: IEC/EN61010-1 2nd Edition; Pollution degree 2; CSA: CAN/CSA-C22.2 NO.61010-1, UL61010-1; C-Tick: Australian EMC
Warranty	Two-year extended warranty (no-cost extended warranty available after first-year calibration at any Fluke Biomedical authorized service center)
Calibration interval	One-year
<b>Electrical specifications (for load accessory and analyzer together)</b>	
Load settings	25 $\Omega$ , 50 $\Omega$ , 75 $\Omega$ , 100 $\Omega$ , 125 $\Omega$ , 150 $\Omega$ , 175 $\Omega$ , and 200 $\Omega \pm 1$ %
Accuracy	Energy (all except pulsed biphasic): 2 % of reading + 0.1 J with 25 $\Omega$ , 75 $\Omega$ though 200 $\Omega$ loads, 1 % of reading + 0.1 J with 50 $\Omega$ load Energy (pulsed biphasic): 2.5 % of reading + 0.3 J with 25 $\Omega$ , 75 $\Omega$ though 200 $\Omega$ loads, 1.5 % of reading + 0.3 J with 50 $\Omega$ load Voltage: 1 % of reading + 2 V with 25 $\Omega$ and 50 $\Omega$ loads, 2 % of reading + 2 V with 75 $\Omega$ through 200 $\Omega$ loads Current: 2 % of reading + 0.1 A with 25 $\Omega$ load, 1 % of reading + 0.1 A with 50 $\Omega$ through 200 $\Omega$ loads



N10140

#### Included accessories

3028681 Users Manual CD  
3028662 Getting Started Guide  
XXXXXXX Battery Eliminator (country specific)  
2814980 Carrying Case  
2795773 Defibrillator Paddle Contact Plates  
1626219 USB Computer Communication Cable

#### Ordering information

##### Impulse 6000D Defibrillator Analyzer


2811928 United States, 120 V  
3077031 Schuko  
3077046 United Kingdom  
3077054 Japan  
3085270 Australia  
3085281 India

##### Impulse 7000DP Defibrillator/Transcutaneous Pacemaker Analyzer


2811919 United States, 120 V  
3077005 Schuko  
3077010 United Kingdom  
3077022 Japan  
3085296 Australia  
3085308 India

##### Impulse 7000DP Defibrillator/Transcutaneous Pacemaker Analyzer with test automation

3326874 United States, 120 V  
3326888 Schuko  
3326895 United Kingdom  
3326901 Japan  
3326912 Australia  
3326920 India

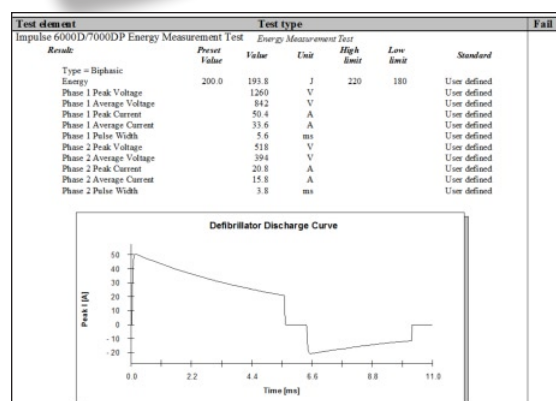

Discharge curve at 25 Ohms using Ansur and the 7010 load box.

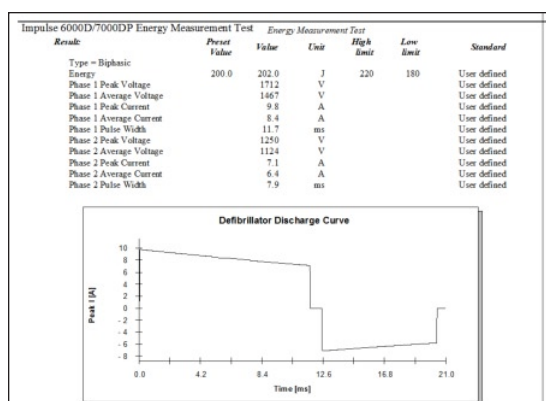

Discharge curve at 175 Ohms using Ansur and the 7010 load box.

Note the differences in the shape, the peak currents and the time of the discharges.



# QED 6

## Defibrillator Analyzer



The QED 6 provides a scalable solution to accurately test defibrillators. Lightweight and portable, the QED 6 measures a wide range of defibrillator energy output parameters.

An RS-232 serial port supports remote computer control and test documentation.

### Key features

- Defibrillator analyzer
- Monophasic and biphasic dc energy measurement
- Energy and cardioversion measurement
- Peak voltage, peak current, and overshoot measurement
- 2-line x 24-character display
- Bidirectional RS-232 port for computer control
- Storage and playback of output waveform so results can be viewed in greater detail
- Optional Ansur test automation software to standardize testing procedures, capture waveforms and test results, and print and document test results



## Specifications

Output energy test	
Load	50 ± 1 %, with inductance < 70 µh
Resolution	High-range: 1 J Low-range: 0.1 J
Low-range	0 J to 100 J
High-range	0 J to 1000 J
Pulse width	1 ms to 50 ms
Maximum current	Low: 35 A High: 110 A
Maximum voltage	Low: 1750 V High: 5500 V
Minimum voltage	Low: 20 V High: 66 V
Accuracy	1000 J range: ± 2 % of reading 100 J to 1000 J: ± 2 J 100 J Range: ± 2 % of reading, ± 0.1 J
Waveform storage	Discharge viewable via ECG output, paddles, and scope output
Time expansion lead II amplitude	High = 3000 V / mV Low = 900 V / mV
Peak/overshoot	
Voltage accuracy	1000 J range: ± 10 V 100 J Range: ± 25 V Current accuracy: ± 1 A
Cardioversion synchronization test	Measurement from peak or base of simulated R-wave: 0 ms to 199.9 ms Accuracy: 1 % of full scale or ± 2 ms, whichever is greater



# QED 6

## Defibrillator Analyzer

<b>Defib waveform playback</b>	
<b>Time base expansion</b>	100:1 @ 25 mm/s paper speed, each division equals 40 ms
<b>Amplitude scaling</b>	Lead II (RA-LL) 1000 J range: 1 mV = 3000 V 100 J range: 1 mV = 900 V
<b>ECG output</b>	1000 J range: 0.5 V = 3000 V 100 J range: 0.5 V = 900 V
<b>Scope outputs</b>	
<b>ECG hi-level</b>	Fixed at 1 V
<b>Accuracy</b>	± 2 %
<b>Defib output</b>	Real time
<b>Waveform output</b>	5 ECG lead adapters, front-panel paddles, and high-level scope output
<b>Calibration screen</b>	
<b>Load</b>	50 ± 1% (Apex-Sternum)
<b>Amplitude scaling</b>	Apex (+) to sternum (-)
<b>Zero voltage input</b>	0 ± 2 counts
<b>RS-232 output/computer control</b>	Computer control allows the user to operate the QED 6 remotely via a serial RS-232 interface. It requires an RS-232 cable and a bidirectional D-9 connector.
<b>Selectable communications parameters</b>	
<b>Baud rate</b>	300, 600, 1200, 2400, and 9600
<b>Parity</b>	None, even, odd
<b>Stop bits</b>	1 or 2
<b>Data bits</b>	7 or 8
<b>Environmental requirements</b>	
<b>Storage temperature</b>	-25 °C to 50 °C (-13 °F to 122 °F)
<b>Operating temperature</b>	0 °C to 40 °C (32 °F to 104 °F)
<b>Maximum humidity</b>	90 % relative humidity
<b>General information</b>	
<b>Display</b>	2-line x 24-character super twist LCD
<b>Power</b>	One 9 V alkaline battery or 9 V battery eliminator; 12 hours continuous operation; low-battery indication; 120/240 V battery eliminator input
<b>Dimensions (WxDxH)</b>	24.13 cm x 26.67 cm x 10.16 cm (9.5 in x 10.5 in x 4 in)
<b>Weight</b>	2.06 kg (4.54 lb)

### Optional accessories

**2817226** Ansur QED 6 Plug-in  
**2204282** Carrying Case  
**2204472** RS-232/Printer Cable  
**2248899** Serial/Parallel Printer  
**2720054** 9 V dc Adapter

### Included accessories

**2204510** Operator's Manual  
**2204198** Internal Paddle Adapters

### Ordering information

**2251457** QED 6 Defibrillator Analyzer

# SigmaPace™ 1000

## External Pacemaker Analyzer



Fluke Biomedical's premier SigmaPace 1000 analyzes both transvenous and transcutaneous external pacemakers and comes loaded with features to save time and money. This powerful handheld tool conducts the full suite of tests specified by major pacemaker manufacturers in less than half the time it would take using originally prescribed testing methods.

Output data is displayed on three selectable screens for easy viewing, including an AV delay time readout providing a performance snapshot for both pacer channels.

With capability for long-term trend testing, the SigmaPace

1000 can interrogate a pacer for up to 11 days, capturing data pulse by pulse to detect intermittent and hard-to-find problems.

For maximum efficiency, the SigmaPace 1000 doubles as a training tool. Interactive ECG simulation lets users test patient monitoring equipment as well as teach nurses how to operate the pacemaker.

### Key features

- Transcutaneous and transvenous external pacemaker tests
- Pulse-output tests (rate, current, volts, energy, pulse width, and AV interval)
- Amplitude sensitivity and refractory tests
- Demand and asynchronous-mode tests
- DC load current test
- Output-leakage tests
- Line-frequency noise-rejection tests
- Wide range of test loads, from 50  $\Omega$  to 1500  $\Omega$ , specified by manufacturer for transcutaneous pacers
- Full range of IEC specified test loads for transvenous pacers 200  $\Omega$ , 500  $\Omega$ , and 1000  $\Omega$
- Pacer output displayed on three different screens
- AV readout showing both pacer channels on one screen
- Long-term trend test to detect intermittent errors and hard-to-find problems
- Interactive ECG pacer simulation with 5-lead output for patient monitor evaluation and pacer operation training
- 8-line x 21-character display

## Specifications

ECG disposable snap electrode adapters	3.2 mm and 4 mm
Modes of operation	Manual, remote
Transcutaneous pacer tests	<b>Pulse output test</b> Current: 4 mA to 250 mA Rate: 5 PPM to 300 PPM Width: 1 ms to 99.9 ms Energy: 1 $\mu$ J to 1.99J
	Demand model test
	Async mode test
	Amplitude sensitivity test
	Noise immunity test
	Paced refractory period test
	Sensed refractory period test
	Internal test loads: 31 selections: 50 $\Omega$ to 1550 $\Omega$



SigmaPace 1000 standard accessories



# SigmaPace™ 1000

## External Pacemaker Analyzer

### Specifications

<b>Transvenous pacer tests</b>	<b>Pulse output test</b> Display output test: (3) single (A or V) and dual (A+V) Current: 0.05 mA to 30 mA Rate: 10 PPM to 999 PPM Width: 0.02 ms to 9.99 ms Voltage: 0.05 V peak to 30 V peak Energy: 1 nJ to 999 µJ
	Demand model test
	Async mode test
	Amplitude sensitivity test
	Noise immunity test
	Paced refractory period test
	Sensed refractory period test
	AV delay time test
	DC leakage current test
	Measurement of dc offset on the pacemaker output
	Test types: Static/continuous and dynamic/sync'd with output
	Inputs/test loads: (3) 500 Ω
	DC current range: 0.1 mA to 99.9 mA
	Battery load current test Load current drawn by the pacemaker: 99.9 mA max
	Default: Derived from device manufacturer(s)
	<b>Transvenous measurement algorithm</b>
	<b>Available internal test loads</b> Ventricular and atrial channels: 200 Ω, 500 Ω, and 1000 Ω Default selection: 500 Ω (both A and V channels)
	<b>Long-term trend test</b> Tests the fundamental stability of the pacer output Total pulse count: 999,999 (max) Elapsed time: 999:59:59 (max) Maximum error count: 200 pulses Test limits: Selectable rate and output percentages
	<b>Interactive pacer ECG simulation</b> Simulates dynamic patient ECG activity in response to pacer output: Interactive NSR heart rate: 0 BPM to 25 BPM NSR PR interval: 0.05 s to 0.399 s Transvenous threshold: 1 mA to 25 mA Transcutaneous threshold: 10 mA to 250 mA
<b>Serial port</b>	Type: RS-232 Baud rate: 2400, 9600, and 192000
<b>Power</b>	Internal lithium ion battery pack (rechargeable) Battery operation: 20 hours (minute) Universal/external ac-to-dc power supply
<b>Dimensions (WxDxH)</b>	10.1 cm 20.3 cm x 5 cm (4 in x 8 in x 2 in)
<b>Weight</b>	0.9 kg (2 lb)

### Optional accessories

**2245006** Electrode adapters (including the brand/model-specific interface connector and a pair of 4 mm "safety-type banana plugs)

**2201109** Aligent (HP) CodeMaster Series

**2201111** GE Marquette Medical

**2201127** Medical Data Electronics (MDE); Medical Research Laboratories (MRL)

**2201095** Medtronic Physio-Control Quick Combo

**2201088** Medtronic Physio-Control Quick Pace

**2201323** Philips/Agilent Codemaster Series

**2201130** Zoll Medical NTP Series

**2201148** Zoll Medical PD Series and M Series

**2200102** Interface Cable (RS-232; female DB9 to female DB25; medTester to SigmaPace™ 1000/PC/Index 2XL/IDA 4 Plus; Impulse 4000 to PC)

**2201419** Detachable cord set—Japan (IEC 320 C6 type 3-pin inlet)

**2201437** Detachable cord set—Schuko—Euro (IEC 320 C6 type 3-pin inlet)

**2201428** Detachable cord set—UKI (IEC 320 C6 type 3-pin inlet)

**2201455** Detachable cord set—USA (IEC 320 C6 type 3-pin inlet)

**2201443** Detachable cord set—Australia (IEC 320 C6 type 3-pin inlet)

### Included accessories

**2243306** Users Manual

**2392906** Soft-sided Vinyl Carrying Case

**2201166** Transvenous Pacer Test Leads (2 sets, red)

**2201153** Transvenous Pacer Test Leads (2 sets, black)

**2392272** SigmaPace 9 V dc Load Test Cable

**2392260** Serial PC Interface Cable

**2184298** Universal-input Battery Charger

**2198724** Power cord set USA 120 V ac

### Ordering information

**SigmaPace 1000 External Pacemaker Analyzer**

**2247700** United States, 120 V

**2394548** Japan, 100 V

**2394553** Schuko, 250 V

**2394566** United Kingdom, 250 V

# QA-ES Series II

## Electrosurgery Analyzer



QA-ES Series II analyzes electrosurgical units quickly and accurately.

A wide load-resistance range provides 128 user-selectable loads, including very low loads for testing many of today's ESUs.

An accuracy of  $\pm 2\%$  of reading down to 20 mA guarantees reliable high-frequency leakage results. With capability to run an automatic-power-distribution test in as little as 1 minute, the QA-ES works fast so technicians save time.

An Ansur QA-ES software plug-in allows users to create and automatically run tests, capture data, and produce easy-to-read reports with a PC.

### Key features

- Automatic power distribution measurement, including power, current, peak-to-peak voltage (closed load only), and crest factor
- Oscilloscope output
- High-frequency leakage measurements with accuracy of  $\pm 2\%$  of reading
- 128 internal user-selectable test loads from  $10\ \Omega$  to  $5200\ \Omega$
- Foot-switch output for triggering the ESU under test
- Ansur QA-ES software plug-in for automated test protocols
- Large display
- RS-232 and Centronic-Printer interface

## Specifications

Modes of operation	
Continuous operation	Continuous measurement of power, current, peak-to-peak voltage (closed load only), and crest factor
Single operation	Single measurement after the set delay time of the ESU output of power, current, peak-to-peak voltage (closed load only), and crest factor
Power distribution	Automatic measurement of power, current, peak-to-peak voltage (closed load only), and crest factor through a user-selectable load range
RF leakage current	Provides connections and load configurations to measure HF leakage from both grounded and isolated equipment
RECQM	Test the "return electrode control quality monitoring" using the QA-ES internal loads
Manual/remote	via Ansur test automation software




# QA-ES Series II

## Electrosurgery Analyzer

### Specifications

Generator output	
Load resistance (128 loads)	10 $\Omega$ to 2500 $\Omega$ in step of 25 $\Omega$ 2500 $\Omega$ to 5200 $\Omega$ in step of 100 $\Omega$
Measurement	True-rms value of applied waveform
RMS bandwidth	30 Hz to 10 MHz (-3 dB) for instrumentation only 30 Hz to 2.5 MHz (-3 dB) with loads
Low frequency filter	100 Hz filter to avoid low-frequency disturbance or interference
Current	20 mA to 2200 mA
Current accuracy	$\pm 2\%$ of reading
Additional fixed load	200 $\Omega$ 400 W for 30 s; max 15 % duty cycle
Crest factor	The higher of the two peak voltage measurements is used for computation Range: 1.4 to 16 (V peak/V rms).
Foot-switch output	The foot switch output can be used to trigger the electrosurgical unit.
Peak-to-peak voltage	0 kV to 10 kV (closed load only) accuracy: $\pm 10\%$ <b>Note:</b> Measurement is taken between the active and dispersive electrodes with closed load only.
Oscilloscope output	5 V/A uncalibrated, 100 mA RF current minimum input
Ansurs QA-ES plug-in remote control	All functions and tests in QA-ES may be performed from the PC User-programmable test sequences Allows unlimited numbers of test sequences with user-programmable templates and test limits. These tests include power distribution test, output test, HF leakage, and RECQM verification.
Storage and recall	Protocol formats and data may be stored, recalled, printed out, or transferred.
General information	
Display	LCD graphic display Alphanumeric format 8 lines x 40 characters Graphic mode 240 x 64 pixel matrix
Display control	Five f-keys, enter, cancel, control knob, and an encoder
Data input/outputs	Parallel printer port and bidirectional RS-232
Power	115/230 V ac; 48 Hz to 66 Hz, 35 VA
Housing	Metal case
Dimensions (LxWxH)	39.5 cm x 34.2 cm x 13.2 cm (15.6 in x 13.5 in x 5.2 in)
Weight	9.8 kg (21.6 lb)

Test element		Test type		Fail	
LOW Power Distribution Curve (Optional)		Power distribution test			
Test Conditions	Results	Power	High Limit	CF	Current
Power	Load	Low Limit			Vp-p
150 W	100 Ohms	130	166.0W	1.6	1276.0mA
290 W	200 Ohms	270	277.0W	1.6	1164.0mA
290 W	300 Ohms	270	280.0W	1.6	960.0mA
265 W	400 Ohms	245	268.0W	1.5	821.0mA
240 W	500 Ohms	220	226.0W	1.6	673.0mA
215 W	600 Ohms	195	196.0W	1.6	572.0mA
180 W	700 Ohms	160	168.0W	1.6	490.0mA
170 W	800 Ohms	150	155.0W	1.6	444.0mA
120 W	1000 Ohms	100	127.0W	1.6	359.0mA
110 W	1200 Ohms	90	108.0W	1.6	302.0mA
95 W	1400 Ohms	75	94.0W	1.6	260.0mA
80 W	1600 Ohms	60	84.0W	1.6	227.0mA
70 W	1800 Ohms	50	74.0W	1.6	201.0mA
60 W	2000 Ohms	40	67.0W	1.6	182.0mA

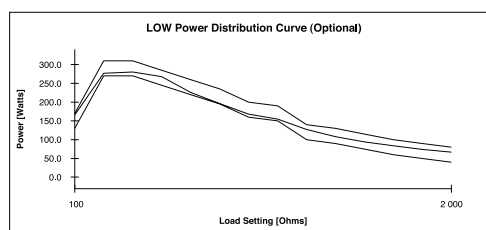

Example of a power distribution curve created in 30 seconds with the Ansurs QA-ES plug-in.

### Optional accessories

- 2461794** Carrying Case
- 2461802** Ansurs Test Software, QA-ES plug-in license
- 2461993** Data Transfer Cable, RS-232
- 2716059** QA-ES II Calibration Manual
- 2523266** Clamp, crocodile style, grip C, black
- 2523275** Clamp, crocodile style, grip C, red

### Included accessories

- 2716044** QA-ES Series II Users Manual (electronic, CD)
- 2716032** QA-ES Series II Users Manual (printed)
- 2772171** ESU-Dispersive Safety Lead
- 2772180** ESU-CQM Safety Lead
- 2772209** ESU-Jumper Safety Lead
- 2826194** Test Lead with stackable plugs
- 1903307** Test Lead Set with retractable sheaths
- 1610159** Sure-Grip Large Alligator Clip Set
- XXXXXXX** Power Cord (country specific)

### Ordering information

#### QA-ES Series II

#### Electrosurgery Analyzer

- 2649769** United States, 115 V
- 2651725** Schuko, 230 V
- 2770445** United Kingdom, 230 V
- 2770450** Australia, 230 V
- 3096390** Japan, 100 V
- 3319736** QA-ES, US 115V w/Test Automation
- 3319749** QA-ES, SHK 230V w/Test Automation
- 3319751** QA-ES, UK 230V w/Test Automation
- 3319760** QA-ES, AUS 230V w/Test Automation
- 3319772** QA-ES, JPN 100V w/Test Automation

# RF303<sub>RS</sub>

## Electrosurgery Analyzer



RF303<sub>RS</sub> Electrosurgery Analyzer provides enough user-selectable test loads to do routine maintenance checks on most electrosurgery units on the market today. Compact and portable, the device is so simple to use that technicians can become proficient with the RF303<sub>RS</sub> within minutes.

The unit measures ESU output and high-frequency leakage, allows for verification tests on the return electrode contact quality monitors, and has an

oscilloscope output for waveform viewing. Instantaneous output or selectable sample times provide extra versatility. The instantaneous mode is sufficient for most units, but if output readings are variable and require stabilizing, the signal-averaging mode allows users to manually select two additional, slower sampling times to produce an accurate average reading.



### Key features

- Easy to use simple configuration
- Oscilloscope output, high-frequency leakage, and return electrode contact quality monitor tests
- Instantaneous and signal-averaging measurement mode
- Ability to connect with Fluke Biomedical's medTester 5000C for automated solution
- RS-232 port for computer control
- Battery powered
- 4-digit numeric LCD with backlight and power-save mode

## Specifications

<b>Modes of operation</b>	Line powered, battery powered, offline (battery maintenance charge)
<b>Test parameters</b>	Power (W), HF current (mA), test load ( $\Omega$ )
<b>Tests performed generator output</b>	HF leakage (performs to IEC 601 2-2, 1289-2, ANSI/AAMI standards)
	Type BF test 1: Earth-referenced monopolar output
	Type BF test 2: Earth-referenced monopolar output
	Type CF/bipolar: Isolated monopolar or bipolar output
<b>Current measurement (leakage)</b>	Range: 30 mA to 2500 mA rms Resolution: 1 mA Accuracy: $\pm 2.5\%$ of reading or $\pm 15$ mA (whichever is greater)
<b>Power measurement (output)</b>	Range: 1 W to 400 W Resolution: 0.1 W Accuracy: $\pm 5\%$ of reading or $\pm 3$ W (whichever is greater)
<b>Bandwidth of rms converter circuit (1 % accuracy)</b>	Flat response: 10 kHz to 10 MHz -3 dB points: 1 kHz to 20 MHz
<b>Frequency response</b>	System response: -3 dB points, 1 kHz to 10 MHz at 300 $\Omega$
<b>RECQM test</b>	50 $\Omega$ to 750 $\Omega$ , 50 $\Omega$ steps
<b>Test load section</b>	Number of selections: 15
	Range: 50 $\Omega$ to 750 $\Omega$
	Step size: 50 $\Omega$
	Accuracy (dc to 500 KHz): $\pm 4\%$ of selected value measured at calibration to $\pm 1\%$ (across the entire operating temperature range)
	Duty cycle: 50 % @ 400 W (max 30 sec ON during any 1 minute period)
	Resonance impedance variation: $\pm 0.5$ dB max (< 10 MHz)
<b>Auxiliary leakage test load</b>	Fixed: 200 $\Omega$ Accuracy: $\pm 4\%$ Power rating: 225 W
<b>Input capacitance (nominal)</b>	Active to dispersive: 30 pF Active or dispersive to earth ground: 40 pF
<b>Oscilloscope output</b>	Transformer coupled output, uncalibrated Connector type: BNC

# RF303<sub>RS</sub>

## Electrosurgery Analyzer

### Specifications

<b>Battery</b>	Type: Sealed lead-acid
	Time between recharge: Two hours (continuous use)
	Time to full charge: Eight hours
	Number of cycles: 200
	Capacity: 2.2 A H
	Field serviceable: No
	Recharging: Internal, automatic charger; power cord required
<b>Front-panel controls/push buttons</b>	Measurement select (1)
	Load select: Increment test load (+) one step; decrement test load (-) one step
<b>Top-panel input connections</b>	<b>Designations:</b>
	• Generator output-active (1)
	• Generator output-dispersive (2)
	• Signal earth/ground reference (2)
	• Auxiliary HF leakage load (2)
	Connector type: 4 mm (0.16 in) diameter safety sockets
	Input voltage limit: 10,000 V peak
	Input current limit: 3 A rms
	Installation category: II
<b>Side input connection</b>	Designation: Signal reference
<b>Power requirements</b>	Universal input switching supply (12 V dc output)
	<b>Operating voltages:</b>
	• Specified: 115 V ac/230 V ac • Max Range: 83 V ac to 264 V ac
	<b>Operating frequencies:</b>
	• Specified: 50 Hz/60 Hz
	• Max range: 47 Hz to 63 Hz
<b>Ventilation</b>	Internal fan with variable speed control; over-temperature detector; magnetic tachometer sensor to detect blocked fan rotor
<b>Display</b>	LCD, 7-segment, 4 full digits, 2 in x 0.75 in
<b>Case construction</b>	High-impact plastic, UL94-VO
<b>Dimensions (WxDxH)</b>	33.7 cm x 29.2 cm x 15.2 cm (13.25 in x 11.5 in x 6 in)
<b>Weight</b>	5.6 kg (14.2 lb)

### Product comparison chart

Model	RF303 <sub>RS</sub>	QA-ES Series II
<b>Test loads</b>	50 $\Omega$ to 750 $\Omega$ in step of 50 $\Omega$ 15 loads	10 $\Omega$ to 2500 $\Omega$ in step of 25 $\Omega$ , 2500 $\Omega$ to 5200 $\Omega$ in step of 100 $\Omega$ 128 loads
<b>Displayed-result parameters</b>	W, mA, $\Omega$	W, mA, Vpp, CF, $\Omega$
<b>High-frequency current</b>	30 mA to 2500 mA RMS	20 mA to 2200 mA $\pm$ 2 % of reading
	Accuracy: $\pm$ 2.5 % or reading or $\pm$ 15 mA, whichever is greater	20 mA to 2200 mA $\pm$ 2 % of reading
<b>Automation capabilities</b>	medTester 5000C	Ansur
<b>Additional benefits</b>	Battery operated	Foot-switch output for triggering the ESU under test

### Optional accessories

**2248587** Multipurpose Hard-Sided, Watertight Carrying Case

**2204472** Serial Cable for D9F-D9F

**2238659** Interface Cable, medTester to RF303RS (RS-232; male DB9 to female DB9; adapter required, p/n 2391789)

**2391789** Adapter for Interface Cable, medTester to RF303RS (male DB9 to female DB25; used with interface cable, p/n 2238659)

### Included accessories

**2202027** Users Manual

**2202009** Accessory Kit

**Accessory kit includes the following:**

**2200904** Active Safety Lead  
**2200872** ESU Dispersive Safety Lead

**2200860** ESU CQM Safety Lead

**2200885** ESU Case Safety Lead

**2200897** ESU Jumper Safety Leads (2)

**2196071** Active Safety Clip, yellow

**2196080** Case Safety Clip, green

**2183792** Fuses (2) 5X20 F3.15A 250V CE

**2242165** Ground Pin Adapter  
**XXXXXXX** Detachable Power Cord (country specific)

### Ordering information

**RF-303<sub>RS</sub>**

**Electrosurgery Analyzer**

**2251504** United States, 120 V

**2394461** Australia, 250 V

**2394477** Denmark, 250 V

**2394489** Schuko, 250 V

**2394492** Israel, 250 V

**2394509** Italy, 250 V

**2394511** India, 250 V

**2394527** Switzerland, 250 V

**2394530** United Kingdom, 250 V

# IDA 4 Plus

## Multi-Channel Infusion Device Analyzer



N10140

IDA 4 Plus Multi-Channel Infusion Device Analyzer maximizes productivity with multiple, independent channels for testing up to four infusion pumps at once.

The device measures instantaneous flow, average flow, occlusion pressure, and analyzes patient-control analgesia (PCA) units. An optional PCA trigger box provides automated PCA pump control, allowing technicians to set up tests and walk away.

An autostart feature simplifies syringe pump testing or other tests that have long startup times.

With built-in memory, the IDA 4 Plus records test results internally and provides easy-to-read test-result graphs right on the analyzer's screen. The display is so large numbers can

be read from across the room

Additionally, the IDA 4 Plus comes with Hydrograph PC software for creating full-color graphs and reports. For automated testing, the IDA 4 Plus is compatible with Fluke Biomedical's medTester 5000C (US only).

### Key features


- Tests up to four infusion pumps simultaneously
- Compatible with virtually any type of infusion device
- Instantaneous and average flow measurement
- Occlusion pressure measurements to 45 psi
- Single- and dual-flow (piggyback) testing
- Full PCA testing (bolus volume, lockout time, and automated external triggering)
- Autostart mode enables unit to begin testing only when fluid is detected
- On-board graphing of pressure and flow
- Built-in memory to save test results for printing or downloading to computer
- Hydrograph graphical software to control unit and display results via PC
- Automated testing through Fluke Biomedical medTester 5000C (US only)
- RS-232 ports
- Optional keyboard, printer, and alarm/PCA

## Specifications

Flow-rate measurement	
Technique	Calculated by measuring a volume over time
Range	0.5 ml/hr to 1000 ml/hr
Accuracy	1 % of reading $\pm$ 1 LSD for flows of 16 ml/hr to 200 ml/hr for volumes over 20 ml; otherwise, 2 % of reading $\pm$ 1 LSD after delivery of 10 ml
Volume measurement	
Technique	Volume measured directly by the transducer in minimum sample sizes of 60 $\mu$ l
Range	0.06 ml to 9999 ml
Accuracy	1 % of reading $\pm$ 1 LSD for flows of 16 ml/hr to 200 ml/hr for volumes over 20 ml; otherwise, 2 % of reading $\pm$ 1 LSD after delivery of 10 ml
PCA bolus measurement	
Technique	Volume is measured directly by the transducer in minimum bolus volumes of 0.5 ml. The measurement is made with a continuous rate between 0 ml/hr and 30 ml/hr. The bolus flow rate should be at least four times the basal flow rate for reliable detection of boluses
Minimum bolus volume	0.5 ml
Accuracy	See volume measurement
Pressure measurement	
Technique	Direct occlusion of the infusion line and measurement of pressure prior to the glass transducer
Range	0 psi to 45 psi and equivalents in mmHg and kPa
Accuracy	1 % of full scale $\pm$ 1 LSD
Back pressure	-100 mmHg to 300 mmHg



Optional PCA Trigger Box

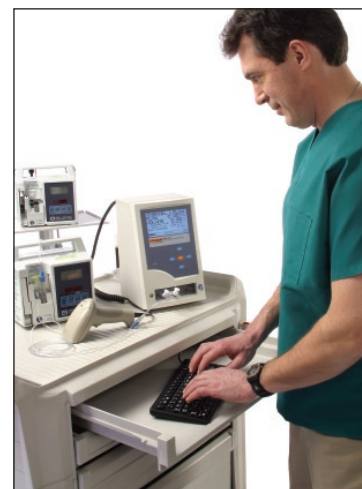



# IDA 4 Plus

## Multi-Channel Infusion Device Analyzer

### Specifications

Electrical specifications	
Supply voltage	Autoswitching 90 V ac to 260 V ac
Supply frequency	50 Hz to 60 Hz
Supply power	< 30 VA
Fuse	20 mm 250 V, 1 A (T) (slow blow)
Earth leakage current	< 1 mA in single fault condition
Environmental conditions	
Operating temperature	15 °C to 30 °C (59 °F to 86 °F)
Storage temperature	0 °C to 40 °C (32 °F to 104 °F) at 85 % RH or less for storage (Do not leave for more than 48 hours at -20 °C/-4 °F)
General information	
Dimensions (LxWxH)	19.05 cm x 18.11 cm x 30.18 cm (7.5 in x 7.2 in x 11.9 in)
Weight	5 kg (11 lb)



### HydroGraph™ Graphics Software

Use the moving color visual advantage of HydroGraph to troubleshoot up to four infusion pumps at once. Data is taken directly off the transducer and transmitted to HydroGraph. The flowing graphs provide an electronic means to display, store, and recall flow patterns for comparison at a later date. Each test window can display instantaneous and average flow rates, cumulative, and bolus volumes; and occlusion pressure.

### Optional accessories

**2245061** External mini-keyboard, 83-key with PS/2 connector and AT adapter  
**2238072** Parallel Printer Cable (D25M-36M)  
**2209703** PCA Trigger/Nurse Call Box  
**2248899** Printer, Seiko DPU-414-30B (120 V power supply) (additional purchase required: parallel printer cable, p/n 2238072)  
**2399531** Printer, Seiko DPU-414-30B (220 V power supply) (additional purchase required: parallel printer cable, p/n 2238072)  
**2235375** Printer (120 V power supply)  
**2235382** Printer (220 V power supply)  
**2200102** Interface Cable, medTester to IDA 4 Plus (without wedge adapter) (RS-232; female DB25 to female DB9)  
**2201042** Interface Cable, medTester to IDA 4 Plus (with or without wedge adapter) (RS-232; female DB9 to female DB25)  
**2245092** Barcode Scanner (with long-reach coil cable with Y connector for keyboard attachment)  
**2238626** Null Modem Cable (female DB9 to female DB9)

### Included accessories

**2213506** Electronic Users Manual and HydroGraph software  
**2217231** 20 ml Priming Syringe  
**2391750** Luerlock-3 way (one for each channel)  
**2238909** 5-foot Plastic Drain Line  
**2238626** Null Modem Cable (female DB9 to female DB9)  
**XXXXXXX** Detachable Power Cord (country specific)

### Ordering information

#### IDA 4 Plus One-Channel Infusion Device Analyzer

**2250063** United States, 120 V  
**2394575** Australia, 250 V  
**2394582** Denmark, 250 V  
**2394594** Shuko, 250 V  
**2394608** Israel, 250 V  
**2394613** Italy, 250 V  
**2394624** India, 250 V  
**2394636** Switzerland, 250 V  
**2394649** United Kingdom, 250 V

#### IDA 4 Plus Two-Channel Infusion Device Analyzer

##### Full testing for up to two infusion pumps simultaneously

**2250088** United States, 120 V  
**2394651** Australia, 250 V  
**2394660** Denmark, 250 V  
**2394672** Shuko, 250 V  
**2394685** Israel, 250 V  
**2394697** Italy, 250 V  
**2394703** India, 250 V  
**2394715** Switzerland, 250 V  
**2394726** United Kingdom, 250 V

#### IDA 4 Plus Three-Channel Infusion Device Analyzer

##### Full testing capability for up to three infusion pumps simultaneously

**2250109** United States, 120 V  
**2394732** Australia, 250 V  
**2394744** Denmark, 250 V  
**2394759** Shuko, 250 V  
**2394767** Israel, 250 V  
**2394771** Italy, 250 V  
**2394780** India, 250 V  
**2394798** Switzerland, 250 V  
**2394800** United Kingdom, 250 V

#### IDA 4 Plus Four-Channel Infusion Device Analyzer

##### Full testing capability for up to four infusion pumps simultaneously

**2250127** United States, 120 V  
**2394817** Australia, 250 V  
**2394821** Denmark, 250 V  
**2394839** Shuko, 250 V  
**2394842** Israel, 250 V  
**2394856** Italy, 250 V  
**2394863** India, 250 V  
**2394874** Switzerland, 250 V  
**2394888** United Kingdom, 250 V

# ESA620

## Electrical Safety Analyzer



The ESA620 Electrical Safety Analyzer represents the next generation in manual, portable electrical safety testers. With selections of three test loads, two protective earth test currents, and two insulation test voltages this versatile product can be used worldwide to enhance productivity and test to standards of choice.

New DSP technology offers better accuracy of leakage measurements throughout the ranges specified in the standards.

Equipped with ten safety-enhanced ECG posts, the ESA620 offers simulation of ECG and performance waveforms so both electrical safety and basic tests on patient monitors can be performed with a single connection. When used with optional Ansur computer-based software plug-in, the ESA620 becomes automated. This allows for standardization of test procedures, capturing and storage of results, comparison to standard limits, and printing of reports thus enabling the sophisticated performance of the high-end electrical safety analyzers.

## Specifications

Voltage	
Range (mains voltage)	90 V ac to 132 V ac rms, 180 V ac to 264 V ac rms
Range (accessible voltage)	0 V ac to 300 V ac rms
Accuracy	± (2 % of reading +2 LSD)
Earth resistance	
Modes	Two terminal or four terminal
Test current	> 200 mA ac or 10 A ac to 25 A ac
Ranges	0 Ω to 2 Ω
Accuracy	± (2 % of reading 0.015 Ω)
Equipment current	
Mode	AC rms
Range	0 A to 20 A
Accuracy	± 5 % of reading ± (2 counts or 0.2 A, whichever is greater)
Leakage current	
Patient load selection (input impedance)	AAMI ES1-1993 Fig 1 IEC 60601: Fig 15 IEC 61010: Fig A-1
Crest factor	≤ 3
Ranges	0 µA to 199.9 µA 200 µA to 1999 µA 2.0 µA to 10.0 mA
Frequency response	DC to 1 kHz 1 kHz to 100 kHz 100 kHz to 1 MHz
Accuracy	± (1 % of reading + 1 µA) ± (2 % of reading + 1 µA) ± (5 % of reading + 1 µA)

## Key features

- Superior compliance with multiple standards: IEC60601, IEC62353, VDE 751, ANSI/AAMI ES1:1993, NFPA-99, AN/NZS 3551, IEC61010
- Three test loads
- Expanded leakage ranges through 10,000 µA
- Dual-lead resistance, leakage, and voltage tests
- AC only, dc only and true-rms leakage readings
- 100 % and 110 % mains voltage for mains on applied part (lead isolation) test
- 200 mA and 25 A AC PE test current
- DSP filter technology for improved accuracy in leakage measurements
- 20 A equipment current
- More applied parts selections
- ECG and performance waveforms
- Intuitive user interface
- Easy-to-use applied parts (ECG) connections
- Insulation posts on applied parts connections
- Five different insulation tests
- Varying insulation test voltage 500 V dc and 250 V dc
- 2- or (optional) 4-wire ground wire resistance
- Large display with adjustable contrast
- Ergonomic design
- Optional Ansur plug-in software
- USB connection
- CE, C-TICK and CSA for USA and Canada
- RoHS compliance
- Optional Ansur test automation software to standardize testing procedures, capture waveforms, and print and document test result



# ESA620

## Electrical Safety Analyzer

### Specifications

<b>Leakage current</b> (continued)	
<b>Mains on applied part test voltage</b>	110 % of mains @ 230 V for IEC 60601 100 % of mains @ 115 V per AAMI 100 % of mains @ 230 V per 62353
<b>Differential leakage</b>	
<b>Ranges</b>	10 $\mu$ A to 199 $\mu$ A 200 $\mu$ A to 1999 $\mu$ A 2 mA to 20 mA
<b>Accuracy</b>	$\pm 10$ % of reading $\pm$ (2 counts or .2 $\mu$ A, whichever is greater)
<b>Insulation resistance</b>	
<b>Ranges</b>	0.5 M $\Omega$ to 20 M $\Omega$ 20 M $\Omega$ to 100 M $\Omega$
<b>Accuracy</b>	$\pm$ (2 % of reading + 2 counts) $\pm$ (7.5 % of reading + 2 counts)
<b>Source test voltage</b>	500 V dc 250 V dc
<b>ECG performance waveforms</b>	
<b>Accuracy</b>	$\pm 2$ % $\pm 5$ % for amplitude of 2 Hz square wave only, fixed @ 1 mV Lead II configuration
<b>Waveforms</b>	<b>Rates</b> ECG complex (BPM): 30, 60, 120, 180, and 240
	<b>Ventricular fibrillation</b> Square wave (50 % duty cycle) (Hz): 0.125 and 2 Sine wave (Hz): 10, 40, 50, 60, and 100 Triangle wave (Hz): 2 Pulse (63 ms pulse width): 30 and 60
<b>Power ratings</b>	
<b>Mains voltage outlet</b>	120 V ac 230 V ac
<b>Mains voltage inlet power range</b>	90 V ac to 132 V ac rms 180 V ac to 264 V ac rms
<b>Maximum current</b>	20 A @ 120 V ac 16 A @ 230 V ac
<b>Hz</b>	50 or 60
<b>Physical case</b>	
<b>Dimensions (LxWxH)</b>	31 cm x 23 cm x 10 cm (12.2 in x 9 in x 2.9 in)
<b>Weight</b>	4.7 kg (10.25 lb)
<b>Certifications</b>	
<b>Certifications</b>	CE: IEC/EN61010-1 2nd Edition; Pollution degree 2 CSA: CAN/CSA-C22.2 No 61010-1; UL61010-1 C-Tick: Australian EMC
<b>Environmental</b>	
<b>Operating temperature</b>	10 °C to 40 °C (50 °F to 104 °F)
<b>Storage temperature</b>	-20 °C to 60 °C (-4 °F to 140 °F)
<b>Operating humidity</b>	10 % to 90 % non-condensing
<b>Altitude</b>	To 2,000 meters @ 230 V ac (main supply voltage)
	To 5,000 meters @ 120 V ac (mains supply voltage)

### Optional accessories

**3116463** Ansur ESA620 Plug-In  
**1903307** Retractable Test Leads  
**2242165** Ground Pin Adapter  
**2067864** Kelvin Cable Set for 4-wire Measurement

### Included accessories

**2814967** Operator's Manual CD  
**2814971** Multilingual Getting Started Guide  
**ESA620 Accessory Kit** (country specific)  
**2195732** 15 A to 20 A adapter (US only)  
**2814980** Carry case  
**1626219** Data Transfer cable  
**3326842** Null Post assembly  
**XXXXXXX** Detachable Power Cord (country specific)  
Test Lead Set

### Ordering information

#### ESA620 Electrical Safety Analyzer

**2785725** United States, 115 V, 20 A  
**3051408** Europe, 230 V  
**3051390** France, 230 V  
**3051413** Israel, 230 V  
**3051436** Australia, 230 V  
**3051449** United Kingdom, 230 V  
**3051451** Switzerland, 230 V  
**3326935** ESA620, US 115V 20A w/Test Automation  
**3326947** ESA620, EUR 230V w/Test Automation  
**3326958** ESA620, FR 230V w/Test Automation  
**3326964** ESA620, ISR 230V w/Test Automation  
**3326986** ESA620, AUS 230V w/Test Automation  
**3326999** ESA620, SWI 230V w/Test Automation  
**3327002** ESA620, UK 230V w/Test Automation

# ESA612

## Electrical Safety Analyzer



The ESA612 Electrical Safety Analyzer represents the next generation in testers for biomedical professionals that perform field service on medical equipment throughout their facilities, in clinics, and anywhere onsite service is required. Portable, lightweight, and designed for operation in tight spaces, the ESA612 offers the functionality of a simulator, multimeter and electrical-safety analyzer in a single test tool.

With selection of two test loads, this versatile product can be used worldwide to test to preventative maintenance electrical safety standards of choice: ANSI/AAMI ES1:1993 (NFPA-99), IEC62353 (VDE 751), and AN/NZS 3551.

The versatility of the multifaceted ESA612 is further expanded with optional automation software, which speeds and simplifies testing and provides high-end-analyzer productivity at software-level investment. Ansur-automated ESA612 standardizes test procedures, compares results to standards limits, and generates and stores reports for total digital data management.

### Key features

- Portable, ergonomic, light-weight and easy to use
- Large, easy-to-read display with adjustable contrast
- Human-factors-designed user interface
- Tilt stand design for stand-up testing in field environments
- Five applied parts jacks and easy ECG snap connection with optional expander box
- ECG waveform tests and dual-lead measurements combine the functionality of a simulator, multimeter and electrical-safety analyzer in a single test tool
- Replaceable mains fuses keep the device in the field and out of the repair shop
- Internal memory for 100 test records
- 20 A at 120 V current capability
- USB connection for use with Ansur and Data Viewer software (for memory download to PC)
- Two-year extended warranty (no-cost, available after first-year calibration at the Fluke Biomedical Cleveland Service Center)
- Optional Ansur automation software standardizes test procedures, compares results to standards limits, generates/stores reports and provides total digital data management
- Rigorously tested for rugged field applications, with CE and CSA in addition to the Fluke-quality-design stamp of approval

## Specifications

Voltage	
Range (mains voltage)	90 V ac to 132 V ac rms, 180 V ac to 264 V ac rms
Range (accessible voltage)	0 V ac to 300 V ac rms
Accuracy	± (2 % of reading + 0.2 V)
Voltage tests	Mains and point-to-point
Earth resistance	
Mode	Two terminal
Test current	> 200 mA ac
Range	0 Ω to 2 Ω
Accuracy	± (2 % of reading + 0.015 Ω)
Resistance tests	Earth resistance and point-to-point
Equipment current	
Mode	AC rms
Range	0 A to 20 A
Accuracy	± 5 % of reading + (2 counts or 0.2 A, whichever is greater)
Duty cycle	15 A to 20 A, 5 min on/5 min off, 10 A to 15 A, 7 min on/3 min off, 0 A to 10 A continuous
Leakage current	
Modes*	AC + DC (true-rms)
	AC only
	DC only
*Modes are available in all leakage tests with the exception of MAP leakages that are available only in true-rms.	
Patient load selection (input impedance)	AAMI ES1-1993 Fig. 1, IEC 60601: Fig 15
Crest factor	≤ 3

### Optional accessories

**1903307** Retractable Test Leads  
**2242165** Ground Pin Adapter (US receptacle testing ground lug)  
**3392119** 1210 Adapter Box Assembly  
**3454829** Ansur ESA612 Plug-In License Key



# ESA612

## Electrical Safety Analyzer

### Specifications

Ranges	0 $\mu$ A to 199.9 $\mu$ A, 200 $\mu$ A to 1999 $\mu$ A, 2 mA to 10 mA	
Frequency response/ accuracy	DC to 1 kHz	$\pm$ (1 % of reading + (1 $\mu$ A or 1 LSD, whichever is greater))
	1 kHz to 100 kHz	$\pm$ (2 % of reading + (1 $\mu$ A or 1 LSD, whichever is greater))
	1 kHz to 5 kHz (current > 1.6 mA)	$\pm$ (4 % of reading + (1 $\mu$ A or 1 LSD, whichever is greater))
	100 kHz to 1 MHz	$\pm$ (5 % of reading + (1 $\mu$ A or 1 LSD, whichever is greater))
Note: Accuracy for Isolation, MAP, Direct AP, Alternative AP, and Alternative Equipment leakage tests all ranges are + (2.5 $\mu$ A or 1 LSD, whichever is greater)		
Leakage tests	Ground wire (earth), Chassis (enclosure), Lead to ground (patient), Lead to lead (patient auxiliary), Lead isolation (mains on applied part), Direct equipment , Direct applied part, Alternative equipment, Alternative applied part, Point to point	
Mains on applied part test voltage	100 % of mains	
Differential leakage		
Ranges	10 $\mu$ A to 199 $\mu$ A, 200 $\mu$ A to 2000 $\mu$ A, 2 mA to 20 mA	
Accuracy	$\pm$ 10 % of reading + (2 counts or 20 $\mu$ A, whichever is greater)	
Insulation resistance		
Ranges	0.5 M $\Omega$ to 20 M $\Omega$ , 20 M $\Omega$ to 100 M $\Omega$	
Accuracy	$\pm$ (2 % of reading + 0.2 M $\Omega$ ), $\pm$ (7.5 % of reading + 0.2 M $\Omega$ )	
Source test voltage	500 V dc , 250 V dc	
Insulation resistance tests	Mains-PE, AP-PE, Mains- PE, Mains-NE (non-earthed accessible conductive part) and AP- NE (non-earthed accessible conductive part)	
ECG performance waveforms		
Accuracy	$\pm$ 2 % $\pm$ 5 % for amplitude of 2 Hz square wave only, fixed at 1 mV Lead II configuration	
Waveforms: rates	ECG complex (BPM): 30, 60, 120, 180, and 240 Square wave (50 % duty cycle) (Hz): 0.125 and 2	
Ventricular fibrillation	Sine wave (Hz): 10, 40, 50, 60, and 100	
	Triangle wave (Hz): 2	
	Pulse (63 ms pulse width): 30 BPM and 60 BPM	
Power ratings		
Mains voltage outlet	120 V ac or 230 V ac	
Mains voltage inlet power range	90 to 132 V ac rms	180 to 264 V ac rms
Maximum current	20 A	16 A
Hz	50 or 60	50 or 60
Physical case		
Dimensions (L x W x H)	17.63 cm x 8.38 cm x 28.45 cm (6.94 in x 3.30 in x 11.20 in)	
Weight	1.6 kg (3.5 lb)	
Environmental specifications		
Operating temperature	10 $^{\circ}$ C to 40 $^{\circ}$ C (50 $^{\circ}$ F to 104 $^{\circ}$ F)	
Storage temperature	-20 $^{\circ}$ C to 60 $^{\circ}$ C (-4 $^{\circ}$ F to 140 $^{\circ}$ F)	
Operating humidity	10 % to 90 % non-condensing	
Altitude	120 V ac mains supply voltage up to 5,000 m, 230 V ac mains supply voltage up to 2,000 m	
General		
Warranty	Two-year extended warranty (no-cost, available after first-year calibration at the Fluke Biomedical Cleveland Service Center, otherwise standard one-year warranty applies)	

### Included accessories

**3334509** Operator's Manual (multilingual CD)

**3334511** Getting-Started Guide (hard copy, multilingual)

**2795488** Ansur ESA612 Plug-In, CD with demo version

**1626219** Data Transfer Cable

**ESA612 Accessory Kit** (country specific)

**2195732** 15 A to 20 A Adapter (US only)

**3326842** Null Post Adapter

**3359538** 5-to-5 Banana Jack to ECG (BJ2ECG) Adapter

**2248650** Carry Case

**XXXXXXX** Detachable Power Cord (country specific)

Test Lead Set

### Ordering information

**3367232** ESA612 Electrical Safety Analyzer (US), 115 V 20 A

**3367259** ESA612 Electrical Safety Analyzer (Europe), 230 V

**3367244** ESA612 Electrical Safety Analyzer (France), 230 V

**3367267** ESA612 Electrical Safety Analyzer (Israel), 230 V

**3367271** ESA612 Electrical Safety Analyzer (Australia), 230 V

**3367280** ESA612 Electrical Safety Analyzer (UK), 230 V

**3367298** ESA612 Electrical Safety Analyzer (Switzerland), 230 V

**3454793** ESA612 Electrical Safety Analyzer (Thailand), 230 V

**3461965** ESA612 Electrical Safety Analyzer (Japan), 100 V

**3460932** ESA612 Electrical Safety Analyzer (US), 115 V 20 A w/Test Automation

**3460959** ESA612 Electrical Safety Analyzer (Europe), 230 V w/Test Automation

**3460944** ESA612 Electrical Safety Analyzer (France), 230 V w/Test Automation

**3460967** ESA612 Electrical Safety Analyzer (Israel), 230 V w/Test Automation

**3460971** ESA612 Electrical Safety Analyzer (Australia), 230 V w/Test Automation

**3460980** ESA612 Electrical Safety Analyzer (UK), 230 V w/Test Automation

**3460998** ESA612 Electrical Safety Analyzer (Switzerland), 230 V w/Test Automation

**3461001** ESA612 Electrical Safety Analyzer (Thailand), 230 V w/Test Automation

**3462285** ESA612 Electrical Safety Analyzer (Japan), 100 V w/Test Automation

# ESA601

## Electrical Safety Analyzer



ESA601 Electrical Safety Analyzer tests laboratory and hospital equipment to both US and international standards. Users simply flip a switch to change between AAMI or IEC electrical safety testing load. The US version includes overlays in AAMI or IEC nomenclature so technicians use the terms that are most familiar to them. Multiple language overlays, outlets, and power cords are available for convenient use in many countries.

Ten applied part connections

allow for lead-to-ground (patient), lead-to-lead (patient auxiliary), and lead isolation (mains on applied part) leakage testing of equipment with multiple applied parts.

Designed for on-the-go testing, the portable analyzer is lightweight and compact and comes with a sturdy handle for easy carrying.

For an automated solution, Fluke Biomedical's Ansur software plug-in for the ESA601 allows technicians to use a PC to run autosequences, document results, and print reports.



### Key features

- Selectable AAMI or IEC test loads
- Ten applied parts-lead connectors
- 90 V (min) to 264 V (max) autoswitching power supply
- Dual-lead leakage and dual-lead voltage tests
- Easy-to-read display
- Compact and portable
- Ansur plug-in software available to automate testing and document results
- Multiple outlets and power cords for compatibility in multiple countries
- Overlays in English, German, French, and Italian
- Overlay for USA version with either IEC or AAMI nomenclature
- RS-232 serial port for PC control and printing
- Optional Ansur test automation software to standardize testing procedures, capture waveforms, and print and document test result

### Specifications

Power	
Mains power operating range	90 min to 264 max V ac (47 Hz to 63 Hz), autoswitching
Power ratings	16 A at 264 V max
Mains inlet	
Mains inlet	The instrument uses a standard IEC 60320-1/C20 mains inlet rated at 16 A and 250 V for class-1 equipment in cold conditions.

### Optional accessories

**2556755** Ansur ESA601 Plug-in  
**2004175** Alligator Clamp  
**2391669** Banana/ECG Adapter  
**2248899** Printer, Seiko DPU-414-30B (with choice of 120 V power supply, p/n 2235375; or 220 V power supply p/n 2235382)  
**2185787** North American 220 V Adapter Kit  
**2238659** Interface Cable (RS-232; male DB9 to female DB9)

### Product comparison chart

Model	175	180	232D	ESA620
Test modes	Manual	Manual	Manual	Manual
	—	—	—	Automated with Ansur
	—	—	—	—
Test loads	AAMI	AAMI	AAMI	AAMI
	—	—	—	IEC60601-1
	—	—	—	IEC61010
PE test current	10 mA dc	10 mA dc	10 mA dc	200 mA ac 25 mA ac
20A device testing	No	Yes	No	Yes
ECG waveforms	no	No	Yes	Yes

# ESA601

## Electrical Safety Analyzer

### Specifications

Voltage measurements	
Range (mains voltage)	90 V to 264 V true-rms
Range (accessible voltage)	0 V to 264 V true-rms
Accuracy	± 2 % of reading ± 2 V dc
Earth-resistance measurements	
Range	0 Ω to 1.999 Ω
Accuracy	± 2 % of reading ± 5 MΩ
Current source amplitude	1 A dc (± 10 %)
Insulation measurements	
Range	0.5 M to 100 MΩ
Accuracy	0.5 MΩ to 20 MΩ, ± 2 % of reading, ± 200 kΩ; above 20 MΩ, ± 5 % of reading, ± 200 kΩ
Voltage source amplitude	500 V dc (± 10 %)
VDE differential current	
Range	10 μA to 10000 μA
Accuracy	± 2 % of full scale
Leakage-current measurements	
Measurement range	0 μA to 8000 μA true-rms
Accuracy	± 1 % of reading ( ± 2 μA) @ dc and 25 Hz to 1000 Hz*; ± 2.5 % of reading ( ± 2 μA) 1 kHz to 200 kHz * Full scale input Accuracy of mains-on-applied-part leakage currents: ± 2 % of reading ± 6 μA Frequency response: DC to 1 MHz (-3 dB)
Crest factor	< 3
Input impedance	Per figure 15 of IEC601-1 or AAMI ES 1
Dual lead leakage	500 μA to 8000 μA
Environmental specs	
Operating temperature	10 °C to 40 °C (50 °F to 104 °F)
Storage temperature	-25 °C to 50 °C (-13 °F to 122 °F)
Maximum humidity	80 % relative humidity up to 31 °C (88 °F), decreasing linearly to 50 % relative humidity at 40 °C (104 °F)
Dimensions (LxWxH)	24.0 cm x 21.1 cm x 7.6 cm (9.8 in x 8.2 in x 3.0 in)
Weight	2.4 kg (5.2 lb)

Model	ESA601	ESA601 Pro SeriesXL	medTester 5000C
Test modes	Manual	Automatic	Automatic
	Automated with Ansur	Stepwise	Manual
	—	Manual	—
Test loads	AAMI	AAMI	AAMI
	IEC60601	IEC60601	—
	—	IEC61010	—
PE test current	1 A dc	1 A ac 10 A ac 25 A ac	100 mA dc
20A device testing	No	No	Yes
ECG waveforms	No	Yes	Yes

### Included accessories

2388919 Users Manual and Ansur ESA601 Plug-in Demo Software on CD  
2243822 Getting Started Guide  
2248650 Soft-sided Carrying Case  
2391738 Red Lead  
2391723 Black Lead  
2391714 Alligator/Banana Adapters (five each)

### Ordering information

#### ESA601 Electrical Safety Analyzer

2249883 Australian outlet, Australian line cord, and English 1 overlay  
2249909 Schuko outlet, Schuko line cord, and German overlay  
2249927 Schuko outlet, Schuko line cord, and French overlay  
2249948 Schuko outlet, Schuko line cord, and Italian overlay  
2434154 Israeli outlet, Israeli line cord, and English 1 overlay  
2404834 Schuko outlet, Schuko line cord, and English 1 overlay  
2249966 UK outlet, UK line cord, and English 1 overlay  
2249982 US outlet, US line cord, and English 1 overlay utilizing IEC nomenclature  
2404852 US outlet, US line cord, and English 2 overlay utilizing AAMI (NPPA99) nomenclature  
3334732 ESA601, 230V AUS w/Test Automation  
3334744 ESA601, DEU 230V SHK w/Test Automation  
3334759 ESA601, FRA 230V SHK w/Test Automation  
3334767 ESA601, ITA 230V SHK w/Test Automation  
3334771 ESA601, ISR 230V w/Test Automation  
3334780 ESA601, 230V SHK w/Test Automation  
3334798 ESA601, 230V UK w/Test Automation  
3334800 ESA601, 115V IEC w/Test Automation  
3334817 ESA601, 115 AAMI w/Test Automation

# 601 Pro Series<sub>XL</sub>

## Electrical Safety Analyzer



The 601 Pro Series<sub>XL</sub> is the most advanced Electrical Safety Analyzer on the market. The One-Touch-Testing user interface is an industry exclusive that allows the user to perform rapid tests on various medical devices without having to maneuver around cumbersome menus. This full-featured safety analyzer combines the IEC60601-1, IEC61010-1, and ANSI/AAMI ES1 standard test loads into one device, so you can do all your testing at once.

Templates feature reduces your data entry, making your electrical-safety testing faster and easier!

Save the protective-earth test current at the default value you prefer, whether it is 1 A, 10 A, or 25 A. You are no longer limited to the 1 A default.

### Key features

- IEC60601-1, IEC61010-1, and ANSI/AAMI ES1 test loads, user selectable
- Multiple patient-applied-part types
- Power ON/OFF delays
- DC-only current for patient- and auxiliary-leakage tests
- User-programmable test sequences
- Manual, auto, step, and computer-control modes
- 1 A, 10 A, or 25 A ac protective-earth-resistance test circuit
- Memory for up to 1000 device-information records
- Integrated printer

## Specifications

	Voltage (single and dual lead)	Insulation resistance	Protective earth resistance	Current consumption
<b>Range</b>	0 V to 300 V	0.5 MΩ to 400 MΩ	0 to 2.999	0 A to 15 A
<b>Accuracy</b>	DC to 100 Hz ± 1.5 % of reading ± 1 LSD	± 5 % of reading ± 2 LSD	± 5 % of reading ± 4 mΩ (1 A, 10 A, and 25 A test currents)*	± 5 % of reading ± 2 LSD

\*For additional specifications qualifying the varying effects on accuracy, please contact us.



# 601 Pro Series<sub>XL</sub>

## Electrical Safety Analyzer

### Specifications

IEC60601-1 and AAMI leakage current	
Range	0 $\mu$ A to 8000 $\mu$ A true-rms or dc only
Accuracy	(per IEC60601-1 or AAMI) DC to 1 kHz $\pm 1\%$ of reading $\pm 1\ \mu$ A 1 kHz to 100 kHz $\pm 2\%$ of reading $\pm 1\ \mu$ A 100 kHz to 1 MHz $\pm 5\%$ of reading $\pm 1\ \mu$ A
Mains on applied part, equivalent device, and equivalent patient leakage current tests the following exceptions apply	
Applied voltage	$\geq 110\%$ of mains voltage
Accuracy	$\pm 2\%$ of reading $\pm 6\ \mu$ A
IEC61010-1 leakage current	
Range	0 $\mu$ A to 16000 $\mu$ A true-rms or dc only
Accuracy	(per IEC 61010-1 Fig. A.1 filter) DC to 1 kHz $\pm 2\%$ of reading $\pm 1\ \mu$ A 1 kHz to 100 kHz $\pm 4\%$ of reading $\pm 2\ \mu$ A 100 kHz to 1 MHz $\pm 10\%$ of reading $\pm 10\ \mu$ A
Waveform simulation	
Normal sinus rhythm	30 BPM, 60 BPM, 120 BPM, 180 BPM, and 240 BPM
Performance pulse	30 BPM and 60 BPM
Sine	10 Hz, 40 Hz, 50 Hz, 60 Hz, and 100 Hz
Square	0.125 Hz 2 Hz (50 % duty cycle)
Triangle	2 mV 2 Hz
Arrhythmia	A-Fib A-Flutter A-TAC Idioventricular PVC1 R-on-T Run V-Fib V-Tach
Performance	$\pm 2\%$ of reading for rate of $\pm 5\%$ of reading for amplitude, fixed at 1 mV peak on a Lead II ECG connection (except for triangle wave, which is 2 mV peak to peak)
General	
Power	Autoswitching, 90 V ac to 265 V ac
Dimensions (LxWxH)	42.2 cm x 30 cm x 14.1 cm (16.62 in x 11.75 in x 5.56 in)
Weight	7.7 kg (17 lb)

### Optional accessories

**2248899** External Parallel Printer Port  
**2245061** Compact Keyboard  
**2234065** Carrying Case  
**2238659** RS-232 Cable  
**2245092** Barcode Scanner (optical)  
**2238072** Parallel Printer Cable, D25M-C36M  
**2235375** 120 V ac Adapter  
**2235382** 220 V ac Adapter

### Included accessories

**2234222** Operator's Manual  
**2391723** Black Test-Lead Set  
**2391738** Red Test-Lead Set

### Ordering information

**ESA601 Pro Series<sub>XL</sub>**  
**2250323** Schuko receptacle, english overlay, with internal printer  
**2250314** Schuko receptacle, english overlay, without internal printer  
**2250361** UK receptacle, english overlay, with internal printer  
**2250350** UK receptacle, english overlay, without internal printer  
**2250306** Australian receptacle, english overlay, with internal printer  
**2250298** Australian receptacle, english overlay, without internal printer  
**2250389** 601 Pro Series<sub>XL</sub>—USP: US receptacle, english overlay, with internal printer  
**2250377** US receptacle, english overlay, without internal printer  
**2250345** Schuko receptacle, german overlay, with internal printer  
**2250338** Schuko receptacle, english overlay, without internal printer

# QA-90 MKII

## Electrical Safety Analyzer



The QA-90 represents a new generation of safety testing equipment. QA-90 is the only automatic safety tester that can test Instruments containing modules with different classes of protection in one test run (i.e. CF and BF defibrillators). It is simple to use. All you need

to do is select the type and class of the equipment to be tested. When you press START, the QA-90 will execute the tests prescribed in the selected standard.

The test result can either be printed out immediately or stored internally in the unit for later use. The QA-90 can be fully remotely controlled via ansur software. With ansur, you can make your own test protocols, store the information on disk and export formatted data to equipment management databases.

## Specifications

### Test sequence

Individual test sequences may be compiled to satisfy national and international standards: IEC 60601.1, VDE 0750 T1/12-91, BS 5724, UL 2601.1, CAN/CSA-C22.2 No 601.1-M90, AS 3200.1, NZS 6150:1990, VDE 0751:1990, VDE 0751:2001, IEC 60601.1.1, IEC 60601.2.4, UL 544, HEI 95, DB9801 and more

### Voltage measurement

The voltage measurement may be executed in the following ways

- Between lead 1 and 2
- Between lead 1 and Earth
- Between lead 2 and Earth
- Between input/output E+ and E- (floating inputs/outputs)

**Range** 0 V to 400 V true-rms

**Resolution** 0.1 V

**Accuracy** DC to 100 Hz 1 % of full scale  $\pm$  1 LSD  
100 Hz to 1 kHz 2 % of scale  $\pm$  1 LSD

**Number of tests** Four or multiple

### Current consumption

The current measurement may be executed in lead no. 1 (live)

**Range 1** 0 mA to 1000 mA true-rms (@ < 250 V ac)

Resolution : 1 mA

Accuracy :  $\pm$  2 % of full scale  $\pm$  1 LSD

Number of tests: 1 or multiple

**Range 2** 1 A to 16 A true-rms (@ < 250 V ac)

Resolution: 1 mA

Accuracy:  $\pm$  1 % of full scale  $\pm$  1 LSD

Number of tests: 1 or multiple

### Protective earth

The test current is 25 A or 1 A, delivered from a transformer with a maximum idle voltage of 6 V. The measurement can be performed on ground leads or between E+ and E- (floating inputs/outputs)

**Range** 0 M $\Omega$  to 2000 M $\Omega$

**Resolution** 1 M $\Omega$

**Accuracy**  $\pm$  2 % of full scale or 5 % of reading

**Number of tests** 1, 2, or multiple

### Insulating resistance

The measurement of the insulating resistance may be executed between casing and power unit, or between patient module and power unit

**Test voltage** 500 V dc through a 130 k $\Omega$  limiting resistor

**Number of tests** 1, 2, or multiple

## Key features

- Small size—easy to carry
- Can operate completely stand-alone or by remote control with the ansur software
- Tests instruments containing modules with different protection classes in one test run i.e. CF and BF (defibrillator)
- Tests module separation
- Residual current measurements (optional)
- 11 patient inputs (laboratory style)
- Test according to: IEC 60601.1, IEC 60601.1.1, IEC 60601.2.4, IEC 61010, VDE 751-1:1990, VDE 751-1: 2001, UL 2601.1, AS 3200.1, DB 9801, HEI 95, AAMI
- Testing against standard or user defined limits
- Automatic, stepwise and manual test modes
- Programmable power up delay time before measurements
- Integrated keypad
- Internal memory for uploading test sequences and storing typically up to 200 equipment test results
- Built-in standard A4 protocols for on site documentation (localized)
- RS-232, centronics and bar code interface
- Optional Ansur test automation software to standardize testing procedures, capture waveforms, and print and document test result

# QA-90 MKII

FLUKE®

Biomedical

## Electrical Safety Analyzer

### Specifications

<b>Range 1</b>	1 MΩ to 50 MΩ Resolution: 1 MΩ Accuracy: $\pm 2\%$ of full scale $\pm 1$ LSD
<b>Range 2</b>	5 MΩ to 200 MΩ Resolution: 1 MΩ Accuracy: $\pm 2\%$ of full scale $\pm 1$ LSD
<b>Leakage currents</b>	
All measurements can be performed with a IEC 601.1 filter (patient equivalent), or without (flat frequency response). The filter can be exchanged with filters covering other standards. All measurements can be performed as true-rms measurements, or ac/dc measurements.	
<b>Leakage currents are measured</b>	<b>Number of tests:</b> Earth leakage current – 4 Enclosure leakage current – 6 or multiple Residual current – 2 Substitute equipment current – 1 Direct current – 2 Current Fig. 9 – 1
<b>Leakage currents are measured for each module</b>	<b>Number of tests:</b> Patient leakage current – 6 Mains on applied part leakage current – 2 Patient Auxiliary current – 6 Floating dual lead measurement of leakage currents – Multiple Substitute patient current – 1
In one test run a maximum of 11 modules with different protection classes may be tested	
<b>Accuracy</b>	
<b>Range 1</b>	0 to 99.9 $\mu$ A Resolution: 0.1 $\mu$ A Accuracy: $\pm 2\%$ of full scale $\pm 1$ LSD
<b>Range 2</b>	100 $\mu$ to 1000 $\mu$ A Resolution: 1 $\mu$ A Accuracy: $\pm 2\%$ of full scale $\pm 1$ LSD
<b>Range 3</b>	1.0 mA to 10.0 mA Resolution: 1 $\mu$ A Accuracy: $\pm 1\%$ of full scale $\pm 1$ LSD
<b>Frequency response</b>	
Dc to 1 MHz ( $-3$ dB) with a crest factor: $> 2$ . The test voltage for the mains on applied part measurement is 110 % of the line voltage, delivered through a limiting resistor of 47 kΩ.	
<b>Ansurs software</b>	
<b>Remote control</b>	All functions and tests in QA-90 may be performed from the PC
<b>User-definition of test standards</b>	Select predefined standards or create your own local/new standard with test limits
<b>User-programmable test sequences</b>	Allows user-defined test sequences with a selection of tests from the selected test standard
<b>Customized protocols</b>	Create your own protocol format including a header, checklist, job instructions, a command field and a test sequence
<b>Storage and recall</b>	Protocol formats and data may be stored, recalled, printed out, or transferred to D-base systems
<b>General information</b>	
<b>Temperature requirements</b>	+ 15 °C to +35 °C while operating; 0 °C to +50 °C for storage
<b>Display</b>	Type: LCD Alphanumeric format: Four lines by 40 characters Display control: 7 F-keys and a keypad
<b>Data input/outputs (2)</b>	Parallel printer port (1); bi-directional RS-232 (1) for computer control Bar code interface
<b>Power</b>	From 100 V ac to 240 V ac, 47 Hz to 63 Hz
<b>Housing</b>	Metal case
<b>Dimensions (LxWxH)</b>	305 mm x 342 mm x 132 mm
<b>Weight</b>	5.8 kg
<b>Recommended printers</b>	HP Desk Jet, Canon Bubble Jet or compatible

### Optional accessories

Data transfer cable, RS-232

**2462909** Carrying Case

**2463016** Ansurs test software, QA-90 plug-in license

### Included accessories

**2462072** Banana Adapter, 10 pk

**2462975** E-Input Measuring Cable, 2 m, black

**2523266** Clamp, Crocodile Style, black

**QA-90-1CD** Users Manual on CD

**XXXXXXX** Detachable Power Cord (country specific)

### Ordering information QA-90 MKII Electrical Safety Analyzer

**2462865** United States, 115 V

**2462876** Europe, 230 V

**2556858** United Kingdom, 230 V

**2557155** Australia, 230 V

**3277167** Denmark, 230 V

# Electrical Safety Analyzer



N10140

The handheld 180 Electrical Safety Analyzer is a lightweight, portable device for testing electrical systems, medical devices, and physiological instrumentation. The device includes the AAMI test load and has five jacks for patient applied parts testing.

Small enough to fit in a briefcase, the analyzer works well as a bench-top instrument in the laboratory or a portable testing device in the mobile engineer's toolbox. With its uncomplicated design, the 180 is simple to use.

A single master function switch, directly labeled with the test to be performed, leads the user through a complete measurement procedure.

The analyzer uses simple, yet sophisticated, electronics for true-rms measurement of current and voltage. The 180 also performs dual-lead leakage and resistance tests.

## Key features

- Handheld
- Self-switching 120 V and 240 V operation
- 15 A and 20 A capabilities
- Five patient applied parts jacks
- Dual-lead testing

## Specifications

Operating mains voltage range	90 V ac to 240 V ac
Current capacity for DUT	Line 90 V to 140 V: 20 A for 5 min, 15 A for 30 min; line over 140 V: 10 A
<b>Line-voltage measurement</b>	
Range	90 V to 240 V
Accuracy	$\pm 3\%$ of reading $\pm 1$ LSD
<b>Load-current measurement</b>	
Range	1 A to 19.99 A
Accuracy	$\pm 5\%$ of reading $\pm 1$ LSD
<b>Leakage-current measurement</b>	
Range	0 $\mu$ A to 1999 $\mu$ A
Accuracy	DC and 25 Hz to 1 kHz: $\pm 1\%$ of reading $\pm 1$ $\mu$ A; 1 kHz to 100 kHz: $\pm 2.5\%$ of reading $\pm 1$ $\mu$ A; 100 kHz to 1 MHz: $\pm 5\%$ of reading $\pm 1$ $\mu$ A
Measurement type	True-rms; input impedance per AAMI ES1-1993
<b>Isolation test</b>	
Isolation source voltage	110 % of mains, $\pm 5\%$ of reading
Current limit	1 mA @ 120 V ac
<b>Resistance measurement</b>	
Range	0.01 $\Omega$ to 19.99 $\Omega$
Accuracy	$\pm 1\%$ of reading $\pm 1$ LSD
Resolution	0.01 $\Omega$
Current source	10 mA dc
<b>Environmental requirements</b>	
Operating temperature	15 $^{\circ}$ C to 40 $^{\circ}$ C (59 $^{\circ}$ F to 104 $^{\circ}$ F)
Storage temperature	-20 $^{\circ}$ C to 65 $^{\circ}$ C (-4 $^{\circ}$ F to 149 $^{\circ}$ F)
Relative humidity	90 % max
Mains voltage range	90 V to 240 V
<b>General information</b>	
Display	LCD 3.5 digit
Dimensions (LxWxH)	13.3 cm x 18.4 cm x 5.4 cm (5.25 in x 7.25 in x 2.1 in)
Weight	Max weight 1 kg (2.25 lb)

## Optional accessories

- 2248864 Soft-sided Vinyl Carrying Case
- 2392409 Chassis Cable, coil cord, 8-foot extended
- 2392411 Chassis Cable, coil cord, 16 foot extended
- 2392448 External Leakage Cable, coil cord, 8 foot extended
- 2231563 External Leakage Cable, coil cord, 16 foot extended
- 2185787 North American 220 V adapter kit

## Included accessories

- 2185754 Users Manual
- 2392409 Test Lead 8 foot, black

## Ordering information

- 2249852 180 Electrical Safety Analyzer, US, 90 V to 265 V



# Electrical Safety Analyzer



N10140

The 175 Electrical Safety Analyzer is ideal for performing quick electrical safety checks on electrical systems, medical devices, and physiological instrumentation.

Small enough to fit in a briefcase, the analyzer works well as a bench-top instrument in the laboratory or a portable testing device in the mobile engineer's toolbox.

With its uncomplicated design, the 175 is simple to use. A single master function switch, directly

labeled with the test to be performed, leads the user through a complete measurement procedure. The unit features both IEC601-1 and AAMI test loads. Technicians simply flip a switch to perform leakage measurements to a particular standard.

The analyzer uses simple, yet sophisticated, electronics for true-rms measurement of current and voltage. The 175 also performs dual-lead leakage tests.

## Key features

- Portable
- IEC601-1 and AAMI test loads
- Self-switching 120 V and 240 V operation
- Dual-lead testing

## Specifications

Operating mains voltage range	90 V ac to 240 V ac
Current-capacity for DUT	15 A for 10 min
<b>Voltage measurement</b>	
Range	90 V to 240 V
Accuracy	$\pm 3\%$ of reading $\pm 1$ LSD
<b>Load-current measurement</b>	
Range	1 A to 19.99 A
Accuracy	$\pm 5\%$ of reading $\pm 1$ LSD
<b>Resistance measurement</b>	
Range	0.01 $\Omega$ to 19.99 $\Omega$
Accuracy	$\pm 1\%$ of reading $\pm 1$ LSD
Resolution	0.01 $\Omega$
Current source	10 mA dc
<b>Leakage-current measurement</b>	
Range	0 $\mu$ A to 1999 $\mu$ A
Accuracy	DC and 25 Hz to 1 KHz: $\pm 1\%$ of reading $\pm 1$ $\mu$ A; 1 KHz to 100 KHz: $\pm 2.5\%$ of reading $\pm 1$ $\mu$ A; 100 KHz to 1 MHz: $\pm 5\%$ of reading $\pm 1$ $\mu$ A
Measurement type	True-rms
Input impedance	1000 $\Omega$ per AAMI ES1-1993, IEC601-1
<b>Environmental requirements</b>	
Operating temperature	15 $^{\circ}$ C to 40 $^{\circ}$ C (59 $^{\circ}$ F to 104 $^{\circ}$ F)
Storage temperature	-20 $^{\circ}$ C to 50 $^{\circ}$ C (-4 $^{\circ}$ F to 122 $^{\circ}$ F)
Relative humidity	Max 80 % up to 31 $^{\circ}$ C (88 $^{\circ}$ F), decreasing linearly to 50 % at 40 $^{\circ}$ C (104 $^{\circ}$ F)
<b>General information</b>	
Display	LCD 3.5 digit
Dimensions (LxWxH)	13.3 cm x 18.4 cm x 5.4 cm (5.25 in x 7.25 in x 2.1 in)
Weight	Max weight: 1 kg (2.25 lb)

## Optional accessories

- 2248864 Soft-sided Vinyl Carrying Case
- 2392409 Chassis Cable, coil cord, 8-foot extended
- 2392411 Chassis Cable, coil cord, 16 foot extended
- 2392448 External Leakage Cable, coil cord, 8 foot extended
- 2231563 External Leakage Cable, coil cord, 16 foot extended
- 2185787 North American 220 V adapter kit

## Included accessories

- 2185754 Operator's Manual
- 2392409 Test Lead 8 foot, black

## Ordering information

- 2249841 175 Electrical Safety Analyzer, US, 90 V to 265 V

# LT544DLITE

## Digital Safety Tester



This device is designed to perform simple electrical safety tests on any type of medical equipment, whenever patient lead testing is not required.

The rugged, hand-held instrument is built for quick and easy use. A simple selector knob controls the functions: Leakage Current and Chassis Resistance. Accurate test measurements are shown on the large display.

Heavy-duty switches change polarity, open and close the

neutral and select Chassis or Earth Leakage Current measurements. A four-wire Kelvin bridge eliminates reading errors in resistance due to cable length and contact resistance. True-rms measurements are provided for all current readings. The AAMI test load is utilized.

### Key features

- Small, lightweight, self-contained portable instrument
- Universal power supply – input voltage from 85 V ac to 265 V ac
- Chassis resistance measurements are made with a four-wire Kelvin bridge to eliminate errors due to cable length
- Test method complies with AAMI load per ANSI/AAMI ES1-1993
- Leakage current can be measured in Open/Closed Neutral, Normal/Reversed Polarity and Open/Closed Ground
- All Leakage current measurements are displayed directly in  $\mu\text{A}$

## Specifications

Ground resistance	
Range	0 $\Omega$ to 19.99 $\Omega$
Accuracy	$\pm 1\% \text{ R}, \pm 1 \text{ LSD}$
Resolution	10 m $\Omega$
Leakage current	
Range	0 $\mu\text{A}$ to 1,999 $\mu\text{A}$
Accuracy	DC and 25 Hz to 1 kHz: $\pm 1\%$ of reading, $\pm 3 \text{ LSD}$ 1.0 KHz to 100 KHz: $\pm 2.5\%$ of reading, $\pm 3 \text{ LSD}$ 100 KHz to 1 MHz: $\pm 5\%$ of reading, $\pm 3 \text{ LSD}$
Current capacity	
LT544DLite- 1515	15 A at 120 V ac
LT544DLite- 230 V	10 A at 230 V ac
LT544DLite- 1520/2020	20 A, at 230 V ac, 20 % duty cycle (2 minutes on, 8 minutes off)
Controls	1. Function switch – 4 position rotary 2. Neutral switch – 2 position rocker (Open/Closed) 3. Polarity switch – 3 position rocker (Normal/Off/Reversed) 4. Leakage switch – 2 position rocker (Chassis/Earth)
DUT power	85 V ac to 265 V ac, 16 A @ 120 V, 10 A @ 230 V
Physical size	90 mm x 180 mm x 38 mm (3.5 in x 6.2 in x 1.6 in)

### Included accessories

- 600/100 Chassis Cable, coil cord, 8 ft
- 600/101 Chassis Cable, coil cord, 16 ft
- 600/102 Chassis Ground Probe, 8 ft
- 600/215 Conductivity Cable – PCI
- 600/600 Soft Carrying Case (6 in x 10 in x 4 in)

### Ordering information

#### LT544DLITE Digital Safety Tester

- 2250751 United States, 85 V ac to 265 V ac, 50/60 Hz
- 2250805 Europe, 85 V ac to 265 V ac, 50/60 Hz
- 2250797 Australia, 85 V ac to 265 V ac, 50/60 Hz
- 2250810 Israel, 85 V ac to 265 V ac, 50/60 Hz
- 2250822 Italy, 85 V ac to 265 V ac, 50/60 Hz
- 2250831 Switzerland, 85 V ac to 265 V ac, 50/60 Hz
- 2250846 United Kingdom, 85 V ac to 265 V ac, 50/60 Hz

# LT544DPLUS

## Digital Safety Tester



This device is designed to perform simple electrical safety tests on any type of medical equipment, whenever patient lead testing is not required.

The rugged, hand-held instrument is built for quick and easy use. A simple selector knob controls the functions: Line Voltage, Instrument Current, Leakage Current and Chassis Resistance. Accurate test measurements are shown on the large display.

Heavy-duty switches change polarity, open and close the neutral and select Chassis or Earth Leakage Current measurements. A four-wire Kelvin bridge eliminates reading errors in resistance due to cable length and contact resistance. True-rms measurements are provided for all current readings. The AAMI test load is utilized.

### Key features

- Small, lightweight, self-contained portable instrument
- Universal power supply – input voltage from 85 V ac to 265 V ac
- Chassis resistance measurements are made with a four-wire Kelvin bridge to eliminate errors due to cable length
- Test method complies with AAMI load per ANSI/AAMI ES1-1993
- Leakage current can be measured in Open/Closed Neutral, Normal/Reversed Polarity and Open/Closed Ground
- All Leakage current measurements are displayed directly in  $\mu\text{A}$

## Specifications

Line voltage	
Range	85 V ac 265 V ac
Resolution	1 Volt
Accuracy	2 % R $\pm$ 1 LSD
Instrument current	
Range	0.0 A to 19.99 A
Resolution	10 mA
Accuracy	5 % R $\pm$ 1 LSD
Ground resistance	
Range	0 W 19.99 W
Accuracy	$\pm$ 1 % R, $\pm$ 1 LSD
Resolution	10 mW
Load current	
Range	0 A to 14.99 A (LT544Dplus – 1515) 0 A to 19.99 A (LT544Dplus – 2020) 0 A to 9.99 A (LT544Dplus – 230 V)
Accuracy	$\pm$ 4 % R, $\pm$ 1 LSD
Leakage current	
Range	0 $\mu\text{A}$ to 1,999 $\mu\text{A}$
Accuracy	DC and 25 Hz to 1 kHz: $\pm$ 1 % g, $\pm$ 3 LSD 1.0 KHz to 100 KHz: $\pm$ 2.5 % of reading, $\pm$ 3 LSD 100 KHz to 1 MHz: $\pm$ 5 % of reading, $\pm$ 3 LSD
Current capacity	LT544Dplus-1515: 15 A at 120 V ac LT544Dplus-230V: 10 A at 230 V ac LT544Dplus-2020: 20 A, at 120 V ac, 20 % duty cycle (2 minutes on, 8 minutes off)
Controls	1. Function Switch – 4 position rotary 2. Neutral Switch – 2 position rocker (Open/Closed) 3. Polarity Switch – 3 position rocker (Normal/Off/Reversed) 4. Leakage Switch – 2 position rocker (Chassis/Earth)
DUT power	85 V ac to 265 V ac, 16 A @ 120 V, 10 A @ 230 V
Power connectors	LT544Dplus – Standard US LT544Dplus-EUR – Schuko
Physical size	90 mm x 180 mm x 38 mm (3.5 in x 6.2 in x 1.6 in)

### Included accessories

- 600/100 Chassis Cable, coil cord, 8 ft
- 600/101 Chassis Cable, coil cord, 16 ft
- 600/102 Chassis Ground Probe, 8 ft
- 600/215 Conductivity Cable – PCI
- 600/600 Soft Carrying Case (6 in x 10 in x 4 in)

### Ordering information

#### LT544DPLUS Digital Safety Tester

- 2250854 United States, 85 V ac to 265 V ac, 50/60 Hz
- 2250893 Europe, 85 V ac to 265 V ac, 50/60 Hz
- 2250887 Australia, 85 V ac to 265 V ac, 50/60 Hz
- 2250902 Israel, 85 V ac to 265 V ac, 50/60 Hz
- 2250916 Italy, 85 V ac to 265 V ac, 50/60 Hz
- 2250925 Switzerland, 85 V ac to 265 V ac, 50/60 Hz
- 2250933 United Kingdom, 85 V ac to 265 V ac, 50/60 Hz

# ULT800

## Ultrasound Transducer Leakage Tester



ULT800 tests the electrical safety of ultrasound transducers independent of their ultrasound machines. A variety of adapters allow for testing of many different makes and models, including transesophageal echocardiography (TEE) transducers.

With the ULT800, transducer testing easily fits into routine disinfecting procedures. Technicians conduct the tests in a cleaning basin at the beginning of the day and between patients. Simple Pass/Fail indicators make it simple to use even non-technical medical personnel, such as sonographers and central sterile-supply technicians, can perform the tests.

The ULT800 is available by itself or as a kit, which includes two transducer adapters, a dual-conductivity electrode, and carrying case.

### Specifications

<b>Power</b>	9 V alkaline battery, approximately 1000 uses per battery
<b>Conductivity</b>	Limit to pass: > 133 $\mu$ A +1 %
<b>Leakage</b>	Limit to pass: < 185 $\mu$ A +1 %; > 20 $\mu$ A +1 %
<b>Dimensions (LxWxH)</b>	17 cm x 10 cm x 4 cm (6.5 in x 3.7 in x 1.5 in)
<b>Weight</b>	0.34 kg (0.75 lb)
<b>Operating temperature</b>	15 °C to 40 °C (59 °F to 104 °F)
<b>Storage temperature</b>	15 °C to 65 °C (59 °F to 149 °F)
<b>Humidity</b>	90 % max


### Optional accessories

**2392502** Dual Conductivity Electrode  
**2392525** Hard-sided Carrying Case  
**2392569** Dual Conductivity Electrode—for use with Cidex 2032 Tray  
**2801776** 600/220PLUS, Dual Conductivity Electrode for use with 800-Cleaning Tub,  
**2392533** Conductivity Adapter Cable for PCI GUS cleaning  
**2231616** Universal Ultrasound Probe for DALE601 and DALE601E  
**2392427** Chassis Ground Probe for DALE601/DALE601E  
**2392430** Acuson/Siemens ultrasound transducer adapter for Acuson 156 and V510B Transducers  
**2743055** 800-Cleaning Tub, Cleaning/Testing Basin for ULT800 Testing System  
**2392578** Acuson/Siemens Ultrasound Transducer Adapter for Acuson 260 Transducers  
**2392591** Acuson/Siemens Ultrasound Transducer Adapter for Acuson MP and 3V2c Transducers

**2392516** Acuson/Toshiba Ultrasound Transducer Adapter for Acuson XP, Acuson Aspen, Acuson Capasee, Acuson 3-Needle Guide C3, ATL 3.5 DFT, Toshiba PSF-37HT, and Toshiba F Series Transducers  
**2392482** HP/Agilent Ultrasound Transducer Adapter (600/210)  
**2392494** HP/Agilent Ultrasound Transducer Adapter (600/211)  
**2392475** GE LogiQ Ultrasound Transducer Adapter (600/204)  
**2231602** GE LogiQ Ultrasound Transducer Adapter (600/205)  
**2392453** GE YMS/RT Ultrasound Transducer Adapter for GE YMS/RT Transducers  
**2392466** GE CGR Ultrasound Transducer Adapter for GE CGR radius and GE SONO Transducers  
**2392557** Philips Ultrasound Transducer Adapter (ATL/600/218)  
**800/PHILIPS-04** Ultrasound Transducer Adapter (for use with Philips iE33 and iU22 diagnostic ultrasound TEE transducers)  
**2540999** SonoSite TEE Ultrasound Transducer Adapter (for use with all SonoSite Transducers—including TEE)

### Key features

- Handheld
- Stand-alone operation
- Direct measurement of leakage current
- Battery-operated
- Independent of 120 V or 240 V systems
- Built-in self-test circuit
- Auto shut-off to conserve battery

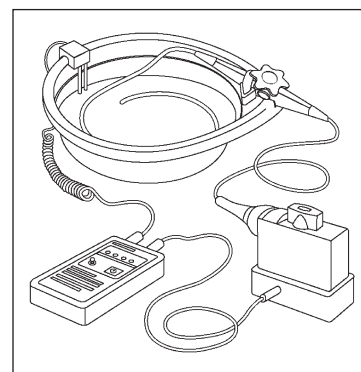

ULT800 Ultrasound Electrical Leakage testing system (TEE transducer not included)

### Ordering information

**2434187** ULT800 Ultrasound Transducer Leakage Tester Kits  
**2491569** Cust1 Ultrasound Transducer Leakage Tester Kit  
Standard accessories: ULT800 (2491569), dual-conductivity electrode (2392502), and hard-sided carrying case (2392525)  
**2491578** Cust2 Ultrasound Transducer Leakage Tester Kit  
Standard accessories: ULT800 (2491569), 800-Cleaning Tub, Cleaning/Testing Basin for ULT800 Testing System (2743055, includes foam, Velcro strap, and shipping container), 600/220PLUS, Dual conductivity electrode for use with 800-Cleaning Tub, Cleaning/Testing Basin for ULT800 Testing System (2801776)



# BP Pump 2

## Non-Invasive Blood Pressure Simulator



Ansur  
plug-in

The BP Pump 2 is a second-generation non-invasive blood pressure (NIBP) monitor analyzer that efficiently verifies oscillometric adult and neonatal NIBP. The BP Pump 2's unique feature set includes tests to accurately interrogate wrist-cuff monitors, internal cuff volumes, and optional 5-lead synchronized ECG simulations for spot checks on the

monitor. The simulated peripheral pulse is synchronized with this electrical ECG signal for testing NIBP monitors utilizing gated measurement for noise/artifact rejection.



### Key features

- Dynamic BP simulators for arm- and wrist-cuff monitors
- ECG and arrhythmia simulation synchronized with BP (optional)
- Internal pump for high- and low-pressure release verification, leak testing, and pressure sourcing
- Internal adult/neonatal cuffs eliminates need for external cuffs
- Four respiratory artifacts, including spontaneous breathing and controlled ventilation
- Multiple arrhythmia simulations, including premature atrial contractions #1 and #2, atrial fibrillation, and PVCs
- Optional Ansur test automation software to standardize testing procedures, capture waveforms, and print and document test result

### Specifications

Pressure generation/measurement	Static-pressure range: 0 mmHg to 400 mmHg (53 kPa)			
	Difference between target pressure and actual pressure: -5 mmHg			
	Internal leak rate: < 2 mmHg per minute with minimum volume of 300 cc			
Four respiratory artifacts	3 spontaneous breathing; controlled ventilation			
Three adult wrist-cuff simulations	Normal, Hyper, Hypo			
Pressure source	Specified pressure generated from 50 mmHg to 400 mmHg in selectable increments of 1 mmHg			
Pressure gauge	Static pressure measured from 0 mmHg to 400 mmHg at the pressure port			
Pressure relief test	Test for the NIBPM pressure relief valve (0 mmHg to 400 mmHg) with display of peak pressure			
Neonate internal cuff simulations	Internal neonate cuff; four standard neonate pressures			
Neonate simulations	Cuff #1:	Blood pressure: 35/15	Heart rate: 120 BPM	Pulse volume: 0.3
	Cuff #2:	Blood pressure: 60/30	Heart rate: 120 BPM	Pulse volume: 0.3
	Cuff #3:	Blood pressure: 80/50	Heart rate: 120 BPM	Pulse volume: 0.3
	Cuff #4:	Blood pressure: 100/70	Heart rate: 120 BPM	Pulse volume: 0.3
Irregular pulse	BP and ECG: Premature atrial contractions # 1, premature atrial contractions # 2, premature ventricular contractions, atrial fibrillation and PVCs			
User-definable simulations	User-definable systolic and diastolic values, along with heart rate and pulse volume			
	Ranges: Systolic pressure range      Diastolic pressure range      Heart rate      Pulse volume 20 mmHg to 250 mmHg      10 mmHg to 200 mmHg      30 BPM to 250 BPM      0.1 cc to 2.4 cc in increments of 0.1 cc			
Simulation parameters performance	Max pulse volume: 2.4 cc			
	Max heart rate: 200 BPM at 2.4 cc pulse volume; 250 BPM at 1.2 cc pulse volume			
	Internal neonatal cuff volume: 20 cc			
	Internal adult cuff volume (including NN volume): 310 cc			
	Heart rate setting accuracy: $\pm 1$ BPM			
Pressure leak test	Simulation units: kPa and mmHg (user selectable)			
	The pressure port is pressurized from 0 mmHg to 400 mmHg and keeps track of the pressure loss over time. Peak pressure and present pressure are displayed at all times; leak rate is displayed when it is available.			
Autosequences	Nine autosequences are provided for four tests and up to five simulations			
Electrical ECG (optional)	Signals: RA, LA, RL, LL, V			
	Waveform: Lead II			
	Amplitude: 1 mV peak ( $\pm 10$ %) NIBP peripheral pulse synchronized with ECG signal			
	Connections: Optional external ECG adapter, physiological synchronization with NIBP			
Heart rate for NIBP simulations	Heart rate accuracy: $\pm 1$ BPM Except for the following: Patient condition weak pulse, tachycardia, obese, geriatric: $\pm 1$ % $\pm 1$ BPM Patient condition mild exercise: $\pm 1.5$ % $\pm 1$ BPM Patient condition strenuous exercise: $\pm 3$ % $\pm 1$ BPM			

# BP Pump 2

## Non-Invasive Blood Pressure Simulator

<b>Serial port</b>	Bidirectional RS-232 port; baud rate of 9600 with no parity, one stop bit, and eight data bits																																		
<b>Pressure measurement</b>	Pressure-measurement units: kPa, mmHg, cmH2O, cmH2O and psi (user selectable) Range: 0 mmHg to 400 mmHg																																		
<b>Accuracy</b>	Basic model (BP Pump 2 <sub>L</sub> ): 0 mmHg to 300 mmHg: + 0.5 % of reading + 1 mmHg; 301 mmHg to 400 mmHg: + 2 % of reading High-accuracy version (BP Pump 2 <sub>M</sub> ): < 0.8 mmHg (0.1 kPa) throughout range																																		
<b>Parallel port</b>	25-pin female connector, with D-subminiature style and pinouts conforming to IBM PC printer port (unidirectional), HP and ASCII printers																																		
<b>Sample adult arm-cuff simulation (standard parameters)</b>	<table> <tr> <td colspan="2">Standard set of blood pressures:</td><td></td><td></td></tr> <tr> <td>BP #1:</td><td>Blood pressure: 120/80 (93)</td><td>Heart rate: 80</td><td>Pulse volume: 0.68 cc</td></tr> <tr> <td>BP #2:</td><td>Blood pressure: 150/100 (116)</td><td>Heart rate: 80</td><td>Pulse volume: 0.65 cc</td></tr> <tr> <td>BP #3:</td><td>Blood pressure: 200/150 (166)</td><td>Heart rate: 80</td><td>Pulse volume: 0.6 cc</td></tr> <tr> <td>BP #4:</td><td>Blood pressure: 255/195 (215)</td><td>Heart rate: 80</td><td>Pulse volume: 0.55 cc</td></tr> <tr> <td>BP #5:</td><td>Blood pressure: 60/30 (40)</td><td>Heart rate: 80</td><td>Pulse volume: 0.75 cc</td></tr> <tr> <td>BP #6:</td><td>Blood pressure: 80/50 (60)</td><td>Heart rate: 80</td><td>Pulse volume: 0.7 cc</td></tr> <tr> <td>BP #7:</td><td>Blood Pressure: 100/65 (76)</td><td>Heart rate: 80</td><td>Pulse volume: 0.69 cc</td></tr> </table>			Standard set of blood pressures:				BP #1:	Blood pressure: 120/80 (93)	Heart rate: 80	Pulse volume: 0.68 cc	BP #2:	Blood pressure: 150/100 (116)	Heart rate: 80	Pulse volume: 0.65 cc	BP #3:	Blood pressure: 200/150 (166)	Heart rate: 80	Pulse volume: 0.6 cc	BP #4:	Blood pressure: 255/195 (215)	Heart rate: 80	Pulse volume: 0.55 cc	BP #5:	Blood pressure: 60/30 (40)	Heart rate: 80	Pulse volume: 0.75 cc	BP #6:	Blood pressure: 80/50 (60)	Heart rate: 80	Pulse volume: 0.7 cc	BP #7:	Blood Pressure: 100/65 (76)	Heart rate: 80	Pulse volume: 0.69 cc
Standard set of blood pressures:																																			
BP #1:	Blood pressure: 120/80 (93)	Heart rate: 80	Pulse volume: 0.68 cc																																
BP #2:	Blood pressure: 150/100 (116)	Heart rate: 80	Pulse volume: 0.65 cc																																
BP #3:	Blood pressure: 200/150 (166)	Heart rate: 80	Pulse volume: 0.6 cc																																
BP #4:	Blood pressure: 255/195 (215)	Heart rate: 80	Pulse volume: 0.55 cc																																
BP #5:	Blood pressure: 60/30 (40)	Heart rate: 80	Pulse volume: 0.75 cc																																
BP #6:	Blood pressure: 80/50 (60)	Heart rate: 80	Pulse volume: 0.7 cc																																
BP #7:	Blood Pressure: 100/65 (76)	Heart rate: 80	Pulse volume: 0.69 cc																																
<b>Patient condition simulations</b>	Healthy heart, weak pulse, mild exercise #1, strenuous exercise #2, obese subject, geriatric subject, tachycardia, bradycardia																																		
<b>Arrhythmia simulations</b>	Premature atrial cont. #1, premature atrial cont. #2, premature ventricular cont., atrial fib and PVCs																																		
<b>Wrist simulations</b>	<table> <tr> <td>Simulation #1:</td><td>Blood pressure 120/80 (93)</td><td>Heart rate: 80 BPM</td><td>Pulse volume: 0.5 cc</td></tr> <tr> <td>Simulation #2:</td><td>Blood pressure 160/100 (120)</td><td>Heart rate: 80 BPM</td><td>Pulse volume: 0.5 cc</td></tr> <tr> <td>Simulation #3:</td><td>Blood pressure: 80/55 (63)</td><td>Heart rate: 80 BPM</td><td>Pulse volume: 0.5 cc</td></tr> </table>			Simulation #1:	Blood pressure 120/80 (93)	Heart rate: 80 BPM	Pulse volume: 0.5 cc	Simulation #2:	Blood pressure 160/100 (120)	Heart rate: 80 BPM	Pulse volume: 0.5 cc	Simulation #3:	Blood pressure: 80/55 (63)	Heart rate: 80 BPM	Pulse volume: 0.5 cc																				
Simulation #1:	Blood pressure 120/80 (93)	Heart rate: 80 BPM	Pulse volume: 0.5 cc																																
Simulation #2:	Blood pressure 160/100 (120)	Heart rate: 80 BPM	Pulse volume: 0.5 cc																																
Simulation #3:	Blood pressure: 80/55 (63)	Heart rate: 80 BPM	Pulse volume: 0.5 cc																																
<b>Temperature</b>	Operating: 15 °C to 40 °C (59 °F to 104 °F) Storage: -20 °C to 65 °C (-4 °F to 149 °F)																																		
<b>Display</b>	Bright, large 4-line x 40-character alphanumeric display with backlighting																																		
<b>Dimensions (WxDxH)</b>	25.4 cm x 25.4 cm x 12.7 cm (10 in x 10 in x 5 in)																																		
<b>Weight</b>	3.4 kg (7.5 lb)																																		

### Optional accessories

**2755836** Ansur BP Pump 2 Plug-in

**2222822** Soft-sided Vinyl Carrying Case

**2391894** ECG Adapter Block (allows simulation of 5-lead ECG waveforms)

**2248899** Printer, Seiko DPU-414-30 B, 120 V power supply

**2399531** Printer, Seiko DPU-414-30B, 200 V power supply

**2238659** Serial Cable, D9M-D9F

**2392328** Neonatal/external cuff mandrel (truncated plastic cylinder diameters: 7.6, 10, and 14 cm)

**2391875** Wrist cuff mandrel (adult)

### Included accessories

**2391882** Accessory Kit (tubings and fittings)

Users Manual

XXXXXXX Power Cord (country specific)

### Ordering information

**BP Pump 2<sub>L</sub> (standard pressure transducer)**

**2249036** United States, 120 V

**2394895** Australia, 250 V

**2394901** Denmark, 250 V

**2394912** Schuko, 250 V

**2394920** Israel, 250 V

**2394935** Italy, 250 V

**2394947** India, 250 V

**2394958** Switzerland, 250 V

**2394964** United Kingdom, 250 V

**3334821** US 120V w/Test Automation

**3334839** AUS w/Test Automation

**3334842** DEN w/Test Automation

**3334856** SHK w/Test Automation

**3334863** ISR w/Test Automation

**3334874** ITAL w/Test Automation

**3334888** IND w/Test Automation

**3334895** SWZ w/Test Automation

**3334901** UK w/Test Automation

### BP Pump 2<sub>M</sub> (high-accuracy pressure transducer)

**2249049** United States, 120 V

**2394973** Australia, 250 V

**2394986** Denmark, 250 V

**2394999** Schuko, 250 V

**2395003** Israel, 250 V

**2395015** Italy, 250 V

**2395026** India, 250 V

**2395032** Switzerland, 250 V

**2395044** United Kingdom, 250 V

**3334912** US w/Test Automation

**3334920** AUS w/Test Automation

**3334935** DEN w/Test Automation

**3334947** SHK w/Test Automation

**3334958** ISR w/Test Automation

**3334964** ITAL w/Test Automation

**3334973** IND w/Test Automation

**3334986** SWZ w/Test Automation

**3334999** UK w/Test Automation

# CuffLink

## Non-Invasive Blood Pressure Simulator



The CuffLink Non-Invasive Blood Pressure (NIBP) Analyzer offers a quick, reliable, and consistent way to evaluate the operation and performance of oscillometric NIBP signals.

With user-programmable selections, the CuffLink will simulate the full range or normal, hypertensive, and hypotensive dynamic NIBP waveforms representing typical adult, infant, and neonatal patients. The analyzer can also generate normal, bradycardia, and tachycardia rhythm selections with a wide range

of weak, normal, and strong peripheral pulses. A variety of parameters allow creation and storage of five custom autosequences within the unit. In addition to the programmable blood-pressure target values, these autosequences can include static pressure, leak, and over-pressure relief valve pop-off tests.

## Specifications

<b>Power</b>	120/250 V ac, 50 $\Omega$ average, 100 $\Omega$ peak, 50/60 Hz
<b>Analog outputs</b>	Cuff pressure: 0 mmHg to 499.95 mmHg FS $\pm 1\%$ of reading, 10 mV/mmHg Pulse pressure: 0 mmHg to 5 mmHg FS $\pm 1\%$ of reading, 1 V/mmHg
<b>Digital manometer</b>	Pressure: -499.75 mmHg to 499.75 mmHg Measurement parameters: instantaneous and peak
<b>Displayed graphics</b>	Dynamic real-time NIBP cuff-pressure waveform programmed peripheral pulse and envelope waveforms
<b>Display</b>	Alphanumeric graphic display (LCD) Alphanumeric mode: 8 lines x 40 characters Graphics mode: 64 vertical x 240 horizontal dot matrix, backlight with viewing angle adjustment
<b>Digital interfaces</b>	RS-232/serial: bidirectional: downloads cuff measurement data and controls test features with a compatible computer or via the medTester 5000C with the medCheck option. Parallel printer: Centronics compatible Pulse sync: 0 V dc to 5 V dc (TTL)
<b>Cuff mandrel</b>	Interlocking plastic blocks: four cuff circumferences, including 39.5 cm (large adult), 33 cm (adult), 26.6 cm (small adult) and 20 cm (child); maximum cuff: 15.25 cm Truncated plastic cylinders: three neonatal cuff circumferences, including 14 cm, 10 cm, and 7.6 cm; maximum cuff width of 7.6 cm
<b>Pop-off valve testing</b>	Automatic test for operation of the monitor's relief valve Measurement parameters: instantaneous and peak pressure Maximum pressure: 499.75 mmHg
<b>System leak testing</b>	Start pressure: 499.75 mmHg max Elapsed time: 60 s (fixed) Leak-rate range: 0.25 mmHg/min to 499.75 mmHg/min Pump: 2 liters/minute minimum (free flow)
<b>Accuracy</b>	Dynamic NIBP Response Repeatability (Systolic/Diastolic/Mean): 1 % of target value Cuff pressure: $\pm 1\%$ of reading $\pm 1$ mmHg Input overpressure limit: $\pm 1500$ mmHg

## Key features

- Dynamic oscillometric non-invasive blood-pressure simulation
- Automated static-pressure measurements, leakage testing, and relief-valve testing
- Five automated NIBP testing autosequences
- Five arrhythmia selections
- Adult and neonatal NIBP selections
- Adjustable heart rate values
- Direct interface with medTester 5000C



CuffLink standard accessories

# CuffLink

## Non-Invasive Blood Pressure Simulator

### Specifications

<b>Autosequences</b>	Up to five user-programmable sequences to test NIBP monitors with a specific series of cuffLink performance tests, including static pressure test, leak test, and pop-off test
	Up to eight adult-neonatal-arrhythmia dynamic NIBP selections, each of which can be cycled up to 99 times during the sequence
	Printable test report
<b>Displayed real-time parameters</b>	Instantaneous cuff pressure: 0 mmHg to 300 mmHg Peak cuff pressure: 0 mmHg to 500 mmHg peak Inflate/deflate time: 0.1 s to 999.9 s Inflate/deflate rate: 0.1 mmHg/s to 999.9 mmHg/s Total measurement time: 0 s to 999.9 s max
	<b>Selected heart rate:</b> Selected systolic/diastolic (mean) target values User-programmed vertical and horizontal shifts
<b>Dynamic non-invasive blood pressure</b>	Simulation of a range of normal, hypertensive and hypotensive dynamic noninvasive blood pressures for typical adult, infant, and neonatal patients. Generation of normal, bradycardia, and tachycardia rhythm selections with a wide range of user-programmable peripheral pulse amplitudes (weak, normal and strong). Compatible with oscillometric NIBP devices.
	Preprogrammed target value selections: Adult systolic/diastolic (MAP) (mmHg): 60/30 (40), 80/50 (62), 100/65 (75), 120/80 (90), 150/100 (115), 200/150 (165) and 255/195 (215)
	Neonatal/pediatric systolic/diastolic: above selections, excluding 255/195 and 200/150
	Repeatability: $\pm 1\%$ of selected target value
	<b>Adult arrhythmia selections:</b> • Baseline NIBP target value: (120/80) (NSR) • Atrial fibrillation (A-Fib) • Premature atrial contraction (PAC) • Premature ventricular contraction (PVC) • Missed beat (MB) • Aberrant sinus conduction (AS)
	<b>Preprogrammed peripheral pulse waveforms:</b> • Pulse amplitude at MAP: 2 mmHg (typical adult value) • Pulse volume range: 0 ml to 5.1 ml • Pulse rise time: 80 ms (min) • Heart rates (adult and neonate): 30 BPM, 40 BPM, 60 BPM, 80 BPM, 120 BPM, 160 BPM, 200 BPM, and 240 BPM • Heart-rate accuracy: $\pm 1\%$ of selected rate
	<b>Pre-programmable target value shifts:</b> Horizontal axis: preprogrammed target value selections shifted in 1.0 mmHg steps over a maximum range of $\pm 300$ mmHg to increase or decrease dynamic pressure values Vertical axis: relative amplitude shifted in 1 % increments over a maximum range from 0 % to 200 % to simulate weak, normal, and strong peripheral pulses
<b>Environmental</b>	Operating temperature: 15 °C to 35 °C (59 °F to 95 °F)
	Storage temperature: 0 °C to 50 °C (32 °F to 122 °F)
<b>Dimensions (LxWxH)</b>	38.1 cm x 31.75 cm x 12.7 cm (15 in x 12.5 in x 5 in)
<b>Weight</b>	6.82 kg (15 lb)

### Product comparison chart

Model	BP Pump 2	CuffLink
Wrist cuff simulations	Yes	No
ECG synchronized	Option	No
Leak test	Yes	Yes
Over pressure test	Yes	Yes
Manometer	Yes	Yes
medTester compatible	No	Yes

### Included accessories

**2242915** Operator's Manual  
**2392381** Adult Cuff Mandrel Spacer Blocks  
**2230305** Adult Cuff Mandrel End Blocks (qty 2)  
**2392328** External Cuff Mandrel Neonatal (truncated plastic cylinder diameters: 7, 6, 10, and 14 cm)  
**2245300** CuffLink Adapter Kit  
**2198846** Hospital Grade Power Cord Set  
**2248408** Soft Vinyl Accessory Pouch

### Ordering information

**CuffLink Non-Invasive Blood Pressure Simulator**  
**2246985** United States, 120 V  
**2399820** Australia, 250 V  
**2399835** Denmark, 250 V  
**2399873** India, 250 V  
**2399858** Israel, 250 V  
**2399864** Italy, 250 V  
**2399847** Schuko, 250 V  
**2399886** Switzerland, 250 V  
**2399899** United Kingdom, 250 V



## MPS450

## Patient Simulator



The MPS450 is Fluke Biomedical's next-generation, portable, multiparameter patient simulator for your comprehensive testing and training needs. Whether it's a quick check on a bedside monitor, arrhythmia recognition training, or performing a complete PM on the latest patient-monitoring systems, this simulator is a clear choice with its broad range of physiological waveforms, easy-to-use interface, and compact, portable size.

## Key features

- 12-lead ECG simulation with independent outputs
- 43 arrhythmia selections
- Four invasive BP channels, including Swan-Ganz simulation
- Respiration and temperature simulations
- ECG performance testing, including R-Wave detection
- Large, bright 4-line x 20-character display
- RS-232 serial port
- Expansion port
- Compact and lightweight

## Specifications

ECG normal sinus rhythm	12-lead configuration with independent outputs
	Amplitude: 0.05 mV to 5.5 mV
	Rates: 30 BPM to 300 BPM
	ECG waveform selections: Adult or pediatric
	Superimposed artifact: 50 Hz and 60 Hz, muscle, baseline wander, respiration
ECG performance	Amplitude: 0.05 mV to 5.5 mV Square wave: 2 Hz, 0.125 Hz Pulse: 30 BPM, 60 BPM, 60 ms pulse width Sine waves: 0.5 Hz to 100 Hz Triangle wave: 2 Hz, 2.5 Hz
ST segments	Elevated/depressed: -0.8 mV to 0.8 mV in 0.1 mV steps; plus -0.05 mV and 0.05 mV steps
Accuracy	All amplitudes $\pm 2\%$ of setting Lead II All rates $\pm 1\%$ All widths $\pm 1\%$
Arrhythmia selections (43 Total)	Premature rhythms Supraventricular rhythms Ventricular rhythms Conduction defects Pacemaker
Respiration	Baseline impedance: 500 $\Omega$ to 2000 $\Omega$ , leads I, II, III Impedance variations: 3 $\Omega$ , 1 $\Omega$ , 0.5 $\Omega$ , 0.2 $\Omega$ Rates: 15 BrPM to 120 BrPM and APNEA Apnea periods: 12 seconds, 22 seconds, 32 seconds, and continuous



MPS450 optional accessories



## Product comparison chart

Model	MPS450	medSim 300B	PS420	PS415
Arrhythmia selections	43	32	35	14
Respiration	Yes	Yes	Yes	Yes
BP channels	Yes, four	Yes, four	Yes, two	Yes, two
Swan-Ganz procedure	Yes	Yes	Yes	Yes
Temperature channels	Yes, one	Yes, two	Yes, one	Yes, one
User-programmable auto-sequences	Yes (with HHC3)	Yes, internal feature plus HHC3 capability	No	Yes
Cardiac output	Optional	Optional	Standard	No

# MPS450

## Patient Simulator

### Specifications

<b>Blood pressure channels</b>	<b>Channels</b> 4; synchronized with normal sinus rhythm rates; tracks arrhythmia activity
	<b>Transducer</b> Exciter voltages: ac and dc compatible Sensitivity: 5 $\mu$ V/V/mmHg and 40 $\mu$ V/V/mmHg Calibrated Rate: 80 BPM
<b>Available selections</b>	Static pressure
	Dynamic pressure: Art (120/80), Radial Art (120/80), LV (120/0), RA/CVP (15/10), RV (25/0), PA (25/10), PAW (10/2), and LA (14/4)
	Swan-Ganz procedure: automated and manual control
<b>Temperatures</b>	0 °C, 24 °C, 37 °C, and 40 °C
<b>Cardiac output (optional)</b>	Faulty-injectate curve Left-to-right shunt curve C.O. for 0°: 2.5 l/min, 5 l/min, and 10 l/min C.O. for 24°: 2.5 l/min, 5 l/min, and 10 l/min Cal Pulse: 1.5° for 1 second
<b>Fetal/Maternal ECG and IUP simulations (optional)</b>	Fixed fetal heart rates: 60 BPM to 240 BPM
	Dynamic fetal heart activity: Uniform deceleration, uniform acceleration, early deceleration, late deceleration
	Maternal heart rate: 80 BPM
	Dynamic intrauterine pressure (IUP)
	Waveform: positive bell-shaped pressure curve
	Peak pressure: 90 mmHg, $\pm$ 4 mmHg (max)
	Contraction interval: 2 minutes, 3 minutes, and 5 minutes (manual)
<b>Dimensions (WxDxH)</b>	18.4 cm x 19 cm x 5 cm (7.3 in x 7.5 in x 2 in)
<b>Weight</b>	0.6 kg (1.4 lb)

Model	PS410	PS400	DataSim 6100
Arrhythmia selections	35	12	34
Respiration	No	No	Yes
BP channels	No	No	Yes, three
Swan-Ganz procedure	No	No	Yes
Temperature channels	No	No	No
User-programmable auto-sequences	No	No	Yes
Cardiac output	No	No	Optional

#### Optional accessories

**2248623** Soft-Sided Vinyl Carrying Case  
**2238659** Serial Cable D9M-D9F  
**2226608** Cardiac-Output Adapter Box  
**2645641** HHC3 Handheld Controller

#### Cardiac output adapters

**2392285** GE Medical/Marquette Cardiac Output Cable (interface cable for GE Medical/Marquette plus monitors, including in-line switch box to select injectate temperature)  
**2227016** Gould/Spectramed 1445 Injectate Temperature Adapter (4 pin)

**2227025** Gould/Spectramed 1465 Injectate Temperature Adapter (phone jack)  
**2226973** HP Injectate Temperature Adapter (1/4 in phone plug)  
**2391990** Universal Injectate Temperature Adapter Pigtail (unterminated)  
**2392158** General Purpose Connector

For a complete list of temperature and blood-pressure cables, contact us.

#### Included accessories

**2720054** AC Battery Eliminator  
**2243350** Users Manual

#### Ordering information

**2251364** MPS450 (ECG 12-lead simulation; invasive BP; respiration; temperature; BP in sync with ECG; large, bright 4-line x 20-character display; R-wave-detection test; RS-232 port for computer control; soft-key navigation; universal ECG connectors; and flash memory for easy program upgrade)

**2251373** MPS450-CO (base model plus cardiac-output simulation)

**2251399** MPS450-FET (base model plus direct fetal/maternal ECG simulations with maternal heart rate, selectable fetal heart rate, and dynamic intrauterine pressure waveform [IUP])

**2251386** MPS450-CO/FET (base model plus cardiac-output simulation and direct fetal/maternal ECG simulations with maternal heart rate, selectable fetal heart rate, and dynamic intrauterine pressure waveform [IUP])

# medSim 300B

## Patient Simulator



If your physiological-monitor testing requirements call for a full-featured, comprehensive instrument, the medSim 300B is your answer. Used by thousands of biomedical departments and many medical-device manufacturers around the world, this simulator delivers an entire array of parameters with ultimate flexibility.

### Key features

- 12-lead ECG simulation with independent output
- Four invasive BP channels including Swan-Ganz simulation
- Respiration and temperature
- 9 V dc battery and lead test
- ECG-performance testing including R-Wave detection
- Interactive defibrillation training
- 2-line x 20-character display
- RS-232 serial port

## Specifications

<b>Arrhythmia selections</b>	Supraventricular, premature, conduction, ventricular, and transvenous pacemaker
<b>Programmable sequences</b>	15 preprogrammed selections or user programmable
<b>ECG parameters</b>	Normal sinus rhythm Performance ST segments Arrhythmia selections
<b>medSim 300B option 1</b>	Fetal/maternal ECG and IUP Intra-aortic balloon assist pump Cardiac catheterization Cardiac Output Option Flow rates: 3 lpm to 7 lpm Curves: Normal, interrupt, slow, L/R shunt Trends: Avg = 5 l/min
<b>Controller option</b>	Direct waveform access
<b>Premature beat selections</b>	Manual: Push button insertions of one PVC, PAC, or PNC Automated: User-programmable PVC activity PVC types: 4 LV and RV foci PVC timing: Standard, early, and R-on-T PVC rate: 0 to 25/min or automated PVC-rate variance
<b>Pacemaker</b>	Amplitude: -700 mV to 700 mV Width: 0.1 ms to 2 ms
<b>Defibrillator training</b>	Three scenarios available

# medSim 300B

## Patient Simulator

### Specifications

<b>Blood pressure channels</b>	<b>Channels</b> Four synchronized with normal sinus rhythm rates; tracks arrhythmia activity
	<b>Transducer</b> Exciter voltages: ac and dc compatible Sensitivity: 5 $\mu$ V/V/mmHg and 40 $\mu$ V/V/mmHg Calibrated rate: 80 BPM
<b>Available selections</b>	Static pressure
	Dynamic pressure: Art (120/80), LV (120/0), RA/CVP (15/10), RV (25/0), PA (25/10), PAW (10/2)
	Swan-Ganz procedure (manual)
	Triangle wave
<b>Respiration</b>	Normal physiological simulation Baseline impedance: 500 $\Omega$ to 2000 $\Omega$ Impedance variations: 0 $\Omega$ to 3 $\Omega$ Rates: 15 BrPM to 120 BrPM Apnea: Off, momentary, continuous, timed (12 sec and 32 sec)
<b>Auxiliary features</b>	I/E Ratio: 5/1, 4/1, 3/1, 2/1, 1/1
	Baseline shift: Delta impedance is reduced to 1/6 and shifted either positive or negative. The rate is changed to 120 BrPM for 12 sec/min.
	Ventilator simulation: 40 BrPM at fixed ratio
<b>Artifact</b>	ECG: 50 Hz, 60 Hz, muscle, and baseline wander. All or single leads. BP/respiration: Two pressure values
<b>Temperature</b>	Channel 1: Fixed at 37 °C (98.6 °F) Channel 2: 34 °C (86 °F), 37 °C (98.6 °F), 40 °C (104 °F) Hypothermia, hyperthermia, and spike
<b>Power</b>	Two 9 V dc alkaline batteries, battery eliminator
<b>Dimensions (WxDxH)</b>	17.8 cm x 25.4 cm x 7.6 cm (7 in x 10 in x 3 in)
<b>Weight</b>	1.6 kg (3.5 lb)

### Optional accessories

**2248554** Multipurpose Hard-sided Watertight Carrying Case

**2199070** PC remote control interface cable (right-angle DIN to female DB25)

**2199225** Patient Simulator to medTester interface cable (right-angle DIN to female DB25)

**2199747** DS-A Datascope System 9 (DS-1 BP cable required) intra-aortic balloon assist sync cable

**2199786** KT-A Kontron K200, KAAT (KT-1 BP cable required) intra-aortic balloon assist sync cable

**2645641** HHC3 Handheld Controller

For a complete list of cardiac adapters, temperature and blood-pressure cables, contact us.



# PS420

## Patient Simulator



The PS420 is a handheld, high-performance simulator for testing patient monitors.

Small enough to fit in a pocket, the handy PS420 features a wide variety of simulation capability, including a full range of ECG, respiration, blood pressure, temperature and cardiac output conditions. The tool includes 12-lead ECG, two-channel blood pressure simulation, 35 arrhythmia selections, pacemaker simulation as well as adult and pediatric normal sinus rhythms.

For convenient use, labeled hot keys on the keypad guide users to the most common settings.

### Key features

- Compact, lightweight, pocket size
- Labeled hot keys for common settings
- 12-lead ECG
- Respiration and temperature selection
- Two-channel blood pressure simulation
- Optional cardiac output
- Adult and pediatric normal sinus rhythms
- 35 arrhythmia selections
- ECG performance waveforms
- ST segment levels
- ECG artifact
- Pacemaker simulation
- RS-232 serial port for computer control
- Battery operated

## Specifications

ECG	
Normal rate	80 BPM
Selectable rates	30 BPM, 40 BPM, 60 BPM, 80 BPM, 100 BPM, 120 BPM, 140 BPM, 160 BPM, 180 BPM, 200 BPM, 220 BPM, 240 BPM, 260 BPM, 280 BPM, and 300 BPM
Accuracy	± 1 %
Output impedance	500 Ω, 1000 Ω, 1500 Ω, and 2000 Ω for leads I, II, and III
ECG amplitudes	0.5 mV, 1 mV, 1.5 mV, and 2 mV
Amplitude accuracy	± 2 % lead II
Adult or pediatric ECG waveform performance waveform	
Lead II square wave	2 Hz, 0.125 Hz
Pulse	30 BPM and 60 BPM, 60 ms pulse width
Sine wave	0.5 Hz, 4 Hz, 10 Hz, 40 Hz, 50 Hz, and 60 Hz (1 mV amplitude, lead II)
Triangle wave	2 Hz
ST segment analysis	
Elevated or depressed	-0.8 mV to +0.8 mV in 0.1 mV steps
Pacemaker	
Pacer spike	Amplitude: 2 mV, 4 mV, 8 mV, and 10 mV in lead II Accuracy: ± 5 %, Lead II
Pacer spike	Duration: 0.1 ms, 0.5 ms, 1 ms, 1.5 ms, and 2 ms Accuracy: ± 5 %
Functions	Asynchronous pacemaker Pacer non-function Pacer non-capture Demand occasional sinus Demand frequent sinus AV sequential

# PS420

## Patient Simulator

### Specifications

Blood pressure	
Input/output impedance	350 $\Omega$
Exciter input limit	$\pm 10$ V
Exciter input frequency range	DC to 4000 Hz
Transducer sensitivity	5 $\mu$ V/V/mmHg or 40 $\mu$ V/V/mmHg
Level accuracy	$\pm 1$ %, $\pm 1$ mmHg
Static levels BP1	-10 mmHg, 0 mmHg, 50 mmHg, 100 mmHg, 150 mmHg, 200 mmHg, and 250 mmHg
Static levels BP2	-10 mmHg, 0 mmHg, 80 mmHg, 160 mmHg, 240 mmHg, 320 mmHg, and 400 mmHg
Channel selections:	Arterial 120/80, channel 1 and 2 Radial artery 120/80, channel 1 and 2 Left ventricle 120/00, channel 1 and 2 Right ventricle 25/00, channel 1 and 2 Central venous 15/10, channel 2 Pulmonary artery 25/10, channel 2 Pulmonary wedge 10/2, channel 2 Left atrium 14/4; automatic Swan/Ganz (every 20 sec) Manual swan/ganz (changes when entry is selected), channel 2 Synchronized with all normal sinus rates. Physiologically track all arrhythmia selection
Cardiac output (must have optional cardiac output adapter box p/n 2462200)	
Catheter type	Baxter edwards, 10 cc
Blood temperature	37 °C (98.6 °F) CO for 2 °C (35.6 °F): 3, 5, 7 l/min CO for 20 °C (68 °F): 3, 5, 7 l/min
Cal pulse	Of 1 °C for 1 sec; of Delta 402 $\Omega$ for 4 sec.
Computational constant	For 2 °C (35.6 °F) is 0.561; for 20 °C (68 °F) is 0.608
Left to right shunt	2 °C and 20 °C (35.6 °F and 68 °F)
Faulty injectate	2 °C and 20 °C (35.6 °F and 68 °F)
Accuracy	$\pm 5$ % Calibrated or uncalibrated cardiac output waves for 4 different CO values
Respiration	
Baseline impedance	500 $\Omega$ , 1000 $\Omega$ , 1500 $\Omega$ , and 2000 $\Omega$ , leads I, II, and III
Lead selections	LL or LA
Impedance variations	3 $\Omega$ , 1 $\Omega$ , 0.5 $\Omega$ , and 0.2 $\Omega$
Accuracy	$\pm 5$ %
Rates	15 BPM, 20 BPM, 30 BPM, 40 BPM, 60 BPM, 80 BPM, 100 BPM, 120 BPM, and 0 BPM for apnea
Accuracy	$\pm 2$ %
Apnea	12 seconds, 22 seconds, 32 seconds, and continuous
Temperature	
Compatibility	YSI 400/700 series
Temperature	30 °C, 35 °C, 37 °C, 40 °C, and 42 °C (86 °F, 95 °F, 98.6 °F, 104 °F, and 107.6 °F)
Temperature simulation accuracy	$\pm 0.25$ °C

# PS420

## Patient Simulator

### Specifications

<b>Arrhythmias</b>	Base rate of 80 BPM Sinus arrhythmia Atrial (PAC)* Missed beat* Atrial tachycardia Atrial flutter Nodal (PNC)* Nodal rhythm Supraventricular tachycardia PVC1 left ventricular focus* PVC 1 early, LV focus* PVC1 R on T, LV focus* PVC2 right ventricular focus* PVC2 early, RV focus* PVC2 R on T, RV focus* Multifocal PVCs* Atrial fibrillation coarse/fine PVCs 6/minute PVCs 12/minute PVCs 24/minute Frequent multifocal PVCs Bigeminy Trigeminy Pair PVCs* Run 5 PVCs* Run 11 PVCs* Ventricular tachycardia Ventricular fibrillation coarse/fine Asystole Conduction defects First degree Second degree Third degree Right bundle branch block Left bundle branch block *Will go to NSR ECG @ 80 BPM after completion
<b>Artifacts</b>	50/60 Hz Muscle Baseline Respiration
<b>General</b>	
<b>Dimensions (LxWxH)</b>	15.6 cm x 9.4 cm x 3.4 cm (6.1 in x 3.7 in x 1.3 in)
<b>Weight</b>	0.4 kg (0.9 lb)

### Key features

- Range:  $10^{-1}$  to  $10^7$  mR/h
- Energy response: 10 % from 55 keV to 3 MeV

### Optional accessories

- 2462072** Universal Banana Adapter (17024)  
**2462189** Carrying Case, single pocket  
**2462177** Carrying Case, double pocket  
**2651740** Cardiac Output Adapter Box PS420 (17290)  
**2462295** BP Cable, unterminated PS420  
**2462312** Temperature Cable, unterminated PS420  
**2462217** RS-232 Cable

### Included accessories

- 2631808** PS420 Users Manual (printed)  
**2631721** PS420 Users Manual (electronic, CD)  
**2647372** Battery Eliminator 100 V ac to 240 V ac  
 9 V Battery

### Ordering information

- 2631290** PS420 Patient Simulator

# PS415

## Patient Simulator

### Key features

- Handheld
- 12-lead ECG simulations
- Wide range of arrhythmia selections
- Automatic or manual operation
- RS-232 port for computer control
- Two invasive blood pressure channels
- Respiration simulation
- Temperature simulation
- Battery operated
- Pullout card for quick menu access



The PS415 is a high-performance multiparameter patient simulator for testing full-function monitors. Compact and lightweight, the handheld PS415 provides the versatile features and convenience to meet the needs of mobile field service technicians.

The device features 12-lead ECG output, two invasive blood-pressure channels, a wide range of arrhythmia selections, and respiration and temperature simulation. With its broad capability, the PS415 provides one of the best cost-benefit ratios among simulators on the market today.

Technicians control the PS415 with manual commands or onboard autosequences. A convenient pullout card provides quick menu access for all the manual simulations, and the front panel features an easy-to-use soft-key interface.



### Optional accessories

For a complete list of cardiac adapters, temperature and blood-pressure cables, contact us.

#### Normal sinus rhythm:

Selectable rates	30 BPM, 40 BPM, 60 BPM, 70 BPM, 80 BPM, 90 BPM, 100 BPM, 120 BPM, 140 BPM, 150 BPM, 160 BPM, 180 BPM, 200 BPM, 210 BPM, 220 BPM, 240 BPM, 270 BPM, 300 BPM, and 350 BPM
Accuracy	± 1 %
Auto-step rate	30 BPM, 60 BPM, 80 BPM, 120 BPM, 180 BPM, and 240 BPM at 30-second intervals
Amplitude lead II	0.5 mV, 1 mV, 1.5 mV, and 2 mV
Amplitude accuracy	+5 % 2 Hz square wave at 1 mV p-p (Lead II)
Limb-lead impedance selections	500 Ω or 1000 Ω
V-lead impedance	1000 Ω
Accuracy	± 5 %

#### General information

Power	9 V battery for 50-hour life or line-operated via battery eliminator
Output	7.7 V ac, 100 mA, unregulated
Display	2-digit LCD
Lead test	If the resistance is less than 1 kΩ, the display flashes at the rate of 4 Hz
Data interface	RS-232 compatible, bidirectional port 5-pin DIN female connector Baud rate: 2400
Connector	2.5 mm, center (+)
Dimensions (LxWxH)	16 cm x 10.4 cm x 3.8 cm (6.3 in x 4 in x 1.5 in)
Weight	0.3 kg (0.8 lb)
Temperature	Operating: 15 °C to 35 °C (59 °F to 95 °F) Storage: 0 °C to 55 °C (32 °F to 131 °F)

### Included accessories

2572338 Operating Manual  
2183983 Battery Eliminator  
2392729 Lead-test Adapter  
2248505 Soft-sided Carrying Case

### Ordering information

2558944 PS415 Patient Simulator



# PS410

## Patient Simulator



The PS410 ECG/Arrhythmia Simulator is a compact, high-performance simulator for patient monitor testing.

This handheld device simulates a full range of cardiac rhythms and a wide variety of ECG conditions. It includes pacemaker simulation, 35 arrhythmia selections, and adult and pediatric normal-sinus rhythms.

Small enough to fit in a pocket, the handy PS410 weighs less than a pound and is easy to operate. Technicians simply connect the simulator to the device under test and use the PS410 keypad to enter the code presets. The simulator then transmits the selected preset simulations to the device.

### Key features

- Handheld
- 12-lead ECG simulation
- 12 arrhythmia selections
- Universal ECG jacks
- Auto sequencing of performance waveforms
- Battery operated

## Specifications

Normal sinus rhythm: 12-lead with independent outputs referenced to RL	
Normal rate	80 BPM
Selectable rates	30 BPM, 40 BPM, 60 BPM, 80 BPM, 100 BPM, 120 BPM, 140 BPM, 160 BPM, 180 BPM, 200 BPM, 220 BPM, 240 BPM, 260 BPM, 280 BPM, and 300 BPM
Accuracy	± 1 %
Output impedance	940 $\Omega$ between leads
ECG amplitudes	0.5 mV, 1 mV, and 2 mV
Amplitude accuracy	± 2 % Lead II
High-level output	1000x Lead II
Waveforms	Adult or pediatric ECG waveform
ECG performance: Lead II	
Square wave	2 Hz and 0.125 Hz
Pulse	30 BPM, 60 BPM, and 120 BPM; 60 ms pulse width
Sine waves	0.5 Hz, 5 Hz, 10 Hz, 40 Hz, 50, and 60 Hz (1 mV amplitude only, lead II)
Triangle wave	2 Hz
ST Segment analysis	Elevated or depressed: -0.6 mV to 6 mV in 0.2 mV steps
Pacemaker	Pacemaker rhythm Pacer non-capture Pacer non-function Demand pacer with occasional sinus Demand pacer with frequent sinus A-V sequential
Artifact selection	50 Hz artifact 60 Hz artifact Muscle artifact Baseline artifact Respiration artifact

### Optional accessories

- 2647372** Battery Eliminator  
100 V ac to 240 V ac
- 2462189** Carrying Case, single pocket
- 2462177** Carrying Case, double pocket
- 2462072** 10 Universal Banana Adapters

### Included accessories

- 2631742** PS410 Users Manual (electronic, CD)
- 2631795** PS410 Users Manual (printed)
- 2647372** Battery Eliminator 100 V ac to 240 V ac
- 9 V battery

### Ordering information

- 2631276** PS410 Patient Simulator

# PS400

## Patient Simulator



The PS400 is a basic patient simulator for quality-assurance testing of ECG machines, monitors and telemetry units.

The lightweight, handheld device features 12-lead ECG output and a single high-level output. Technicians can use manual or automatic sequence modes to check low- and high-frequency response, linearity, gain, damping, and paper speed. The PS400 also includes 12 arrhythmia selections to check arrhythmia detection systems and teach health care workers how to recognize normal and abnormal heart rhythms.

Using the PS400 is easy. The user interface features a menu selector switch and a simple-to-use rotary knob for selecting waveforms.

### Key features

- Handheld
- 12-lead ECG simulation
- 12 arrhythmia selections
- Universal ECG jacks
- Auto sequencing of performance waveforms
- Battery operated

## Specifications

Waveforms	
ECG	30 BPM, 60 BPM, 120 BPM, 180 BPM, and 240 BPM
Square wave	2 Hz
Sine waves	10 Hz, 40 Hz, 50 Hz, 60 Hz, and 100 Hz
Arrhythmias	Atrial fibrillation Second-degree A-V block, type 1 Right-bundle-branch block Premature atrial contraction Premature ventricular contraction, early Premature ventricular contraction, R on T Multifocal PVCs Bigeminy Run of 5 PVCs Ventricular tachycardia Ventricular fibrillation Paced
Automated sequence	
Pulse	4 seconds
Sine waves	10 Hz, 40 Hz, 60 Hz, and 100 Hz
Triangle wave	2 Hz
Rate accuracy	± 0.5 %
Amplitudes	
Lead I	0.5 mV, 1 mV, 1.5 mV, and 2 mV
High-level output	0.25 V, 0.5 V, 0.75 V, and 1 V
Accuracy	± 2 %
Hz	2 Hz square wave at 2 mV (all leads)
General information	
Power	9 V alkaline battery for 200-hour life or line-operated via battery eliminator 115 V ac or 230 V ac or 7.7 V dc, 100 mA, unregulated Connector, 2.5 mm center (+)
Dimensions (LxWxH)	13.2 cm x 9.9 cm x 3.6 cm (5.2 in x 3.9 in x 1.4 in)
Weight	0.4 kg (0.9 lb)
Operating temperature	15 °C to 35 °C (59 °F to 95 °F)
Storage temperature	0 °C to 55 °C (32 °F to 131 °F)

### Optional accessories

2200116 High-level ECG Cable

### Included accessories

2572345 Operating Manual  
2248424 Soft-sided Carrying Case  
2183983 Battery Eliminator  
9 V Battery

### Ordering information

2558932 PS400 ECG/  
Arrhythmia Simulator

# DataSim 6100

## Patient Simulator



The DataSim 6100 offers six channels for generating ECG arrhythmias, blood pressure, and respiration. Features include a standard defibrillator training capability, along with an internal battery. All control keys and display prompts can be found on DataSim's convenient, handheld keypad, which is connected to the unit with a flexible, 6.1 m (20 ft) telephone-style cord for exceptional range of motion.

Critical Care Nurses, ACLS program instructors, and other clinical educators can

use DataSim 6100 to generate an extensive range of simulations, from a simple normal sinus rhythm to a complex Swan-Ganz catheter insertion.

### Key features

- Interface with Resusci-Anne™, Arrhythmia Anne™, and Chris Clean™
- Synchronized hemodynamic waveforms
- ECG/Respiration
- Manual PAC and PVC insertions
- Swan-Ganz procedure
- Expansion modules
- Training capabilities

### Optional accessories

For a complete list of blood-pressure cables and personality modules, contact us.

## Specifications

<b>Optional personality modules</b>	<ul style="list-style-type: none"> <li>• Pediatric ECG</li> <li>• Intracranial pressures</li> <li>• Advanced pacemaker</li> <li>• MCL1 atrials</li> <li>• MCL1 blocks</li> <li>• MCL1 ectopy/aberrancy</li> <li>• MCL1 set</li> <li>• Normal/diseased left heart</li> <li>• 12-lead set</li> <li>• ST segments</li> <li>• Intra-aortic balloon assist (interactive)</li> <li>• Cardiac output</li> </ul>
<b>Dimensions (WxDxH)</b>	25.4 cm x 33 cm x 10.2 cm) (10 in x 13 in x 4.7 in )
<b>Weight</b>	3.2 kg (7.1 lb)

### Included accessories

2242959 Operator's manual  
 2392337 LCD pendant controller  
 2426360 Universal Battery Charger  
 XXXXXXX Power Cord (country specific)

### Ordering information

#### DataSim 6100 Patient Simulator

2247742 United States, 120 V  
 2395218 Australia, 250 V  
 2395229 Denmark, 250 V  
 2395234 Schuko, 250 V  
 2395241 Israel, 250 V  
 2395252 Italy, 250 V  
 2395265 India, 250 V  
 2395276 Switzerland, 250 V  
 2395283 United Kingdom, 250 V

# HHC3

## Hand Held Controller



The HHC3 Hand Held Controller is used to remotely operate medSim 300B, MPS450 and Marq III simulators in an easy and efficient manner. The HHC3 has all the output controls for these simulators and enables current simulator users, including hospital biomedical technicians and manufacturers, to simplify and standardize their testing, training, and preventive maintenance protocols. In addition, the HHC3 is an excellent device for biomedical training and demonstration use.

The HHC3 facilitates the direct selection of parameters for the Fluke Biomedical medSim 300B,

MPS450, and Marq III simulators. The HHC3 uses flexible coiled cable to connect to a simulator. The HHC3 provides single-key commands, dual-key commands, factory-defined sequences and easy programming of user-defined sequences. Customers can use the HHC-Utility software to upload user-defined sequences from a PC and download the sequences to multiple controllers.

### Key features

- Full-functionality control of the simulator, up to 6.1 m (20 ft) away
- Small and light weight
- Factory-defined sequences provided
- Easy programming for user-defined sequences
- Ability to run defined sequences repeatedly
- PC interface for simple configuration (utility)



## Specifications

Power requirements	
medSim 300B	RS-232 cable supplies power to the HHC3
MPS450	Four alkaline AA batteries or battery eliminator
Marq III	Four alkaline AA batteries or battery eliminator
Battery power supply	
Four alkaline AA cells, non-rechargeable voltage	1.5 V dc x 4 V dc
Battery life (continuous use)	60 hours
Battery eliminator supply	Output voltage: 9 V dc
	Output current: 50 mA
General information	
Display	2 x 16 LCD, adjustable viewing angle
Controls	20 control keys and ON/OFF power switch
	Embossed keys in 4 x 5 matrix
Interface	RS-232 bidirectional interface
	Auto connect to simulator parameters
Altitude	Up to 2000 m
Dimensions (LxWxH)	3.6 cm x 8.1 cm x 16 cm (1.4 in x 3.2 in x 6.3 in )
Weight (with batteries)	0.36 kg (0.8 lb)

### Optional accessories

2720054 Battery Eliminator

### Included accessories

2671068 Users Manual  
 2712829 medSim 300B Serial Interface Cable  
 2702279 MPS450 and Marq III Serial Interface Cable  
 2702287 Serial Interface Cable HHC3 to Computer  
 2671031 Utility Software  
 2671046 medSim 300B Instruction Card  
 2671022 MPS450 and Marq III Instruction Card  
 2242666 4-way Stop Cock Adapter  
 AA alkaline batteries (4)

### Ordering information

2645641 HHC3 Hand Held Controller



# PS320

## Fetal Simulator



The PS320 simulates fetal and maternal ECG as well as uterine activity to test and troubleshoot fetal electronic monitors and to train clinical staff.

The unit is battery operated and small enough to fit in a pocket so mobile technicians and clinical instructors can take it anywhere.

The PS320 simulates several fetal parameters, including twins, as well as a wide range of clinical scenarios for training

labor-and-delivery staff in how to recognize normal and abnormal responses. An optional mechanical heart creates fetal heart sounds for testing fetal monitor ultrasound cables and transducers.

PS320 offers an easy user interface, providing a 2 x 16-character LCD display with adjustable contrast. The unit operates on a 9 V battery with low-battery monitoring or functions with the supplied battery eliminator.



### Key features

- Mechanical heart for ultrasound simulation
- TOCO simulation (External or IUP)
- Ultrasound simulation (including twins)
- Maternal ECG simulation
- Fetal ECG (tracks ultrasound #1)
- Internal (DECG) and external fetal ECG
- Uterine-activity selections
- Fetal beat-to-beat variability
- Periodic and non-periodic fetal ECG changes
- Arrhythmia selections
- Compact, lightweight, pocket-size plastic housing
- Battery operated with status indications
- Special kits available with all required accessories and cables to test fetal monitors for specified manufacturers

## Specifications

Fetal ECG	
Static rates	30 BPM, 60 BPM, 90 BPM, 120 BPM, 150 BPM, 180 BPM, 210 BPM, and 240 BPM
ECG sensitivity	50 $\mu$ V, 100 $\mu$ V, 200 $\mu$ V, 0.5 mV, 1 mV, and 2 mV
	US-1 tracks primary fetal ECG rates
	US-2 tracks secondary fetal activity for either independent "normal" or "twins" simulation, US-2 rate fixed at 140 BPM
Fetal patterns	<b>Trend #1: Twin fetal patterns</b>
<b>Note:</b> US-1 and fetal ECG track these selections. US-2 is in normal pattern, except during TREND #1 selection.	Normal: Normal pattern
	Tachycardia: Tachycardia pattern
	Bradycardia: Bradycardia pattern
	Arrhythmias: Arrhythmia pattern
	Late deceler.: Late deceler.
	Early deceler.: Early deceler.
	Moderate deceler.: Moderate variable deceler.
	Acceler.: #1: Acceler. wave #1
	Acceler.: #2: Acceler. wave #2
	Sinusoidal (high): Sinusoidal pattern, large change
	Sinusoidal (low): Sinusoidal pattern, small change
	Severe var. deceler.: #1: Severe deceler. wave #2
	Severe var. deceler.: #2: Severe variable deceler
	Prolonged deceler.: Prolonged deceler
	Biphasic deceler.: Biphasic deceler
	Exaggerated deceler.: Exaggerated deceler
	Non-uniform deceler.: Non-uniform deceler
	Var. deceler. (u): Variable deceler, "U shaped
	Var. deceler. Tach: Variable deceler. with high-rate BPM
	Var. deceler. (v): Variable deceler. "V shaped
	Var. deceler. (post): Variable deceler. post exaggerated
	Var. deceler.: Variable deceler.
	Deceler. (position): Variable deceler. with position changes
	Long deceler.: Long deceler.
	Compensatory acceler.: Compensatory acceler

### Optional accessories

- 2647372** Battery Eliminator  
100 V ac to 240 V ac
- 2462177** Carrying Case, Double Pocket
- 2462478** Philips 50 Series—Ultrasound Cable
- 2462491** Agilent 50 Series TOCO—External Cable
- 2462528** Agilent 50 and 8040 Series TOCO—IUP Cable
- 2462469** Corometrics TOCO—External Cable
- 2462484** Corometrics—Ultrasound Cable
- 2462519** Corometrics TOCO—IUP Cable
- 2462528** HP/AG/PHILIPS IUP TOCO Simulation Cable
- 2462537** HP (8040 Series) Ultrasound Simulation Cable
- 2462543** HP (8040 Series) Ext TOCO Simulation Cable
- 2462555** **2462562** Oxford Ultrasound Simulation Cable 2.0 MHz (blue)
- 2462570** Oxford IUP Simulation Cable
- 2462217** RS-232 Cable
- 2651757** Mechanical Fetal Heart Probe
- 2462123** Mechanical Fetal Heart Cable

# PS320

## Fetal Simulator

### Specifications

Fetal ECG (continued)	
<b>Variability selections</b> (added to fetal ECG)	Absent variability, low variability, mild variability, high variability severe variability, long-term variability <b>Note:</b> These patterns repeat and toco channel will perform toco wave selected.
<b>Optional mechanical heart</b>	Provides a mechanical interface to the ultrasound transducer; can be connected to either ultrasound channels. This option, due to its power consumption, requires an ac adapter to be connected.
<b>Maternal ECG</b>	ECG static rates: 60 BPM, 80 BPM, 100 BPM, 120 BPM, 140 BPM, and 160 BPM ECG sensitivity: 0.5 mV, 1 mV, and 2 mV Pattern selected during Trend #1 selection
<b>Uterine activity</b> <b>Note:</b> Toco waveform selection not available during Trend #1.	Execute waveform: Start toco waveform Uterine wave Off: Stop toco waveform Analog 0 V TO 1 V: Analog range 0 V to 1 V (1 V = 100 mmHg) Uterine wave 0 to 25: Range of toco waveform Uterine wave 0 to 50: Range of toco waveform Uterine wave 0 to 100: Range of toco waveform Short duration: Toco waveform of short duration Normal duration: Normal duration of toco waveform Increased duration: Long duration of toco waveform Uterine level = Zero: Zero toco channel (automatic on power up) Uterine static +20: Increase toco static level by 20 mmHg (0 mmHg to 100 mmHg) Incr. resting tone: Resting tone increases Couping: 2 close toco waves Tripling: 3 close toco waves Uterine pressure sensitivity: 5 $\mu$ V or 40 $\mu$ V on power up
<b>Important notes</b>	<ul style="list-style-type: none"> <li>US-1 tracks the fetal ECG rates</li> <li>US-2 is the second ultrasound channel with a normal fetal ECG pattern</li> <li>On the fetal and maternal ECG, the fetal ECG is 1/4 the size of the maternal ECG</li> </ul>
<b>The PS320 turns on in the following state:</b>	<ul style="list-style-type: none"> <li>Fetal ECG static rate @ 150 BPM</li> <li>US-1 tracks @ 150 BPM</li> <li>US-2 normal pattern</li> <li>Pressure sensitivity @ 5 <math>\mu</math>V/mmHg</li> <li>Pressure/Toco set to zero</li> <li>Maternal ECG rate @ 80 BPM</li> <li>ECG sensitivity @ 1 mV</li> <li>Toco wave is normal duration @ 0 to 50 divisions (i.e. 0 mmHg to 50 mmHg)</li> </ul>
Temperature	
<b>Operating</b>	15 °C to 35 °C (59 °F to 95 °F)
<b>Storage</b>	0 °C to 50 °C (32 °F to 122 °F)
General information	
<b>Display</b>	2-line x 16-character LCD with keypad
<b>RS-232</b>	Bidirectional interface, 9600 baud
<b>Power</b>	9 V battery/battery eliminator; low battery indication set at 6 V
<b>Housing</b>	Plastic case
<b>Dimensions</b>	15.6 cm x 9.4 cm x 3.4 cm (6.1 in x 3.7 in x 1.3 in)
<b>Weight</b>	0.4 kg (0.9 lb)

### Ordering information

**2583030** PS320 Fetal Simulator

#### Kit #1: GE Corometrics

**2794057** PS320 Fetal Monitoring Kit, GE Corometrics, includes:

**2583030** PS320 Fetal Simulator (includes Operator Manual (2631693), Battery Eliminator (2647372), 9 V Battery)

**2651757** MFH-1 Mechanical Fetal Heart

Probe [includes Fetal Heart Cable (2462123)]

**2397628** Soft-Sided Carrying Case for kit

**2462217** 17291 RS-232 Cable, PS320/420

**2462484** Corometrics Ultrasound Simulation Cable

**2462469** Corometrics EXT. TOCO Simulation Cable

**2462519** Corometrics IUP TOCO Simulation Cable

#### Kit #2: Hewlett-Packard, Agilent, Philips Medical

**2794069** PS320 Fetal Monitoring Kit, Series 50/8040 Philips Medical, Hewlett-Packard, Agilent, includes:

**2583030** PS320 Fetal Simulator (includes Operator Manual (2631693), Battery Eliminator (2647372), 9 V Battery)

**2651757** MFH-1 Mechanical Fetal Heart

Probe [includes: Fetal Heart Cable (2462123)]

**2397628** Soft-Sided Carrying Case for kit

**2462217** RS-232 Cable, PS320/420

**2462478** HP/AG/PHILIPS (50 Series)

Ultrasound Simulation Cable PS320

**2462491** HP/AG/PHILIPS (50 Series) EXT

TOCO Simulation Cable PS320

**2462528** HP/AG/PHILIPS (50 & 8040 Series)

IUP TOCO Simulation Cable PS320

**2462537** HP (8040 Series) Ultrasound

Simulation Cable PS320

**2462543** HP (8040 Series) EXT TOCO

Simulation Cable PS320

#### Kit #3: Oxford Medical

**2794078** PS320 Fetal Monitoring Kit, Oxford Medical, includes:

**2583030** PS320 Fetal Simulator (includes Operator Manual (2631693), Battery Eliminator (2647372), 9 V Battery)

**2651757** MFH-1 Mechanical Fetal Heart

Probe [includes: Fetal Heart Cable (2462123)]

**2397628** Soft-Sided Carrying Case for kit

**2462217** RS-232 Cable, PS320/420

**2462570** Oxford TOCO IUP Simulation Cable

PS320

**2462562** Oxford Ultrasound Simulation Cable

2 MHz (blue) PS320

**2462555** Oxford Ultrasound Simulation Cable

1.5 MHz (yellow) PS320

#### Kit #4: Spacelabs Medical

**2794040** PS320 Fetal Monitoring Kit,

Spacelabs Medical, includes:

**2583030** PS320 Fetal Simulator (includes Operator Manual 2631693), Battery Eliminator

(2647372), 9 V Battery)

**2651757** MFH-1 Mechanical Fetal Heart

Probe [includes Fetal Heart Cable (2462123)]

**2397628** Soft-Sided Carrying Case for kit

**2462217** 17291 RS-232 Cable, PS320/420

**2462581** Spacelabs Ultrasound Simulation

Cable PS320

**2462596** Spacelabs TOCO Simulation Cable

PS320

# Index 2

## Pulse Oximeter Simulator



The Index 2 is the most versatile optical simulator for oximeters on the market today. This lightweight, portable tool includes preloaded manufacturers' R-curves and the ability to define other "makes for most pulse oximeters.

Motion presets, player mode, transmission level control (TLC), and computer commands boost testing ability. The Index 2 can also be configured to include an optional electrical simulation feature with probe test. Optical and electrical simulations allow technicians to isolate problems quickly. The probe test identifies defective probes with quantitative test results.

### Key features

- Portable
- 10 preloaded manufacturers' R-curves
- User-definable "makes for most other manufacturers
- New R-curves for Masimo, Nonin and Philips Medical Systems (formerly Agilent/H-P) oximeters
- Six downloadable R-curve spaces available
- Simultaneous simulation of motion and arterial-oxygen levels
- Arterial wave-amplitude scale, calibrated in units of perfusion
- Tap/shiver motion simulations to explore the impact of motion
- RS-232 port for computer control
- Physiological finger for complete SpO<sub>2</sub> tests
- Electrical simulations with probe testing (optional)

### Specifications

O <sub>2</sub>	Range: 35 % to 100 %
	Resolution: 1 %
	Accuracy: 100 % to 75 %: $\pm 1\%$ $\pm$ accuracy of the pulse oximeter under test; 74 % to 50 %: $\pm 3\%$ $\pm$ the accuracy of the pulse oximeter under test; < 50 % unspecified
	Repeatability: $\pm 1$ standard deviation
Rate	Range: 30 BPM to 250 BPM
	Resolution: 1 BPM
	Accuracy: $1\% \pm 1$ BPM
Pulse amplitude	Range: 0 % to 100 % of nominal pleth amplitude
	Resolution: 1 %
	Pulse amplitude is 20 % of maximum pass-through brightness
Probe test	Continuity/resistance test matrix: Measures all combinations of possible interconnections in an XX point matrix
	Range: 250 $\Omega$ to 150 k $\Omega$
	Accuracy: $\pm 5\%$ of reading
LED/detector voltage test	Test format: Measures the voltage drop across Red LED, infrared LED, and the photo detector when the internally generated test signal is applied
	Test signal: Constant current source @ 1 mA
	Open circuit: 2.5 V max
	Measurement/display range: 0 V to 4 V
Dynamic test	Accuracy: $\pm 5\%$ of reading, 0.4 V to 4 V
	Test format: Photodetector/diode response to both the red and infrared light generated by the probe when pulsed by an internal test signal
	Test signal: Pulsed between the two LEDs; constant current level @ 1 mA
	Test results: Nominal range of 0 to 2000
Checksum	Sum of all locations in the program chip; for service use only
<b>General information</b>	
Display	2-line x 24-character super twist LCD
Battery life	At least four hours of continuous use
Dimensions (LxWxH)	45.7 cm x 40.6 cm x 22.9 cm (18 in x 16 in x 9 in)
Weight	4.5 kg (10 lb)

### Optional accessories

**2204282** Soft Vinyl Carrying Case  
**2200102** Interface Cable, medTester to Index 2 (RS-232; female DB25 to female DB9)

For a complete list of electrical simulation and probe test cables, contact us.

### Included accessories

**2226196** Operator's Manual  
**2521465** Battery Charger  
 Nellcor and Ohmeda Electrical Simulation and Probe Test Cable (for Index2<sub>XLFE</sub> only)

### Ordering information

**Index 2XLFE Pulse Oximeter Simulator – Optical Finger Simulation**

**2250232** United States, 120 V  
**2395290** Shuko, 250 V  
**2399900** Australia, 250 V  
**2399917** United Kingdom, 250 V  
**2447476** Japan, 100 V

**Index 2XLFE Pulse Oximeter Simulator – Optical Finger and Electrical Simulation with Probe Test**

**2250244** United States, 120 V  
**2395309** Shuko, 250 V  
**2399921** Australia, 250 V  
**2399939** United Kingdom, 250 V  
**2447465** Japan, 100 V

# ACCU LUNG

## Portable Precision Test Lung



The ACCU LUNG Precision Test Lung is a lung simulator that presents a specific load comprised of a user-selectable compliance and resistance for the purpose of evaluating ventilator performance according to clinical expectation and manufacturers' specification. It is a portable unit that can be hung from a cart, the ventilator itself, or can be hand-held, thus presenting a "zero footprint."

### Key features

- Portable (light weight, small footprint)
- User-selectable compliance and resistance settings (three selections each)
- Calibrated accuracy for both resistance and compliance
- Complies with IEC standard for breathing-circuit connection
- Certified test lung for test system traceability to standards

## Specifications

Environmental parameters	
Operating temperature	10 °C to 40 °C
Storage temperature	0 °C to 50 °C
Performance characteristics	
Static compliance	C50 0.5 l/kPa $\pm$ 10 % at 500 ml tidal volume
	C20 0.2 l/kPa $\pm$ 10 % at 500 ml tidal volume
	C10 0.1 l/kPa $\pm$ 10 % at 300 ml tidal volume
Resistance	Parabolic (orifice) resistor pressure drops selected from ASTM F1100 (K values), for inspiratory flows at 2, 1, and 0.5 l/s, respectively.
	Rp5 K 2.70 $\pm$ 20 % (equivalent orifice size = 8.48 mm) pressure drop 10.80 cmH <sub>2</sub> O at 2 l/s
	Rp20 K 17.61 $\pm$ 20 % (equivalent orifice size = 5.31 mm) pressure drop 17.61 cmH <sub>2</sub> O at 1 l/s
	Rp50 K 108.70 $\pm$ 20 % (equivalent orifice size = 3.37 mm) pressure drop 27.20 cmH <sub>2</sub> O at 0.5 l/s
Physical characteristics	
Ventilator circuit connection	ISO 22 mm female
Warranty specifications	15 month extended warranty on all parts and labor with the following limitations: a) All rubber parts (including bellows made from Hypalon*) are warranted to be free from defects at the time of delivery b) Springs are considered limited lifecycle parts and are expected to survive 1 x 10 <sup>6</sup> cycles
Dimensions (LxWxH)	27.9 cm x 21.6 cm x 10.2 cm (11 in x 8.5 in x 4 in)
Weight	1.8 kg (4 lb)

### Included accessories

Operator's/Service Manual  
2397628 Soft-sided Carrying Case

### Ordering information

2387318 ACCU LUNG  
Precision Test Lung



# VT MOBILE

## Portable Gas-Flow Analyzer



The VT MOBILE is a compact and portable general purpose gas-flow analyzer designed to meet the needs of the traveling technician or engineer. This versatile tool evaluates performance of a wide variety of medical gas-flow/pressure devices and measures 16 ventilator parameters.

EC.6.20 now requires completion of 100 % of life-support device preventive maintenance every year. VT MOBILE can help you meet those requirements.

The base unit measures high- and low-flow ranges, volume, pressure, and oxygen concentration. Additionally, the temperature and relative humidity option can be ordered separately to ensure the most accurate gas-flow measurements.

### Key features

- Bidirectional flow (high- and low-flow ranges), volume, vacuum, pressure and oxygen concentration measurements
- 16 ventilator parameter measurements
- Trending and statistical analysis of all measured values
- Onboard graphical display
- Portable and compact
- RS-232 for computer control
- Memory for storing results
- VT for Windows PC software
- Optional sensor assembly for temperature and humidity measurements

## Specifications

Display	64 pixels x 128 pixels, reflective LCD, blue on yellow
Gas types	Air, N <sub>2</sub> , N <sub>2</sub> O, CO <sub>2</sub> , O <sub>2</sub> , N <sub>2</sub> O bal O <sub>2</sub> , N <sub>2</sub> bal O <sub>2</sub>
Battery power supply	Input voltage range: 9 V dc Battery life: > 7 hours
Dimensions (LxWxH)	20 cm x 10 cm x 3.8 cm (8 in x 4 in x 1.5 in)
Weight	0.45 kg (1 lb)

	Low-pressure port	High-pressure port	Airway pressure
Maximum applied pressure	5 psi	125 psi	5 psi
Operating pressure	-20 cmH <sub>2</sub> O to 120 cm H <sub>2</sub> O	-2 psi to 100 psi	-20 cmH <sub>2</sub> O to 120 cmH <sub>2</sub> O
Span accuracy	+2 % of reading or 1.5 mmHg	+2 % of reading or +0.2 psig	+2 % of reading or +0.5 cmH <sub>2</sub> O



VT MOBILE Tilt Stand in low-tilt position

## Product comparison chart

Model	VT MOBILE	VT PLUS HF
Flow range	25 to 200 l/min (high flow sensor) 0 to 25 l/min (low flow sensor)	25 to 300 l/min (high flow channel) 0 to 25 l/min (low flow channel)
Features and benefits	Portable, battery-powered, all ranges of pressure, flow, temperature, and RH measurement, easy-to-use	Bench-top or portable, line-powered, all ranges of pressure, flow, easy-to-use
	16 ventilator parameters on three screens	21 ventilator parameters on one screen
	On-screen pressure, flow and volume waveforms	On-screen pressure, flow and volume waveforms
	Ventilator and non-ventilator flow measurements	Ventilator and non-ventilator flow measurements
	On-board memory for temporary test result storage	On-screen pressure, flow and volume waveforms
	—	Special modes for High Frequency ventilators and RT-200 emulation
	Compatible with VT for Windows® PC software (standard accessory)	Compatible with VT for Windows® PC software (standard accessory)

# VT MOBILE

## Portable Gas-Flow Analyzer

### Specifications

	High-flow port	Low-flow port
Operating flow range	± 200 lpm	+25 lpm
Accuracy	± 3 % of reading or ± 2 % of range	+3 % of reading or +1 % of range
Floor for absolute accuracy	25 lpm	3 lpm
Low-flow dropout	2.5 lpm	0.24 lpm
Volume range	> ± 60 l	+60 l
Tidal volume accuracy	± 3 % of reading or ± 20 ml, whichever is greater	+3 % of reading or +2 ml

	Oxygen measurement	Barometric pressure measurement
Range	0 % to 100 %	8 psia to 18 psia (400 mmHg to 900 mmHg)
Accuracy	+2 % full-scale output	+2 % of reading
Sensor technology	Galvanic fuel cell	—
Calibration	Allows user calibration using air and 100 % O <sub>2</sub>	Not required; however, device allows user calibration of offset

#### Notes:

- Automatic partial pressure compensation for barometric and airway pressure changes.
- Recommended interval for changing oxygen sensor is one year. However, sensor may last longer. During user calibration of the sensor, the VT MOBILE can detect if the sensor needs to be replaced.

Secondary parameter-accuracy specifications	Resolution	Range	Accuracy
Inspiratory and expiratory tidal volume	0.1 ml	> 10 l	± 3 % expiratory minute volume
	0.001 lpm	0 l to 60 l	± 3 %
Breath rate	0.1 BPM	2 BPM to 150 BPM	± 1 % inspiratory-to-expiratory time ratio (I:E ratio)
	0.01 Range: 0.25 to 9.99	—	± 2 % or 0.1 s
Peak inspiratory pressure	0.1 cmH <sub>2</sub> O	± 120 cmH <sub>2</sub> O	+3 % or 1 cmH <sub>2</sub> O
Inspiratory pause pressure	0.1 cmH <sub>2</sub> O	± 120 cmH <sub>2</sub> O	+3 % or 1 cmH <sub>2</sub> O
Mean airway pressure	0.1 cmH <sub>2</sub> O	+80 cmH <sub>2</sub> O	+3 % or 0.5 cmH <sub>2</sub> O
Positive-end expiratory pressure (PEEP)	0.1 cmH <sub>2</sub> O	-5 cmH <sub>2</sub> O to 40 cmH <sub>2</sub> O	+3 % or 0.5 cmH <sub>2</sub> O
Peak expiratory flow	0.01 lpm	0 lpm to 150 lpm	± 3 % or 2 % of range
Temperature	0.1 °C	0 °C to 50 °C	± 1 °C
	Units: °C, °F, °K		
Humidity	0.1 %	0 % to 100 %	± 5
RS-232 serial communications	4-pin modular connector located on upper-left side of panel. RS-232 compatible with the VT Plus for Windows software application (version 2.01.00 or higher.)		

#### Environmental specifications

Operating temperature	10 °C to 40 °C (50 °F to 104 °F)
Storage temperature	-25 °C to 50 °C (-13 °F to 122 °F)
Operating humidity	0 % to 80 % non-condensing at temperatures to 31 °C, decreasing linearly to 50 % relative humidity at 40 °C (104 °F)
Storage humidity	0 % to 95 % non-condensing
Operating barometric	7 psia to 18 psia
Storage barometric	787.9 mmHg to 522.7 mmHg (-1000 ft to 10000 ft)

### Optional accessories

**2548405** Accessory Kit  
**2548431** High-flow Sensor  
**2548422** Low-flow Sensor  
**2548303** High-pressure Adapter, male to male  
**2548315** High-pressure Adapter, male to female  
**2454175** Low-pressure Adapter  
**2541622** Temperature and RH Sensor, Cable and T Adapter, 6 ft  
**2457028** Oxygen-Sensor Cable, 6 ft  
**2448051** T Adapter for Oxygen Sensor  
**2558269** VT for Windows® PC Software  
**2075257** Serial Communications Cable (RS-232), 6 ft  
**2547455** Power adapter, universal (USA and international)  
**2551236** Soft Carrying Case  
**2387318** ACCU Lung Portable Precision Test Lung

### Included accessories

**2548405** Accessory Kit  
**2544903** CD, includes: quick-reference card, operators manual, getting-started manual, other matter  
**2544892** Getting Started Manual  
**2544630** Quick Reference Card  
**2548431** High-flow Sensor  
**2548422** Low-flow Sensor  
**2548315** High-pressure Adapter, Male to Female  
**2454175** Low-pressure Adapter  
**2448051** Oxygen-sensor Cable, 6 ft  
**2457028** T Adapter for Oxygen Sensor  
**2248801** Oxygen Sensor  
**614487** 9 V dc Battery (alkaline)  
**2075257** Serial Communications Cable (RS-232), 6 ft  
**2558269** VT for Windows® PC Software  
**2551236** Soft Carrying Case

### Ordering information

#### VT MOBILE Portable Gas-Flow Analyzer

**2427911** United States, English overlay  
**2553550** France, French overlay  
**2542531** Denmark, German overlay  
**2542546** Italy, Italian overlay  
**2542554** Spanish, Spanish overlay  
**2553610** Japan, Japanese overlay  
**2553605** Chinese, Chinese overlay

# VT PLUS HF

## Gas Flow Analyzer



those requirements. Multiple special-function tests make troubleshooting quick and efficient.

Learning to use the VT PLUS HF is simple. Technicians control the unit using the VT PLUS HF user-friendly command system, or, if they're familiar with the RT-200, they can switch to a special control mode that uses RT-200-style commands.

The VT PLUS HF is Fluke Biomedical's premier general-purpose gas flow analyzer. In addition, special display modes and bidirectional flow make it perfect for fully and efficiently testing both conventional mechanical ventilators and high-frequency ventilators. EC.6.20 now requires 100 % completion of scheduled life-support device preventive maintenance every year, and VT PLUS HF can help meet

### Key features

- Bidirectional flow, pressure, volume, and oxygen concentration, and pressure measurements
- Low- and high-pressure, and flow measurement capability
- Special HF mode—up to 900 BPM (15 Hz)
- RS-232 and printer ports
- Included Windows-compatible graphics software
- All 21 ventilator parameters displayed at once on one screen
- Operation by user-friendly VT PLUS HF command mode or special RT-200 command mode
- Minimum, maximum, average, absolute, and graph for all parameters
- Multiple special-function tests for efficient troubleshooting

### Optional features

- Operation with a variety of precision test lungs available from Fluke Biomedical to complete a fully NIST-traceable ventilator testing system

## Specifications


	Low-pressure	High-pressure	Airway-pressure
<b>Range</b>	± 500 mmHg (10 psi)	± 100 psi	± 120 cmH <sub>2</sub> O
<b>Accuracy</b>	± 0.5 % of reading or ± 1.5 mmHg, whichever is greater	± 1 % of reading or ± 0.1 psig, whichever is greater	± 0.75 % of reading or ± 0.5 cmH <sub>2</sub> O, whichever is greater
<b>Note</b>	Fluid pressure may be applied to the positive port; however, fluids should be kept from entering the pressure port by using a suitable length of connection tubing.		Airway pressure is internally tapped off the proximal-flow sensor port, which is the port closest to the exhaust port on the VT PLUS HF

	Low-flow	High-flow
<b>Flow range</b>	-25 lpm to 25 lpm	-300 lpm to 300 lpm
<b>Accuracy</b>	± 2 % of reading or ± 1 % of range, whichever is greater	± 2 % of reading or ± 2 % of range, whichever is greater
<b>Low-flow dropout</b>	0.01 lpm	—
<b>High-flow dropout</b>	—	25 lpm
<b>Volume range</b>	> ± 60 l	> ± 60 l
<b>Notes</b>	<ul style="list-style-type: none"> <li>• Tidal-volume accuracy: ± 3 % of reading or ± 2 ml, whichever is greater</li> <li>• Volume accuracy tested to 1 liter</li> <li>• Flow accuracy is specified for dry air or oxygen</li> <li>• Below 3.0 lpm, measurement accuracy is obtained by allowing the VT PLUS HF to fully warm up or manually zeroing before reading or documenting measurement.</li> </ul>	<ul style="list-style-type: none"> <li>• Tidal-volume accuracy: ± 3 % of reading or ± 10 ml, whichever is greater</li> <li>• Volume accuracy tested to 7 liters</li> <li>• Flow accuracy is specified for dry air or oxygen</li> </ul>

General	
<b>Dimensions (LxWxH)</b>	25.4 cm x 25.4 cm x 12.7 cm (10 in x 10 in x 5 in )
<b>Weight</b>	4.53 kg (10 lb)



VT PLUS HF standard accessories

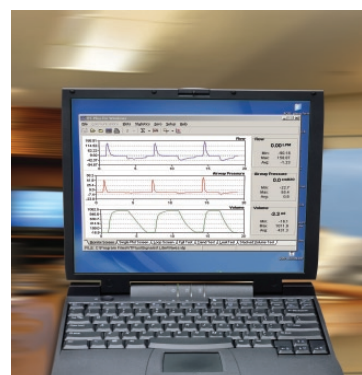

VT for Windows PC Software (PC not included)

# VT PLUS HF

## Gas Flow Analyzer

### Specifications

Ventilator parameter	Resolution	Range	Accuracy
Inspiratory and expiratory tidal volume	0.1 ml	As specified in high-flow/low-flow specification	
Expiratory minute volume	0.001 lpm	0 L to 60 L	± 3 %
Breath rate	0.1 BPM	0.5 BPM to 150 BPM	± 1 %
Inspiratory-to expiratory time ratio (I:E ratio)	0.01	1:200 to 200:1	± 2 % or ± 0.1 s
Inspiratory time	0.01 s	0 s to 60 s	± 1 % or ± 0.02 s
Expiratory time	0.01 s	0 s to 90 s	± 1 % or ± 0.01 s
Peak inspiratory pressure	0.1 cmH <sub>2</sub> O	± 120 cmH <sub>2</sub> O	± 3 % or ± 1 cmH <sub>2</sub> O
Inspiratory pause pressure	0.1 cmH <sub>2</sub> O	± 120 cmH <sub>2</sub> O	± 3 % or ± 1 cmH <sub>2</sub> O
Mean airway pressure	0.1 cmH <sub>2</sub> O	± 80 cmH <sub>2</sub> O	± 3 % or ± 0.5 cmH <sub>2</sub> O
Positive end-expiratory pressure (PEEP)	0.1 cmH <sub>2</sub> O	-5 cmH <sub>2</sub> O to 40 cmH <sub>2</sub> O	± 3 % or ± 0.5 cmH <sub>2</sub> O
Inspiratory hold time	0.01 s	0 s to 60 s	± 1 % or ± 0.1 s
Expiratory hold time	0.01 s	0 s to 90 s	± 1 % or ± 0.1 s
Peak expiratory flow	0.01 lpm	0 lpm to 300 lpm	± 3 % or ± 2 lpm
Peak inspiratory flow	0.01 lpm	0 lpm to 300 lpm	± 3 % or ± 2 lpm
Lung compliance	0.1 ml/cmH <sub>2</sub> O	0 ml/cmH <sub>2</sub> O to 150 ml/cmH <sub>2</sub> O	± 5 % or ± 5 ml/cmH <sub>2</sub> O
		Inspiratory pause time: > 0.5 s	
Flow bias	0.01 lpm	0 lpm to 30 lpm	± 2 % or ± 0.5 lpm
		Expiratory pause time: > 0.5 s	

### Optional accessories

**2222822** Soft Vinyl Carrying Case for VT PLUS HF

**2248587** Hard-sided Protective Carrying Case for VT PLUS HF (limited to stock on hand)

**2397628** Soft-sided Carrying Case for ACCU LUNG

#### Test Lungs

**2387318** ACCU LUNG Portable Precision Test Lung (with Soft-sided carrying case for ACCU LUNG, model 2397628)

**2251049** Michigan Instruments Non-instrumented Single-adult Test Lung

**2251008** Michigan Instruments Non-instrumented Dual-adult Test Lung

**2251013** Michigan Instruments Non-instrumented Adult/Infant Test Lung

**2213774** Siemens 190 Test Lung

#### Parabolic Airway Resistors (for use with Michigan Instruments test lungs)

**2212830** Parabolic Airway Resistor: RP5

**2212934** Parabolic Airway Resistor: RP10

**2212848** Parabolic Airway Resistor: RP20

**2212853** Parabolic Airway Resistor: RP50

**2212918** Parabolic Airway Resistor: RP200

**2213140** Parabolic Airway Resistor: RP500

#### Printers

**2248762** Printer 110 V, Citizen IDP 3110

**2719653** Printer 220 V, Citizen IDP 3110

**2238072** Parallel Printer Cable, D25M-C36M

### Accessory Kit Parts

**2133712** Filter, External (bacterial), 1 each

**2391777** Adapter, DISS O2 nut and nipple with 1/4 in I.D. hose barb, 1 each

**2133310** Tubing Adapter, Directional (15 mm OD x 15 mm OD), 2 each

**2133305** Tubing Adapter (22 mm OD x 22 mm ID), 2 each

**2133291** Tubing Adapter (22 mm OD x 22 mm OD), 2 each

**2133269** Tubing Adapter (15 mm OD x 22 mm OD), 2 each

**2133278** Tubing Adapter (15 mm OD x 15 mm OD), 2 each

**2133284** Tubing Adapter (15 mm ID x 15 mm OD), 2 each

**2133322** Tubing Adapter, Narrow Bore, 2 each

**2213679** Barb (luer lock – male to 1/89 in ID tubing), 2 each

**2133240** Tubing Adapter (1/4 in NPT male to 1/8 in ID tubing barb fitting), 2 each

**2133202** Tubing Adapter (luer lock 1/16 in to bulkhead connection), 2 each

### Included accessories

**2137275** Operator's Manual

**2392054** VT for Windows® PC Software

**2238659** Serial Cable

**2133387** Tilt Stand

Power cord (country specific)

**2131367** Accessory Kit (includes 16 accessories)

### Ordering information

#### VT PLUS HF Gas Flow Analyzer

**2128272** United States, 120 V

**2399376** Australia, 250 V

**2399383** Schuko, 250 V

**2399390** United Kingdom, 250 V

#### Premium Precision Ventilator Test Kit

(VT PLUS HF Gas Flow Analyzer; and ACCU LUNG portable precision test lung)

**2387329** United States, 120 V

**2425682** Australia, 250 V

**2425694** Schuko, 250 V

**2425701** United Kingdom, 250 V

#### VT-Plus Upgrades

(adds HF capability and RT-200 mode)

**2240945** VT PLUS HF hardware and firmware factory service upgrade (for units lower than hardware v1.01.01; additional flat-rate charge required for factory service/calibration)



# DPM4

## Parameter Tester



The versatile DPM4 tests and calibrates flow and pressure generators used in many medical devices. With several measurements combined in a single, handheld device, the DPM4 provides a cost-effective solution, eliminating the need for multiple test meters.

The DPM4 features a menu-driven interface for simple operation and an easy-to-read screen that displays multiple parameter measurements simultaneously.

### Key features

#### All models

- Palm size
- High accuracy
- Differential pressure, vacuum, and temperature measurements
- Multiple user-selectable units of measurement
- Simultaneous display of multiple parameter measurements
- Leak-detection/leak-rate calculation
- Peak test function to capture peak pressure
- RS-232 for computer control

#### Model 1G

- Pressure measurements in -700 mmHg to 5000 mmHg range

#### Model 1H

- Pressure measurements in -350 mmHg to 350 mmHg range

#### Model 2G

- Barometric pressure, gas flow, and humidity measurements
- Pressure measurements in -700 mmHg to 5000 mmHg range

#### Model 2H

- Barometric pressure, gas flow, and humidity measurements
- Pressure measurements in -350 mmHg to 350 mmHg range

## Specifications

### Model 1H or 2H

Pressure measurement	
Operating range	-350 mmHg to 350 mmHg
Accuracy	± 0.3 % of range
Units of measure	mmHg, mBar, cmH <sub>2</sub> O, psi, inHg, inH <sub>2</sub> O, kg/cm <sup>2</sup> , and kPa

### Model 1G or 2G

Pressure measurement	
Operating range	-700 mmHg to +5000 mmHg
Accuracy	± 0.3 % of range for temperatures from 21 °C to 25 °C and relative humidity from 30 % to 70 % ± 0.3 % of range; ± 0.02 % of range per degree °C for temperatures < 21 °C or > 25 °C with relative humidity from 30 % to 70 %
Units of measure	mmHg, mBar, cmH <sub>2</sub> O, psi, inHg, inH <sub>2</sub> O, kg/cm <sup>2</sup> , and kPa
Temperature measurement (with optional temperature probe)	
Operating range	-40 °C to 200 °C (-40 °F to 392 °F)
Accuracy	± (2 % of reading, + 0.5 °C)
Temperature units	°C, °F

# DPM4

## Parameter Tester

### Specifications

#### Temperature Probe PT-100 and PT-1000

PT-100 Operating range	-200 °C to 750 °C (-328 °F to 1382 °F)
Accuracy	± 0.13 °C @ 100 °C (0.23 °F at 212 °F) ± 0.1 °C @ 0 °C (0.18 °F @ 32 °F) ± 0.2 °C @ 100 °C (0.36 °F @ 212 °F)
PT-1000 operating range	-200 °C to 750 °C (-328 °F to 1382 °F)
Accuracy	0.3 °C (0.5 °F)

**Model 2G or 2H** Note: It is possible to compensate for the sea level and calibrate for offsets.

Pressure measurement	
Operating range	380 mmHg to 825 mmHg
Accuracy	± 2 % of reading
Units of measure	mmHg, mBar, cmH <sub>2</sub> O, psi, inHg, inH <sub>2</sub> O, kg/cm <sup>2</sup> , and kPa
<b>Relative humidity</b> Note: An integrated sensor in the instrument determines relative humidity measurements.	
Operating range	12 % RH to 95 % RH
Accuracy	± 3.5 % of reading ± 2 % @ 25 °C (77 °F)
<b>Gas flow</b> Note: Gas flow measures with an embedded sensor with 11 calibration points to compensate non-linearity: calibration constants are stored in firmware.	
Gas compatibility	Air, N <sub>2</sub> , O <sub>2</sub> , CO, NO, CO <sub>2</sub> , N <sub>2</sub> O, NO <sub>2</sub>
Operating range	-750 ml/min to 750 ml/min
Accuracy	± 1 % of range or ± 5 % of reading
Gas flow units	ml/min or sccm (Standard Cubic Centimeter per Minute)
Peak flow test	Peak flow is captured in the unit selected for flow. A reset key allows to restart the test.

#### Model 1G, 1H, 2G and 2H

Leak test and peak test	
Leak test	Leak rate is computed in the unit selected for pressure over 15, 30, 45 or 60 seconds
Peak test	Peak pressure is captured in the unit selected for pressure. A reset key allows to restart the test.
Temperature	
Operating	15 °C to 35 °C (59 °F to 95 °F)
Storage	0 °C to 50 °C (32 °F to 122 °F)
General information	
Power	9 V alkaline battery RG9 or battery eliminator
Battery life	> 7 hours
Dimensions (LxWxH)	156 mm x 94 mm x 34 mm (6.1 in x 3.7 in x 1.3 in)
Weight	0.4 kg (0.9 lb) with battery

#### Optional accessories

- 2462177** Soft-Sided Carrying Case
- 2461910** PT-100 Temperature Probe
- 2461922** PT-1000 Temperature Probe
- 2461905** Expansion Chamber
- 2461946** Tubing Kit with Inflation Bulb
- 2462335** RS-232 Cable

#### Included accessories

- 2572323** Users Manual
- 2647372** Battery Eliminator
- XXXXXXX** Power Cord (country specific)
- XXXXXXX** One 9 Volt Alkaline Battery

#### Ordering information

##### DPM4 Parameter Tester

- 2583121** Model 1H (± 350 mmHg)
- 2631330** Model 1G (-700 to 5000 mmHg)
- 2637760** Model 2H (± 350 mmHg, Press, Temp, Flow, RH)
- 2637772** Model 2G (-700 to 5000 mmHg, Press, Temp, Flow, RH)

# DPM1B

## Pneumatic Transducer Tester



The DPM1B pneumatic transducer tester is designed to measure the positive and negative pressures of medical devices in either liquid or gaseous form, and to generate pressure within the  $\pm 300$  mmHg range to assist in repair and quality control.

### Key features

- Battery operated
- Generates and measures positive or negative pressures
- Operates with gas and liquid
- Troubleshooting with 1 % accuracy

## Product comparison chart

Model	DPM1B	DPM2Plus	DPM4-1G
Pressure measurement range	-300 mmHg to +300 mmHg	-698 mmHg to +802 mmHg -949 cmH <sub>2</sub> O to +1090 cmH <sub>2</sub> O -374 inH <sub>2</sub> O to +429 inH <sub>2</sub> O -13.50 psi to +15.50 psi -13.50 psi to +100.00 psi	-700 mmHg to +5000 mmHg -950 cmH <sub>2</sub> O to +6797 cmH <sub>2</sub> O -374 inH <sub>2</sub> O to +2678 inH <sub>2</sub> O -13.5 psi to +96.7 psi -93.4 kPa to +666 kPa
Pressure units	1 unit: mmHg	4 units: mmHg, cmH <sub>2</sub> O, inH <sub>2</sub> O, psi	8 units: mmHg, cmH <sub>2</sub> O, inHg, inH <sub>2</sub> O, psi, mBar, kg/cm <sup>2</sup> , and kPa
Pressure Generation	Internal	With optional inflation bulb	With optional inflation bulb
Gas/Liquid operation	Both	Both	Gas only
Temperature measurement	—	—	With optional temperature probe in °C or °F
Barometric pressure	—	—	—
Relative Humidity measurement	—	—	—
Gas flow measurement	—	—	—

## Specifications

Pressure measurement	
Operating range	$\pm 300$ mmHg
Pressure generation range	$\pm 300$ mmHg
Accuracy	$\pm 1$ % of reading or $\pm 1$ mmHg
Resolution	0.1 mmHg
Units of measure	mmHg
Environmental requirements	
Operating temperature	10 °C to +40 °C (+50 °F to +104 °F)
General information	
Display/control	0.5 in LCD with LO BATT indication
Power	9 V alkaline battery
Dimensions (WxDxH)	15.9 cm x 14.6 cm x 3.8 cm (3.6 in x 5.8 in x 1.5 in)
Weight	260 g (10 oz)

### Included accessories

- 2572314 Users Manual  
2242666 3-way Stop Cock Adapter  
6144879 9 V alkaline battery

### Ordering information

- 2249779 DPM 1B Pneumatic Transducer Tester

# DPM2Plus

## Pressure Meter



The DPM2Plus Pressure Meter is designed to measure the positive and negative pressures of medical devices in either liquid or gaseous form to assist in repair and quality control.

When coupled with the optional Parabolic Flow Adapter accessory, the displayed pressure can be interpreted, using the look up table supplied with the parabolic flow adapter to determine flow from medical devices.



### Key features

- Five selectable pressure ranges
- Voltage output to drive a recorder for assessing electronics of pressure-measurement circuit
- Capability to test ophthalmology equipment, lasers, dialysis machines, automatic tourniquets, drainage devices, IV pumps, pressure gauges, ventilators, diagnostic, surgical suction devices, and more
- Air or liquid measurement

### Optional accessories

- 2242653 Catheter Adapter
- 2249177 Parabolic Flow Adapter
- 2200116 Phone to BNC Cable

## Product comparison chart

Model	DPM4-1H	DPM4-2G	DPM4-2H
Pressure measurement range	-350 mmHg to +350 mmHg -475 cmH <sub>2</sub> O to +476 cmH <sub>2</sub> O -187 inH <sub>2</sub> O to +187 inH <sub>2</sub> O -6.8 psi to +6.8 psi -46.7 kPa to +46.7 kPa	-700 mmHg to +5000 mmHg -950 cmH <sub>2</sub> O to +6797 cmH <sub>2</sub> O -374 inH <sub>2</sub> O to +2678 inH <sub>2</sub> O -13.5 psi to +96.7 psi -93.4 kPa to +666 kPa	-350 mmHg to +350 mmHg -475 cmH <sub>2</sub> O to +476 cmH <sub>2</sub> O -187 inH <sub>2</sub> O to +187 inH <sub>2</sub> O -6.8 psi to +6.8 psi -46.7 kPa to +46.7 kPa
Pressure units	8 units: mmHg, cmH <sub>2</sub> O, inHg, inH <sub>2</sub> O, psi, mBar, kg/cm <sup>2</sup> , and kPa	8 units: mmHg, cmH <sub>2</sub> O, inHg, inH <sub>2</sub> O, psi, mBar, kg/cm <sup>2</sup> , and kPa	8 units: mmHg, cmH <sub>2</sub> O, inHg, inH <sub>2</sub> O, psi, mBar, kg/cm <sup>2</sup> , and kPa
Pressure Generation	With optional inflation bulb	With optional inflation bulb	With optional inflation bulb
Gas/Liquid operation	Gas only	Gas only	Gas only
Temperature measurement	With optional temperature probe in °C or °F	With optional temperature probe in °C or °F	With optional temperature probe in °C or °F
Barometric pressure	—	Yes, 4 units: mmHg, inHg, mBar, and hPa	Yes, 4 units: mmHg, inHg, mBar, and hPa
Relative Humidity measurement	—	Yes	Yes
Gas flow measurement	—	-750 ml/min to +750 ml/min Compatible with Air, N <sub>2</sub> , O <sub>2</sub> , CO, NO, CO <sub>2</sub> , N <sub>2</sub> O, NO <sub>2</sub>	-750 ml/min to +750 ml/min Compatible with Air, N <sub>2</sub> , O <sub>2</sub> , CO, NO, CO <sub>2</sub> , N <sub>2</sub> O, NO <sub>2</sub>

## Specifications

Operating range	-698 mmHg to 802 mmHg -949 cmH <sub>2</sub> O to 1090 cmH <sub>2</sub> O -374 inH <sub>2</sub> O to 429 inH <sub>2</sub> O -13.50 PSI to 15.50 PSI -13.5 PSI to 100 PSI
Accuracy	± 1 % of range
Units of measure	mmHg, cmH <sub>2</sub> O, PSI, inH <sub>2</sub> O
Temperature operating requirements	0 °C to 30 °C (32 °F to 86 °F)
Display/control	0.5 in LCD with LO BATT and negative polarity indication
Data outputs	V/psi (all ranges except 100 psi) 0.01 V/psi for 100 psi range
Power	9 V alkaline battery
Dimensions (LxWxH)	14.61 cm x 9.14 cm x 4.83 cm (5.75 in x 3.6 in x 1.9 in)
Weight	0.4 kg (1 lb)

### Included accessories


- 2572323 Operator's Manual
- 2242653 Catheter Adapter
- 2249768 One 9 V Alkaline Battery

### Ordering information

- 2249768 DPM2Plus Pressure Meter



## Test Automation Software

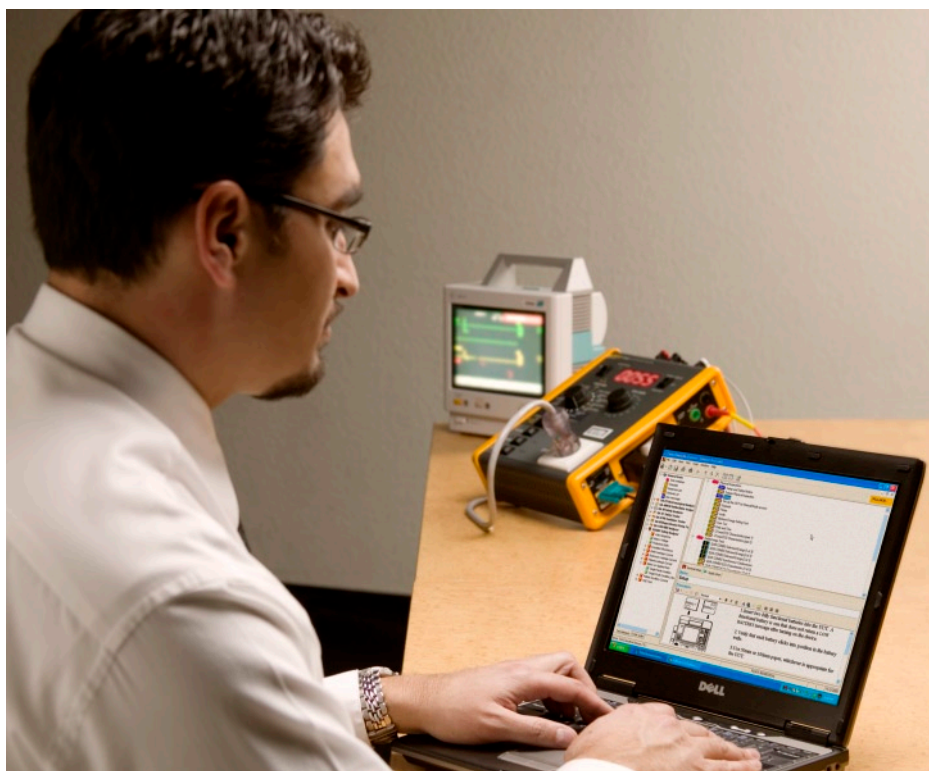

### Key features

- General framework software for performing all types of tests and inspections
- Remote control of Fluke Biomedical testers, and acquisition of test results via RS-232
- Manual/visual tests, performance tests, and electrical-safety tests all executed in one procedure
- Test-procedure and test-result files stored in industry-standard XML format
- Interface capability with some equipment management systems and computerized maintenance management systems
- Ready-to-use or customized test templates make creating standard work easy
- Compatible with a variety of test instruments by Fluke Biomedical for easy standardization

How well do your PM Inspection and post-repair performance-testing processes eliminate sources of human error?

Wish that all technicians would document results the same way?

Do you have enough time to complete all PM Inspection and repair work on your shelf?

### Ansur offers a solution:

**Repeatability**—Creates standard work since everyone tests the same way every time

**Quality**—Can automatically configure and collect data from the compatible test devices to minimize human error and save time

**Productivity**—Ensure that the amount of time required to perform testing is uniform and therefore predictable

Ansur test automation system collects all the observe-and-record manual entries as well as automated measurements from compatible simulators and performance analyzers from Fluke Biomedical.

### Automate with Ansur

Look for this logo in the Fluke Biomedical product catalog to see where test automation can benefit you.



## Specifications

PC requirements	64 MB RAM
	50 MB unused hard drive space for software
	IBM PC/XT compatible Pentium 266 MHz or faster processor
	Hard drive space for result and template files
	32-bit Microsoft Windows® operating system (2000/XP)
	RS-232 ports or USB-RS-232 adapter
Other requirements	License key for each Fluke Biomedical or Metron simulator/analyzer plug-in (accesses full functionality of Ansur and its plug-ins)
	One or more Ansur-compatible Fluke Biomedical or Metron simulators/analyzers (ensures best results for minimizing human error and opportunity for best productivity)

## Test Automation Software

"We used Ansurs to create test sequences that match service manual procedures so every inspection is done the same way every time. We improved quality and uniformity by creating standard work."

-Robert Dorrian, TBS U.K. Telematic & Biomedical Services Ltd. Hope Hospital

### Ordering information

**2462982** Ansurs Test Executive

#### Plug-ins available:

Purchase the modules you need, and then add modules as you acquire new Fluke Biomedical analyzers and simulators.

**2755836** BP Pump 2

**2556755** ESA601

**3454829** ESA612

**3116463** ESA620

**2817641** Impulse 4000

**3091370** Impulse 6000D/7000DP

**2461775** QA-40M/45

**2463016** QA-90

**2462644** QA-1290

**2461802** QA-ES

**2461979** QA-IDS/lagu

**2463002** QA-ST

**2462024** QA-VTM

**2817226** QED 6

**3337356** TNT 12000

#### Test Automation Bundles

**available:** Purchase modules along with the Fluke Biomedical instrument of choice

**3334821** BP Pump 2L NIBP, US 120V w/Test Automation

**3334839** BP Pump 2L NIBP, AUS 250V w/Test Automation

**3334842** BP Pump 2L NIBP, DEN 250V w/Test Automation

**3334856** BP Pump 2L NIBP, SHK 250V w/Test Automation

**3334863** BP Pump 2L NIBP, ISR 250V w/Test Automation

**3334874** BP Pump 2L NIBP, ITAL 250V w/Test Automation

**3334888** BP Pump 2L NIBP, IND 250V w/Test Automation

**3334895** BP Pump 2L NIBP, SWZ 250V w/Test Automation

**3334901** BP Pump 2L NIBP, UK 250V w/Test Automation

**3334912** BP Pump 2M NIBP, US 120V w/Test Automation

**3334920** BP Pump 2M NIBP, AUS 250V w/Test Automation

**3334935** BP Pump 2M NIBP, DEN 250V w/Test Automation

**3334947** BP Pump 2M NIBP, SHK 250V w/Test Automation

**3334958** BP Pump 2M NIBP, ISR 250V w/Test Automation

**3334964** BP Pump 2M NIBP, ITAL 250V w/Test Automation

**3334973** BP Pump 2M NIBP, IND 250V w/Test Automation

**3334986** BP Pump 2M NIBP, SWZ 250V w/Test Automation

**3334999** BP Pump 2M NIBP, UK 250V w/Test Automation

**3334732** ESA601, 230V AUS w/Test Automation

**3334744** ESA601, DEU 230V SHK w/Test Automation

**3334759** ESA601, FRA 230V SHK w/Test Automation

**3334767** ESA601, ITA 230V SHK w/Test Automation

**3334771** ESA601, ISR 230V w/Test Automation

**3334780** ESA601, 230V SHK w/Test Automation

**3334798** ESA601, 230V UK w/Test Automation

**3334800** ESA601, 115V IEC w/Test Automation

**3334817** ESA601, 115 AAMI w/Test Automation

**3460932** ESA612, US 115 V w/Test Automation

**3460959** ESA612, EUR 230 V w/Test Automation

**3460944** ESA612, FR 230 V w/Test Automation

**3460967** ESA612, ISR 230 V w/Test Automation

**3460971** ESA612, AUS 230V w/Test Automation

**3460980** ESA612, UK 230 V w/Test Automation

**3460998** ESA612, SWI 230V w/Test Automation

**3461001** ESA612, THAI 230V w/Test Automation

**3462285** ESA612, JPN 230V w/Test Automation

**3326935** ESA620, US 115V 20A w/Test Automation

**3326947** ESA620, EUR 230V w/Test Automation

**3326958** ESA620, FR 230V w/Test Automation

**3326964** ESA620, ISR 230V w/Test Automation

**3326986** ESA620, AUS 230V w/Test Automation

**3326999** ESA620, SWI 230V w/Test Automation

**3327002** ESA620, UK 230V w/Test Automation

**3326874** Impulse 7KDP, US 120V w/Test Automation

**3326888** Impulse 7KDP, SHK w/Test Automation

**3326895** Impulse 7KDP, UK w/Test Automation

**3326901** Impulse 7KDP, JPN w/Test Automation

**3326912** Impulse 7KDP, AUS w/Test Automation

**3326920** Impulse 7KDP, IN w/Test Automation

**3319736** QA-ES, US 115V w/Test Automation

**3319749** QA-ES, SHK 230V w/Test Automation

**3319751** QA-ES, UK 230V w/Test Automation

**3319760** QA-ES, AUS 230V w/Test Automation

**3319772** QA-ES, JPN 100V w/Test Automation

**3327016** Kit, TA-LAGU, 1 Channel Lagu, with Test Automation

**3327025** Kit, TA-LAGU, 2 Channel Lagu with Test Automation

**3335538** TNT 12000, w/Test Automation

**3340639** TNT 12000WD, w/Test Automation

# medTester 5000C

## Automated Biomedical Equipment Test System



The medTester 5000C is an automated system designed for electrical safety testing and performance verification. It is compatible with most Fluke Biomedical testing devices and a majority of the popular Computerized Maintenance Management Systems (CMMS) in the US. The medTester 5000C provides a completely integrated solution for standardized and streamlined testing and record keeping.

### Key features

- Easy verification of biomedical equipment to manufacturer's specifications
- Ten preprogrammed and five user-programmable electrical-safety-testing sequences
- Convenient transfer of equipment inventory and testing procedures from CMMS
- Module options to automate testing of most Fluke Biomedical testing devices
- Automatic storage of detailed test results for printing or transfer to CMMS
- Compliant with ANSI/AAMI (1993) and NFPA-99 (2005) standards
- 20 A device testing with GFCI protection
- Wedge hardware option for extended serial port use, optional PC-style keyboard and barcode scan gun

### Specifications

<b>Modes of operation</b>	Fully equipped, with four operational modes: manual, autosequence, medCheck, and remote control
<b>Input power supply</b>	Line voltage/frequency input: 115 V ac $\pm$ 10 %/60 Hz
<b>Test-receptacle type</b>	USA, 20 A
<b>System/line voltage</b>	
<b>Range (full scale)</b>	200 V
<b>Accuracy</b>	$\pm$ 5 % of range $\pm$ 1 LSD
<b>Resolution</b>	0.1 V
<b>Equipment current</b>	
<b>Range (full scale)</b>	0 A to 20 A
<b>Accuracy</b>	$\pm$ 5 % of range
<b>Resolution</b>	0.01 A
<b>Ground resistance</b>	
<b>Range (full scale)</b>	0 $\Omega$ to 2 $\Omega$
<b>Accuracy</b>	$\pm$ 1 % of range
<b>Resolution</b>	0.001 $\Omega$ (1 m $\Omega$ )
<b>Current source</b>	100 mA dc
<b>Measurement type</b>	True four-terminal technique
<b>Test leads</b>	Kelvin (2) insulated clip
<b>Leakage-current/voltage gradient</b>	
<b>Ranges (full scale)</b>	200 $\mu$ A and 2000 $\mu$ A or mV
<b>Accuracy</b>	DC and 48 Hz to 1 kHz, $\pm$ 1 % of reading; 1 kHz to 100 kHz, $\pm$ 2.5 % of reading; 100 kHz to 1 MHz, $\pm$ 5 % of reading
<b>Resolution</b>	0.1 $\mu$ A or 0.1 mV
<b>Measurement type</b>	True-rms (autoranging) (ac + dc or dc only response)
<b>Test-load selection</b>	ANSI/AAMI ES1 1993
<b>Test-load impedance</b>	1000 $\Omega$ $\pm$ 1 % at dc
<b>Isolation test</b>	
<b>Test selection (full scale)</b>	Patient leads to ground
<b>Lead combinations</b>	All leads; or individual leads RL, RA, LA, LL, and V1/V6 (V1 through V6 tested as a single lead)
<b>Available current</b>	Limited by internal 120 k $\Omega$ resistor
<b>Resolution</b>	0.1 $\mu$ A
<b>Ranges (full scale)</b>	200 $\mu$ A and 2000 $\mu$ A

### Optional accessories

- 2245136** Performance Enhancement Module 2: RS-232/printer
- 2245149** Performance Enhancement Module 3: 100 records
- 2245151** Performance Enhancement Module 4: Expanded memory
- 2245160** Performance Enhancement Module 5: Waves/extended test
- 2245172** Performance Enhancement Module 6: Data transfer
- 2245185** Performance Enhancement Module 7: medCheck
- 2245197** Performance Enhancement Module 8: Defibrillator
- 2245201** Performance Enhancement Module 9: IV pump
- 2245212** Performance Enhancement Module 10: CMMS interface
- 2245220** Performance Enhancement Module 11: ESU
- 2245235** Performance Enhancement Module 12: SpO<sub>2</sub>
- 2245247** Performance Enhancement Module 13: Pacer
- 2245258** Performance Enhancement Module 14: NIBP

# medTester 5000C

## Automated Biomedical Equipment Test System

### Specifications

Isolation test (continued)	
ECG binding posts	10 posts, American Hospital Association color-coded RL, RA, LA, LL, V1-V6
Compatibility	Compatible with both 3.2 mm and 4 mm pins and disposable snap electrodes
Performance waveforms	
ECG performance test waves (lead I, Vp-p)	Square wave: 2 Hz, 1 mV
DC pulse	4 s, 1 mV
Sine wave	0.5 Hz, 10 Hz, 40 Hz, 60 Hz, and 100 Hz, 1 mV
Square wave	1 kHz, 1 mV
Triangle	2 Hz, 1 mV
CMRR	60 Hz sine wave with 1 kΩ imbalance in LA
Normal sinus	30 BPM, 60 BPM, 120 BPM, and 240 BPM
Arrhythmias	Atrial fibrillation Second-degree A-V block, type 1 Premature atrial contractions Missed beat at 80 BPM and 120 BPM PVC 1 left PVC 2 right Multifocal PVCs PVC 1, R on T A pair of PVCs Run of 5 PVCs Run of 11 PVCs, MF Right bundle branch block; Ventricular tachycardia Ventricular fibrillation Asystole
Environmental requirements	
Operating temperature	15 °C to 55 °C (59 °F to 95 °F)
Storage temperature	0 °C to 50 °C (32 °F to 122 °F)
General information	
Clock/date functions	Time and date formats: 24 hour (hh:mm:ss) and mm/dd/yy
Safety certification	Canadian Standards Association CSA C22.2 No 231-M89 (1989)
Display characteristics	Type: 80 character, alphanumeric liquid crystal display (LCD) Size: 2 lines x 40 characters
Backlight	LED with adjustable brightness control
Dimensions (LxWxH)	25.4 cm x 35.0 cm x 10.2 cm (10 in x 13.8 in x 4 in)
Weight	5 kg (11 lb)

### Optional accessories (continued)

**2245264** Wedge Adapter (eight 25 in serial ports, as well as AT or PS/2 keyboard port)  
**2245061** Mini PC-style External Keyboard (83 keys, AT or PS/2, wedge adapter required)  
**2245092** Laser Barcode Gun (wedge adapter required)  
**2245515** 5000C-PRINTER, Brady TLS Test Label Printer Kit medTester 5000C V 5.10 or greater and 115 V ac only  
**2248606** Multipurpose Hard-sided Carrying Case for medTester 5000C with wedge adapter  
**2248587** Multi-purpose Hard-sided Carrying Case for medTester 5000C without wedge adapter  
**Interface cables:** Call for specific test-device connection cables

### Included accessories

**medTester 5000C**  
**2243153** Users Manual  
**2392871** Soft Vinyl Accessory Pouch  
**2392617** Two Kelvin Cables  
**2392639** Two Ground-pin Adapters  
**medTester 5000C/B, CMMS Connectivity Bundle**  
**2245136** RS-232/Printer Module  
**2245149** 100 Record Storage Module  
**2245151** Expanded Record Storage Module  
**2245172** Data-Transfer Module Med  
**2245185** Check Module  
**2245212** CMMS Interface Module

### Ordering information

**2247382** medTester 5000C (20 A, 115 V ac)  
**2585098** medTester 5000C/B, CMMS Connectivity Bundle

### medTester 5000C is compatible with the following test tools:

- Impulse 4000 Defib Analyzer
- IDA 4 plus IV Pump Analyzer
- RF303RS ESU Analyzer
- Index 2XL SpO2 Analyzer
- SigmaPace 1000 Pacemaker Analyzer
- Cufflink NIBP Simulator

### medTester also interfaces with the following legacy test tools:

- Impulse 3000 Defib Analyzer
- Infustest 2000 Series D IVPUMP Analyzer
- IPT-1 IVPUMP Analyzer
- IPT-MC IV IVPUMP Analyzer
- 402A ESU Analyzer
- 454A ESU Analyzer
- Oxitest Plus/Plus7 SpO<sub>2</sub> Analyzer
- CardioSat 100 SpO<sub>2</sub> Analyzer



# INCUB™

## Incubator Analyzer



Faulty incubator controls lengthen hospital stays, and increase healthcare costs, making thorough incubator testing essential.

Designed around AAMI and IEC standards that specify incubator and radiant warmer sound levels and thermal characteristics, the INCUB simultaneously measures airflow, relative humidity, sound, and four independent



temperatures. Adjustable measurement intervals allow technicians to configure the unit to meet their facilities' testing requirements. Technicians are free to do other work while the device collects and records data.

INCUB software lets technicians upload setup parameters and download the test results to a PC file, or print the data in reports with full-color charts and graphs.

### Key features

- Simultaneous measurement of humidity, airflow, sound, and 4 independent temperatures
- 24-hour continuous testing (battery); 35-hour continuous testing (main power)
- Battery operated
- Adjustable measurement intervals
- Compatible with closed, forced-convection incubators and open infant warmers
- Stand-alone measurement or automated testing with PC
- Windows® compatible INCUB software for easy data collection, analysis, and documentation
- Numerical and full-color graphical reports



## Specifications

Power supply	
Input voltage range	100 V ac to 240 V ac
Input frequency range	47 Hz to 63 Hz
Battery	Rechargeable sealed lead-acid type NP7-6 YUASA, 6 V, 7 Ah; operates for 24 hours continuously; low-battery alert
Sound level	
Measuring range	30 dbA to 80 dbA
Resolution	0.1 dbA
Accuracy	+5 dbA @ 30 dbA to 80 dbA
Relative humidity (without condensation)	
Measuring range	0 % to 100 % RH, non-condensing
Resolution	0.1 % RH
Accuracy	± 5 % RH for 0 % to 90 % RH at 77 °F to 104 °F (25 °C to 40 °C) or ± 5.3 % RH for 0 % to 100 % RH at 77 °F to 104 °F (25 °C to 40 °C)
Temperature measurement	
Measuring range	5 °C to 70 °C (41 °F to 158 °F)
Resolution	0.1 °C (32 °F)
Accuracy	+0.5 °C (+0.9 °F) +1 LSB of range from 25 °C to 40 °C (77 °F to 104 °F)
Airflow	
Measurement range	0.1 m/s to 0.7 m/s
Resolution	0.01 m/s
Accuracy	from 0.1 m/s to 0.5 m/s reading ± 0.1 m/s at temperature 25 °C to 40 °C (77 °F to 104 °F) and humidity 50 % RH ± 15 % RH
General information	
Measurement interval	Via PC: Adjustable from 1 minute to 10 minutes
Storage temperature	-20 °C to 50 °C (-4 °F to 122 °F)
Operating temperature	10 °C to 40 °C (50 °F to 104 °F)
Dimensions (LxWxH)	27 cm x 20 cm x 14 cm (10.6 in x 7.8 in x 5.5 in)
Weight	3 kg (6.6 lb)

### Included accessories

- 2206965 Users Manual
- 2248900 Soft-Sided Carrying Case
- 2239025 Airflow Sensor
- 2391761 Universal AC Battery Charger with Worldwide Mains Adapter Set
- 2391866 Serial Cable DB9F to DB9F
- 2391789 Serial Adapter DB-9M to DB-25F
- 2213928 Outside Temperature probe holder
- 2239002 Adapter for Radiant Infant Warmer Assembly
- 2213919 INCUB PC Software (one CD)

### Ordering information

- 2250148 Incubator Analyzer

# MAXO<sub>2</sub>+AE

## Oxygen Analyzer

### Key features

- One-touch calibration, with reminder
- Long battery life (approximately 5,000 hours)
- Impact resistant and drip proof
- External MAX-250E Oxygen Sensor



The MAXO<sub>2</sub>+AE is an oxygen analyzer that measures the oxygen concentration in a flow of gas from a medical gas source or through a medical gas-flow device such as a ventilator or anesthesia system, or within an infant incubator. It is handheld and rugged to suit the needs of portable use. The MAXO<sub>2</sub>+ AE comes equipped with a two-year warranty on both analyzer and sensor.



## Specifications

Measurement range	0 % to 100 %
Resolution	0.1 %
Accuracy and linearity	1 % of full scale at constant temperature, RH and pressure when calibrated at full scale
Total accuracy	± 3 % actual oxygen level over full operating range
Response time	90 % of final value in approx. 15 sec at 23 °C
Warm-up time	None required
<b>Power supply</b>	
Battery life	Approx. 5000 hours with continuous use
Low battery indication	"BAT" icon displayed on LCD
Sensor type	Maxtec® MAX-250E for AE model
Expected sensor life	> 900,000 O <sub>2</sub> % hours minimum, 2 years in typical medical applications
Power requirements	2, AA alkaline batteries
<b>Environmental requirements</b>	
Operating temperature	15 °C to 40 °C (59 °F to 104 °F)
Storage temperature	-15 °C to 50 °C (5 °F to 122 °F)
Atmospheric pressure	-800 mBar to 1013 mBar
Relative humidity	Operating range: 0 % to 95 % (non-condensing)
<b>General information</b>	
Dimensions (LxWxH)	38 mm x 76 mm x 914 mm (1.5 in x 3.0 in x 36.0 in)
Weight	285 g (0.6 lb)

### Included accessories

Users Manual  
MAX-250 External Oxygen Sensor  
Oxygen Sensor Cable  
2448051 Breathing Circuit tee

### Ordering information

2511920 MAXO<sub>2</sub>+AE Oxygen Analyzer

# Service and Calibration

**World-class facility. World-class service.**



Fluke Biomedical's Global Calibration Lab is NVLAP Lab Code 200566-0 accredited, adheres to ISO 17025:2005, ANSI Z540, Mammography MQSA, and CNSC, and is traceable to national and international standards.

Fluke Biomedical offers one-stop, bulk contracts for managing larger instrument pools, including various asset-management alternatives for pools larger than 150 units. Fluke Biomedical's asset-management program takes over your grueling task of instrument tracking and allows you to use your time more productively.

If you have a large number of instruments that require service, you

can greatly benefit from this quality service. Proper protocols are strictly followed, eliminating the problems with inspectors and audits that can result when other less-qualified labs perform the calibrations. Instrumentation includes Fluke Biomedical as well as other industry models.

**Fluke Biomedical's Global Calibration Laboratory is equipped to calibrate and repair the following types of instruments:**

- Area Monitors
- Barometers
- Blood Pressure Simulators
- Defibrillators/External Pace Maker Analyzers
- Densitometers
- Diode Detectors
- Dosimeters
- Electrical Safety Analyzers
- Incubator Analyzers
- Ion Chambers
- IV Pump Analyzers
- kVp Meters
- mAs Meters
- Electrical Multimeters
- Oscilloscopes
- Patient Simulators
- Pressure Meters/Parameter Testers
- Radiation Multimeters
- Sensitometers
- SpO<sub>2</sub> Simulators/Analyzers
- Thermometers
- Test Lungs
- Ultra Sound Analyzers
- Velometers
- Ventilators/Gas flow Analyzers

## Calibration Beam Specifications

### Tungsten Anode

NIST-Traceable Techniques						
Equivalent Beam Code	Potential (kV)	Filtration				HVL mm Al
		mm Al	mm Cu	mm Sn	mm Pb	
L20	20					0.07
L100	100	1.98				2.75
M30	30	0.50				0.33
M50	50	1.00				0.98
M60	60	1.50				1.68
M80	80	2.6				2.98
M100	100	5.0				5.1
M150	150	5.0	0.25			10.2
M200	200	4.1	1.12			14.9
M250	250	5.0	3.2			18.5
H50	50	4.0			0.12	4.4
H60	60	4.0	0.6			6
H100	100	4.0	5			13.5
H150	150	4.0	4	1.5		16.8
H200	200	4	0.6	4	0.7	19.5
H250	250	4	0.6	1	2.7	21.5

PTB-Traceable Techniques						
Equivalent Beam Code	Potential (kV)	Filtration				HVL mm Al
		mm Al	mm Cu	mm Sn	mm Pb	
DV30	30	2.5				0.98
DV40	40	2.5				1.44
DV50	50	2.5				1.81
DV60	60	2.5				2.13
DV70	70	2.5				2.45
DV80	80	2.5				2.78
DV90	90	2.5				3.1
DV100	100	2.5				3.48
DV120	120	2.5				4.15
DV150	150	2.5				5.36
DH40	40	4				2.2
DH50	50	10				3.75
DH60	60	16				5.35
DH70	70	21				6.77
DH80	80	26.0				8.12
DH90	90	30.0				9.26
DH100	100	34.0				10.15
DH120	120	40.0				11.67
DH150	150	45.0				13.36

# Service and Calibration

**World-class facility. World-class service.**

## Calibration Beam Specifications

### Molybdenum/Rhodium Anode

NIST-Traceable Techniques					
Equivalent Beam Code	Potential (kV)	Filtration			HVL mm Al
		mm Mo	mm Rh	mm Al	
Mo/Mo 28	28	0.032			0.33
Mo/Mo 35	35	0.032			0.39
Mo/Rh 28	28	0.029			0.41
Rh/Rh 25	25		0.029		0.35
Rh/Rh 40	40		0.029		0.56
Mo/Mo28x	28	0.030		2	0.63
Rh/Rh/35x	35		0.029	2	0.898

PTB-Traceable Techniques					
Equivalent Beam Code	Potential (kV)	Filtration			HVL mm Al
		mm Mo	mm Rh	mm Al	
MV20	20	0.030			0.223
MV25	25	0.030			0.282
MV30	30	0.030			0.337
MV35	35	0.030			0.374
MV40	40	0.030			0.402
MV50	50	0.030			0.440
MV20	20	0.030		2	0.450
MV25	25	0.030		2	0.580
MV30	30	0.030		2	0.670
MV35	35	0.030		2	0.749
MV40	40	0.030		2	0.825
MV50	50	0.030		2	0.968



### Service Center/Repair/Calibration US

Fluke Biomedical  
6045 Cochran Road  
Cleveland OH 44139-3303  
Tel: 440-498-2560  
Toll free: 800-850-4608 ext 2564  
Email: [globalcal@flukebiomedical.com](mailto:globalcal@flukebiomedical.com)

### Service Center/Repair/Calibration Europe

Fluke Biomedical Europe  
Science Park Eindhoven 5110  
5692EC Son, The Netherlands  
Tel: +31 (40) 267 5435  
Fax: +31 (40) 267 5436  
Email: [servicedesk@fluke.nl](mailto:servicedesk@fluke.nl)

[www.flukebiomedical.com/service](http://www.flukebiomedical.com/service)



# Publications


The following Fluke Biomedical catalogs are also available



## Fluke Biomedical Diagnostic Imaging QA

The Diagnostic Imaging QA catalog is a comprehensive source book of solutions for the Imaging QA Technologist, Physicist, Biomedical/Clinical Engineer, or Service Engineer. The catalog contains information about the test devices, phantoms, and accessories needed to manage diagnostic imaging QA and maintain regulatory-compliance.


For more information, contact [sales@flukebiomedical.com](mailto:sales@flukebiomedical.com)



## Fluke Biomedical Radiation Oncology QA

The Fluke The Radiation Oncology QA catalog provides a full range of QA solutions for the Radiation Oncology Physicist, Therapist, and Dosimetrist. The catalog contains information about the linear accelerator QA instruments, radiation oncology chambers, phantoms, and accessories needed to manage radiation oncology QA and maintain a safe, regulatory-compliant facility.

For more information, contact [sales@flukebiomedical.com](mailto:sales@flukebiomedical.com)



## Fluke Biomedical Radiation Safety

The Radiation Safety catalog highlights devices used to measure radiation levels, manage regulatory QA requirements, and aide in radiation emergencies. These devices are intended for Radiation Safety Officers (RSOs), Health Physicists, Emergency Responders and other radiation-minded professionals. The catalog contains information about a variety of survey meters and probes, area monitors, and other radiation-monitoring accessories.

For more information, contact [sales@flukebiomedical.com](mailto:sales@flukebiomedical.com)

Your authorized Fluke Biomedical distributor

riešenia na presné meranie™

Elso Philips Service; tel: +421 32 6582410  
email: [elso@elso.sk](mailto:elso@elso.sk); web: [www.elso.sk](http://www.elso.sk)

## Fluke Biomedical.

*Better products. More choices. One company.*

**Fluke Biomedical**  
6045 Cochran Road  
Cleveland, OH 44139-3303 U.S.A.

**Fluke Biomedical Europe**  
Science Park Eindhoven 5110  
5692EC Son, The Netherlands

**For more information, contact us:**

In the U.S.A. (800) 850-4608 or  
Fax (440) 349-2307

In Europe/M-East/Africa +31 40 267 5435 or  
Fax +31 40 267 5436  
From other countries +1 (440) 248-9300 or  
Fax +1 (440) 349-2307

Email: [sales@flukebiomedical.com](mailto:sales@flukebiomedical.com)

Web access: [www.flukebiomedical.com](http://www.flukebiomedical.com)

©2007-2009 Fluke Biomedical. Specifications subject to change without notice. Printed in U.S.A.  
6/2009 3082069B C-EN-N